

DATA SHEET



Single Phase Induction Motor - Squirrel Cage

Customer :

Product line : Farm Duty Single-Phase

Product code : 10723420

Frame : B56
 Output : 0.33 HP (0.25 kW)
 Poles : 4
 Frequency : 60 Hz
 Rated voltage : 115/230 V
 Rated current : 5.60/2.80 A
 L. R. Amperes : 32.5/16.2 A
 LRC : 5.8x(Code N)
 No load current : 4.60/2.30 A
 Rated speed : 1750 rpm
 Slip : 2.78 %
 Rated torque : 0.137 kgfm
 Locked rotor torque : 340 %
 Breakdown torque : 280 %
 Insulation class : B
 Service factor : 1.15
 Moment of inertia (J) : 0.0026 kgm²

Locked rotor time : 10s (cold) 6s (hot)
 Temperature rise : 80 K
 Duty cycle : Cont.(S1)
 Ambient temperature : -20°C to +40°C
 Altitude : 1000 m.a.s.l.
 Protection degree : IP55
 Cooling method : IC411 - TEFC
 Mounting : F-1
 Rotation¹ : Both (CW and CCW)
 Noise level² : 55.0 dB(A)
 Starting method : Direct On Line
 Approx. weight³ : 9.9 kg

Output	50%	75%	100%
Efficiency (%)	49.0	58.0	61.0
Power Factor	0.44	0.53	0.62

Foundation loads
 Max. traction : 7 kgf
 Max. compression : 17 kgf

	Drive end	Non drive end
Bearing type	6203 ZZ	6202 ZZ
Sealing	V'Ring	V'Ring
Lubrication interval	-	-
Lubricant amount	-	-
Lubricant type	Mobil Polyrex EM	

Notes:

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		1 / 2		
Date	31/01/2024			

LOAD PERFORMANCE CURVE


Single Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : Farm Duty Single-Phase

Product code : 10723420

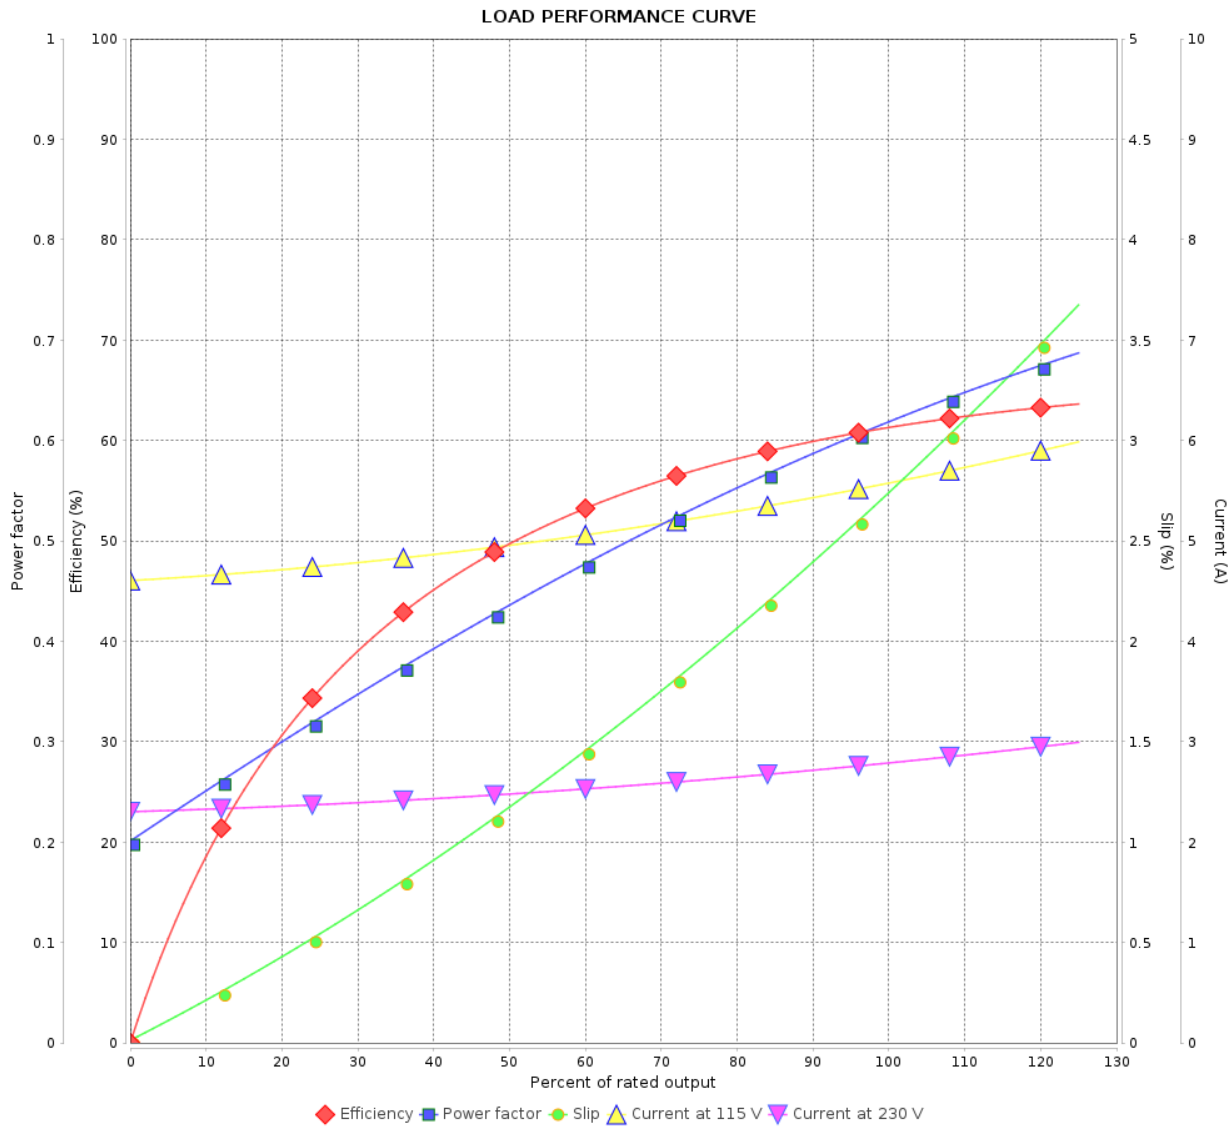

Performance : 115/230 V 60 Hz 4P

Rated current : 5.60/2.80 A
 LRC : 5.8
 Rated torque : 0.137 kgfm
 Locked rotor torque : 340 %
 Breakdown torque : 280 %
 Rated speed : 1750 rpm

Moment of inertia (J) : 0.0026 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : B
 Service factor : 1.15
 Temperature rise : 80 K

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 2	Revision
Checked by				
Date	31/01/2024			