

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

| | | | | | | |
|--|-------------------------|------------------|-----------------------------|--|---------------|----------------|
| Customer : | | | | | | |
| Product line : W22 NEMA Premium Efficiency Three-Phase | | | Product code : 11164874 | | | |
| Frame | : 504/5T | | Locked rotor time | : 36s (cold) 20s (hot) | | |
| Output | : 250 HP (185 kW) | | Temperature rise | : 80 K | | |
| Poles | : 4 | | Duty cycle | : Cont.(S1) | | |
| Frequency | : 60 Hz | | Ambient temperature | : -20°C to +40°C | | |
| Rated voltage | : 575 V | | Altitude | : 1000 m.a.s.l. | | |
| Rated current | : 222 A | | Protection degree | : IP55 | | |
| L. R. Amperes | : 1440 A | | Cooling method | : IC411 - TEFC | | |
| LRC | : 6.5x(Code G) | | Mounting | : F-1 | | |
| No load current | : 68.0 A | | Rotation ¹ | : Both (CW and CCW) | | |
| Rated speed | : 1785 rpm | | Noise level ² | : 75.0 dB(A) | | |
| Slip | : 0.83 % | | Starting method | : Direct On Line | | |
| Rated torque | : 102 kgfm | | Approx. weight ³ | : 1162 kg | | |
| Locked rotor torque | : 229 % | | | | | |
| Breakdown torque | : 220 % | | | | | |
| Insulation class | : F | | | | | |
| Service factor | : 1.15 | | | | | |
| Moment of inertia (J) | : 3.77 kgm ² | | | | | |
| Design | : B | | | | | |
| Output | 50% | 75% | 100% | Foundation loads | | |
| Efficiency (%) | 95.8 | 96.2 | 96.2 | Max. traction : 1179 kgf | | |
| Power Factor | 0.78 | 0.85 | 0.87 | Max. compression : 2341 kgf | | |
| Losses at normative operating points (speed;torque), in percentage of rated output power | | | | | | |
| P1 (0,9;1,0) | P2 (0,5;1,0) | P3 (0,25;1,0) | P4 (0,9;0,5) | P5 (0,5;0,5) | P6 (0,5;0,25) | P7 (0,25;0,25) |
| 4.4 | 3.4 | 2.9 | 2.4 | 1.6 | 1.2 | 0.7 |
| | | <u>Drive end</u> | | <u>Non drive end</u> | | |
| Bearing type | : | 6319 C3 | | 6316 C3 | | |
| Sealing | : | WSeal | | WSeal | | |
| Lubrication interval | : | 8000 h | | 10000 h | | |
| Lubricant amount | : | 45 g | | 34 g | | |
| Lubricant type | : | Mobil Polyrex EM | | | | |
| Notes: | | | | | | |
| This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load. | | | | These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1. | | |
| Rev. | Changes Summary | | | Performed | Checked | Date |
| Performed by | | | | | | |
| Checked by | | | | | Page | Revision |
| Date | 13/01/2024 | | | | 1 / 2 | |

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11164874

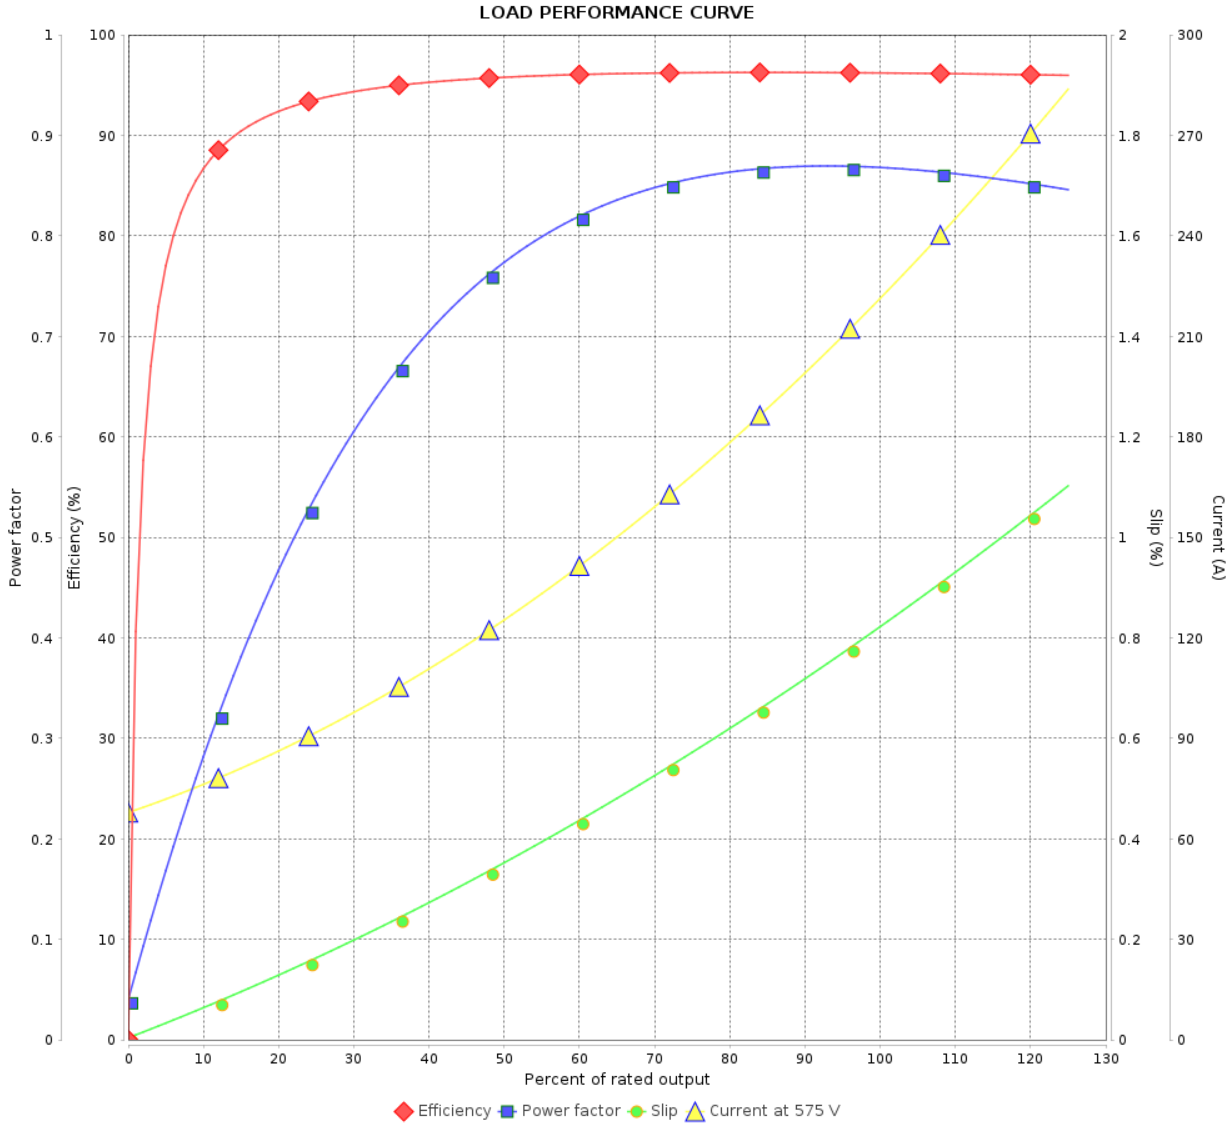

Performance : 575 V 60 Hz 4P

Rated current : 222 A
 LRC : 6.5
 Rated torque : 102 kgfm
 Locked rotor torque : 229 %
 Breakdown torque : 220 %
 Rated speed : 1785 rpm

Moment of inertia (J) : 3.77 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

| Rev. | Changes Summary | Performed | Checked | Date |
|--------------|-----------------|-----------|---------------|----------|
| | | | | |
| Performed by | | | Page 2 / 2 | Revision |
| Checked by | | | | |
| Date | 13/01/2024 | | | |