

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase Product code : 11165224

| | | | |
|-----------------------|-------------------------|-----------------------------|------------------------|
| Frame | : 445/7T | Locked rotor time | : 28s (cold) 16s (hot) |
| Output | : 200 HP (150 kW) | Temperature rise | : 80 K |
| Poles | : 4 | Duty cycle | : Cont.(S1) |
| Frequency | : 60 Hz | Ambient temperature | : -20°C to +40°C |
| Rated voltage | : 575 V | Altitude | : 1000 m.a.s.l. |
| Rated current | : 184 A | Protection degree | : IP55 |
| L. R. Amperes | : 1251 A | Cooling method | : IC411 - TEFC |
| LRC | : 6.8x(Code G) | Mounting | : F-1 |
| No load current | : 56.0 A | Rotation ¹ | : Both (CW and CCW) |
| Rated speed | : 1785 rpm | Noise level ² | : 73.0 dB(A) |
| Slip | : 0.83 % | Starting method | : Direct On Line |
| Rated torque | : 81.3 kgfm | Approx. weight ³ | : 1004 kg |
| Locked rotor torque | : 229 % | | |
| Breakdown torque | : 250 % | | |
| Insulation class | : F | | |
| Service factor | : 1.15 | | |
| Moment of inertia (J) | : 3.21 kgm ² | | |
| Design | : B | | |

| | | | | | | |
|----------------|------|------|------|------|------------------|------------|
| Output | 25% | 50% | 75% | 100% | Foundation loads | |
| Efficiency (%) | 95.7 | 95.8 | 96.2 | 96.2 | Max. traction | : 1276 kgf |
| Power Factor | 0.50 | 0.73 | 0.82 | 0.85 | Max. compression | : 2280 kgf |

Losses at normative operating points (speed;torque), in percentage of rated output power

| | | | | | | |
|--------------|--------------|---------------|--------------|--------------|---------------|----------------|
| P1 (0,9;1,0) | P2 (0,5;1,0) | P3 (0,25;1,0) | P4 (0,9;0,5) | P5 (0,5;0,5) | P6 (0,5;0,25) | P7 (0,25;0,25) |
| 4.0 | 3.2 | 2.9 | 2.0 | 1.3 | 0.9 | 0.5 |

| | | | |
|----------------------|---|------------------|----------------------|
| | | <u>Drive end</u> | <u>Non drive end</u> |
| Bearing type | : | NU-319 C3 | 6316 C3 |
| Sealing | : | WSeal | WSeal |
| Lubrication interval | : | 5000 h | 10000 h |
| Lubricant amount | : | 45 g | 34 g |
| Lubricant type | : | Mobil Polyrex EM | |

Notes:

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

| | | | | |
|--------------|-----------------|-----------|---------|----------|
| Rev. | Changes Summary | Performed | Checked | Date |
| Performed by | | | | |
| Checked by | | | Page | Revision |
| Date | 13/01/2024 | | 1 / 2 | |

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11165224

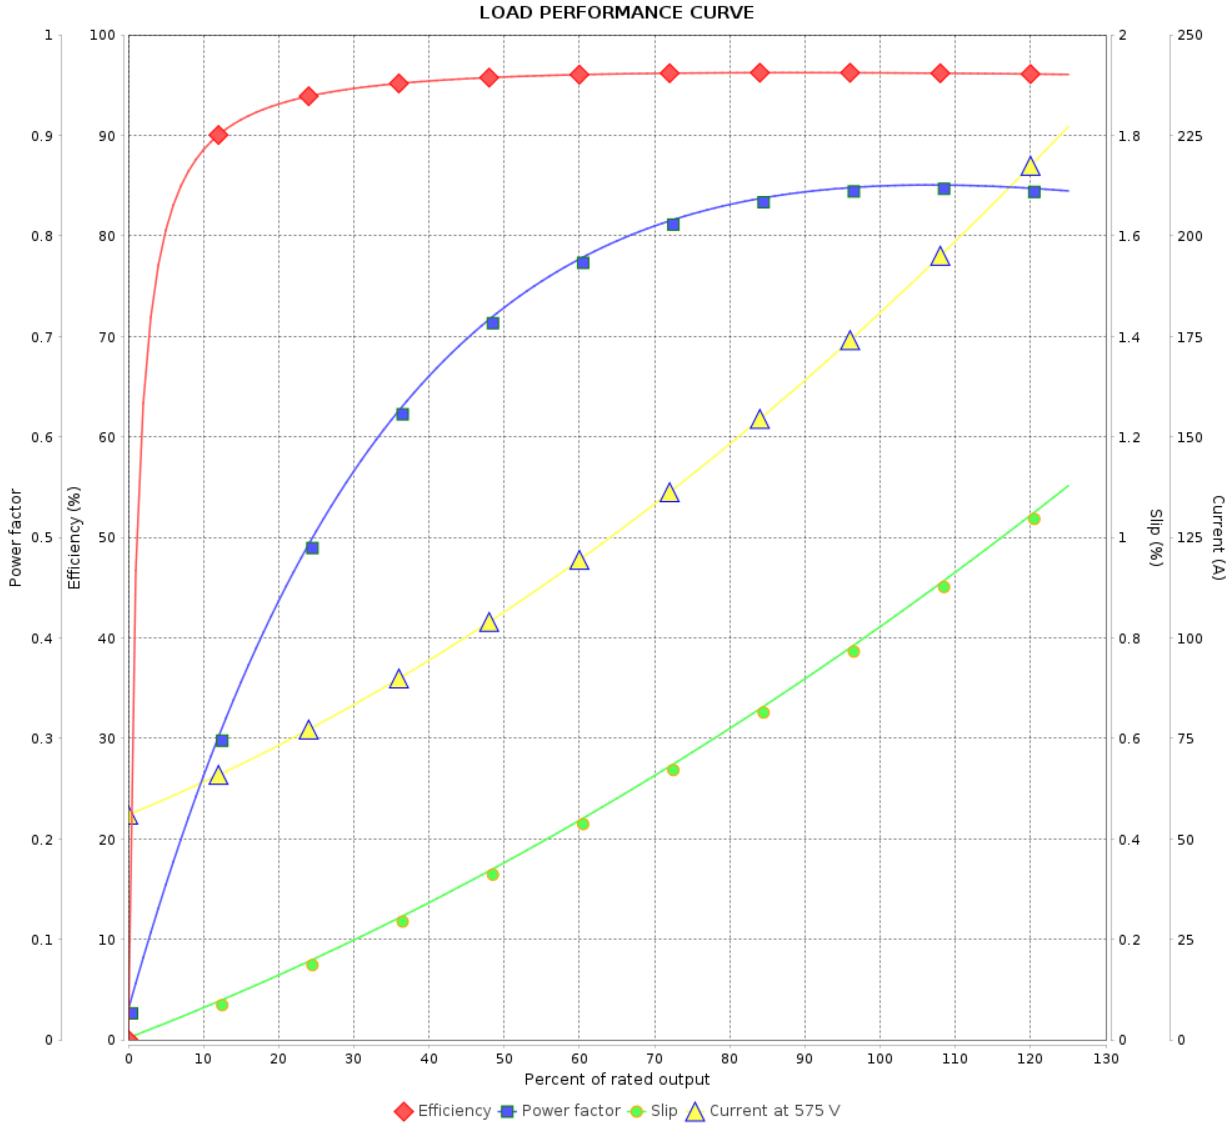

Performance : 575 V 60 Hz 4P

Rated current : 184 A
 LRC : 6.8
 Rated torque : 81.3 kgfm
 Locked rotor torque : 229 %
 Breakdown torque : 250 %
 Rated speed : 1785 rpm

Moment of inertia (J) : 3.21 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

| Rev. | Changes Summary | Performed | Checked | Date |
|--------------|-----------------|-----------|---------------|----------|
| | | | | |
| Performed by | | | Page 2 / 2 | Revision |
| Checked by | | | | |
| Date | 13/01/2024 | | | |