

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase Product code : 11432095

Frame	: 254/6T	Cooling method	: IC411 - TEFC
Insulation class	: F	Mounting	: F-1
Duty cycle	: Cont.(S1)	Rotation ¹	: Both (CW and CCW)
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line
Altitude	: 1000 m.a.s.l.	Approx. weight ³	: 140 kg
Protection degree	: IP56	Moment of inertia (J)	: 0.0647 kgm ²
Design	: B		

Output [HP]	20	15	15	15	20	20	20
Poles	2	2	2	2	2	2	2
Frequency [Hz]	60	50	50	50	50	50	50
Rated voltage [V]	460	380	400	415	380	400	415
Rated current [A]	23.3	20.8	20.0	19.5	28.6	27.2	26.0
L. R. Amperes [A]	142	146	154	158	146	155	159
LRC [A]	6.1x(Code G)	7.0x(Code H)	7.7x(Code J)	8.1x(Code J)	5.1x(Code E)	5.7x(Code F)	6.1x(Code G)
No load current [A]	6.50	6.20	6.60	6.90	6.20	6.60	6.90
Rated speed [RPM]	3520	2925	2935	2940	2870	2905	2915
Slip [%]	2.22	2.50	2.17	2.00	4.33	3.17	2.83
Rated torque [kgfm]	4.12	3.72	3.71	3.70	5.06	5.00	4.98
Locked rotor torque [%]	220	220	240	270	160	180	200
Breakdown torque [%]	250	260	280	310	200	210	229
Service factor	1.25	1.15	1.15	1.15	1.00	1.00	1.00
Temperature rise	80 K	80 K	80 K	80 K	105 K	105 K	105 K
Locked rotor time	34s (cold) 19s (hot)	28s (cold) 16s (hot)	28s (cold) 16s (hot)	28s (cold) 16s (hot)	14s (cold) 8s (hot)	18s (cold) 10s (hot)	21s (cold) 12s (hot)
Noise level ²	72.0 dB(A)	67.0 dB(A)	67.0 dB(A)	67.0 dB(A)	67.0 dB(A)	67.0 dB(A)	67.0 dB(A)
Efficiency (%)	25%						
	50%	91.0	90.6	90.4	89.8	91.0	91.0
	75%	91.7	90.9	91.2	91.1	90.2	91.0
	100%	91.0	91.2	91.2	91.2	88.5	89.5
Power Factor	25%						
	50%	0.80	0.78	0.75	0.73	0.85	0.83
	75%	0.87	0.86	0.85	0.83	0.89	0.88
	100%	0.89	0.88	0.87	0.86	0.90	0.89

Losses at normative operating points (speed;torque), in percentage of rated output power

Losses (%)	P1 (0,9;1,0)	9.0	8.8	8.8	8.8	11.9	10.7	9.9
	P2 (0,5;1,0)	7.0	6.8	6.8	6.8	9.2	8.3	7.7
	P3 (0,25;1,0)	6.8	6.6	6.6	6.6	8.9	8.1	7.5
	P4 (0,9;0,5)	4.6	4.5	4.5	4.5	6.0	5.4	5.0
	P5 (0,5;0,5)	2.6	2.5	2.5	2.5	3.4	3.1	2.8
	P6 (0,5;0,25)	1.6	1.5	1.5	1.5	2.1	1.9	1.7
	P7 (0,25;0,25)	0.9	0.9	0.9	0.9	1.2	1.1	1.0

Bearing type	Drive end	6309 C3	Non drive end	6209 C3	Foundation loads Max. traction : 110 kgf Max. compression : 250 kgf
	Sealing	Inpro/Seal	Inpro/Seal		
	Lubrication interval	19000 h	20000 h		
	Lubricant amount	13 g	9 g		
	Lubricant type	Mobil Polyrex EM			

This revision replaces and cancel the previous one, which must be eliminated.

(1) Looking the motor from the shaft end.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary			Performed	Checked	Date
Performed by						
Checked by					Page	Revision
Date	13/01/2024				1 / 9	

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Notes

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	13/01/2024		2 / 9	

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase

Product code : 11432095

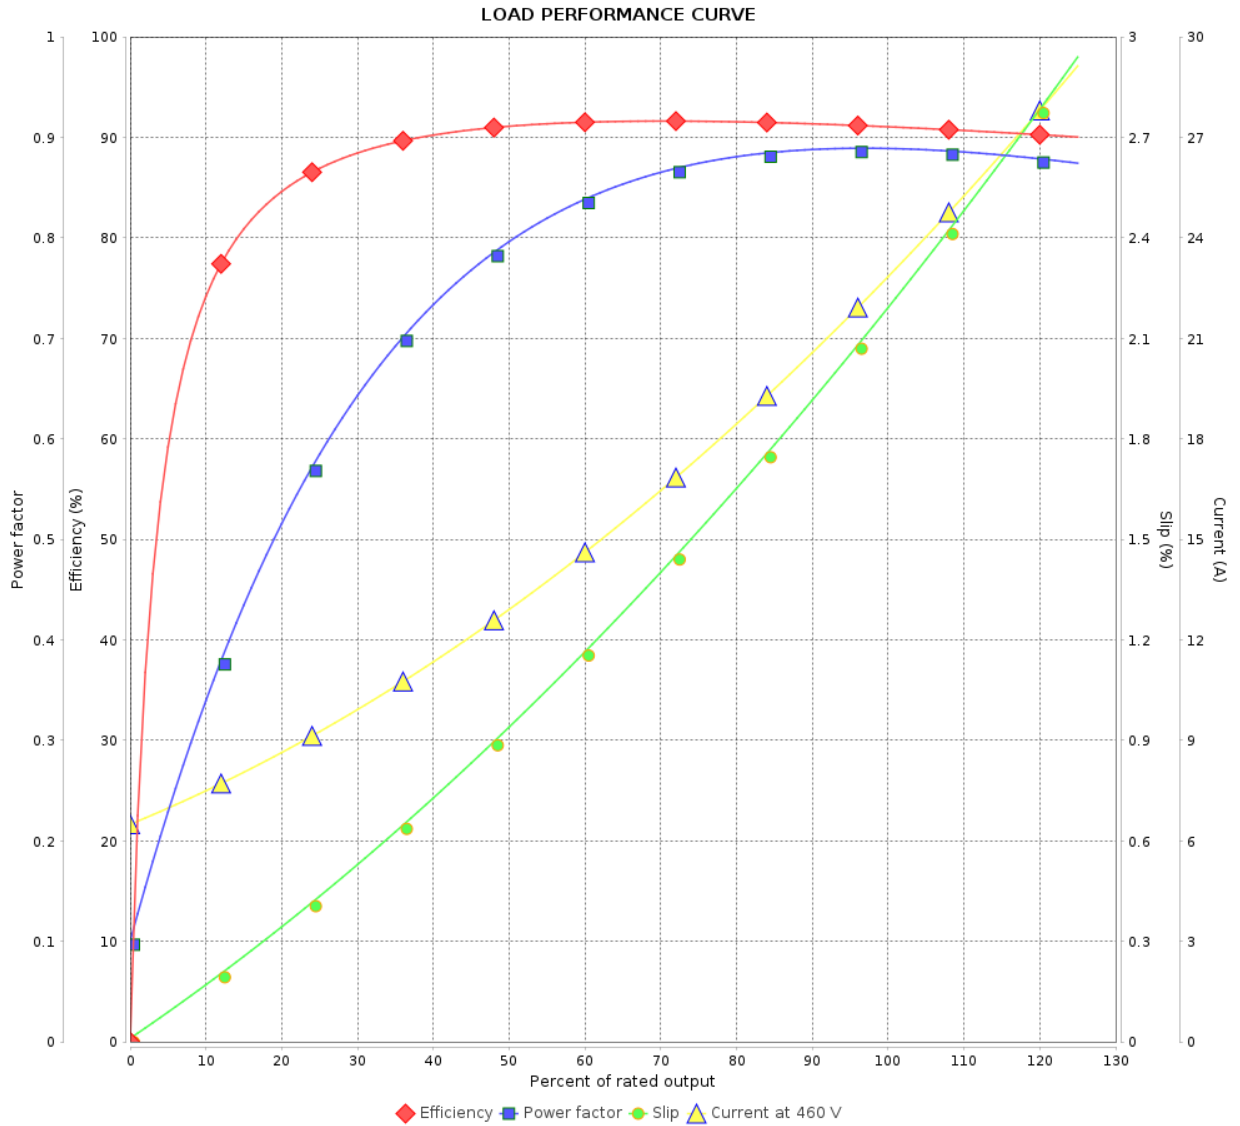

Performance : 460 V 60 Hz 2P

Rated current : 23.3 A
 LRC : 6.1
 Rated torque : 4.12 kgfm
 Locked rotor torque : 220 %
 Breakdown torque : 250 %
 Rated speed : 3520 rpm

Moment of inertia (J) : 0.0647 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.25
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase Product code : 11432095

LOAD PERFORMANCE CURVE

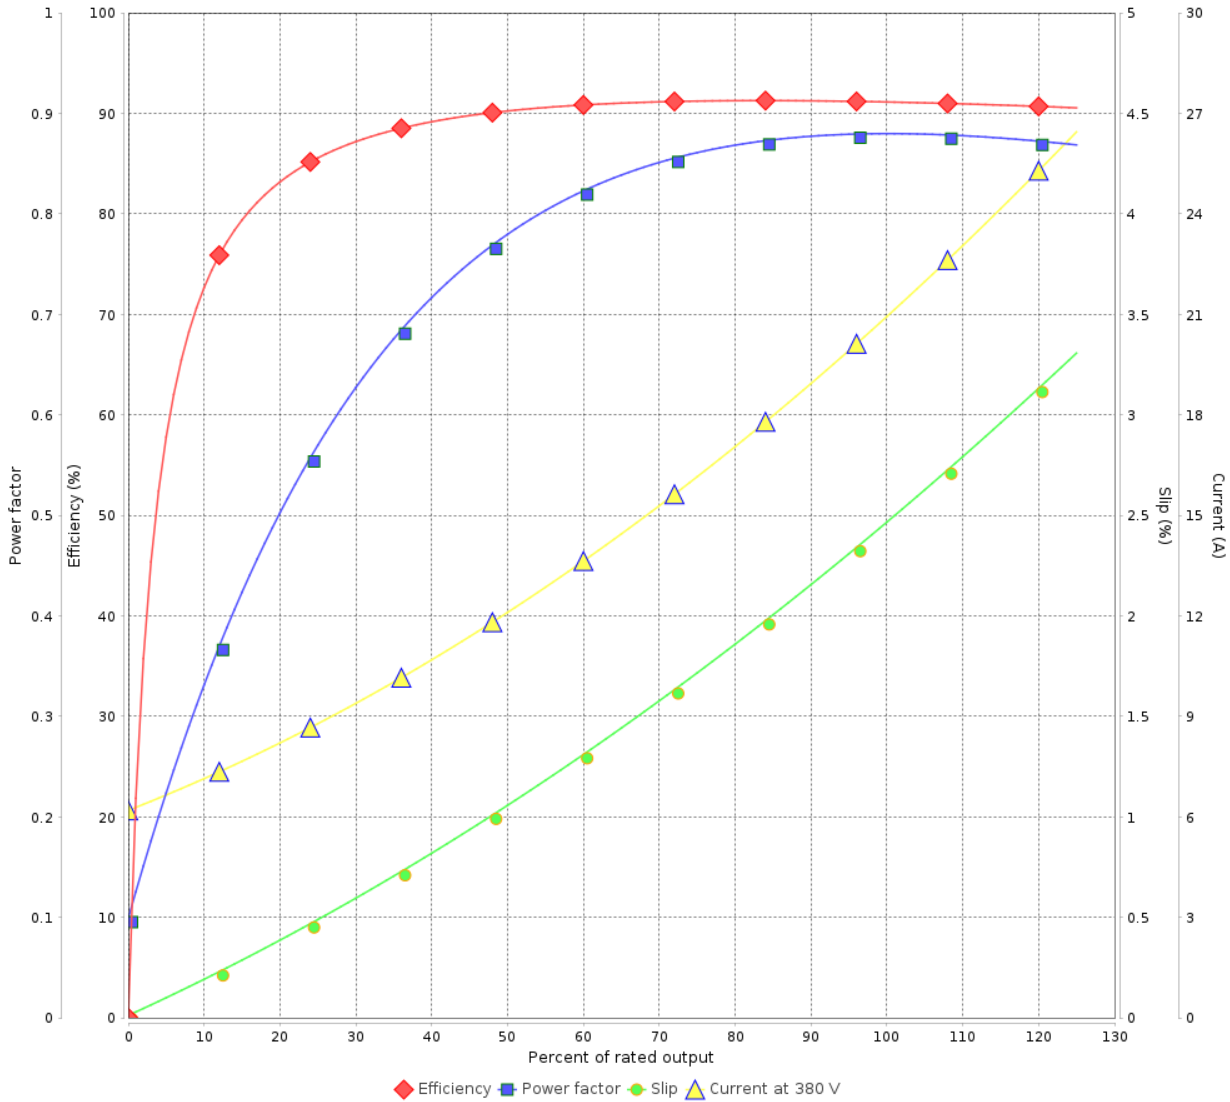

Performance : 380 V 50 Hz 2P IE3

Rated current	: 20.8 A	Moment of inertia (J)	: 0.0647 kgm ²
LRC	: 7.0	Duty cycle	: Cont.(S1)
Rated torque	: 3.72 kgfm	Insulation class	: F
Locked rotor torque	: 220 %	Service factor	: 1.15
Breakdown torque	: 260 %	Temperature rise	: 80 K
Rated speed	: 2925 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		4 / 9		
Date	13/01/2024			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase

Product code : 11432095

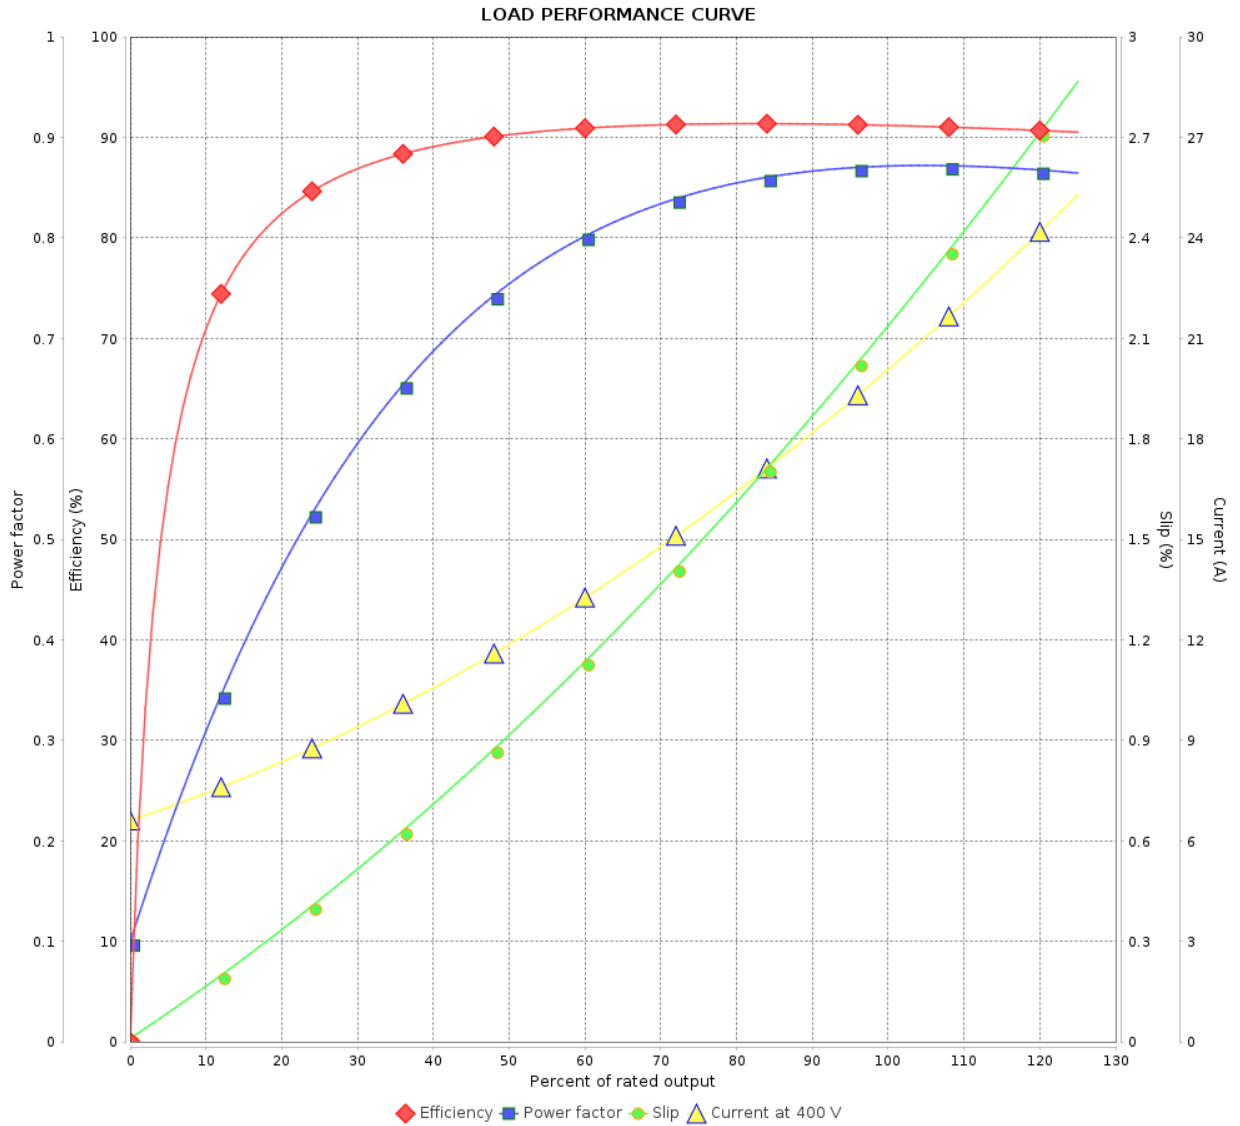

Performance : 400 V 50 Hz 2P IE3

Rated current : 20.0 A
 LRC : 7.7
 Rated torque : 3.71 kgfm
 Locked rotor torque : 240 %
 Breakdown torque : 280 %
 Rated speed : 2935 rpm

Moment of inertia (J) : 0.0647 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		5 / 9		
Date		13/01/2024		


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase Product code : 11432095

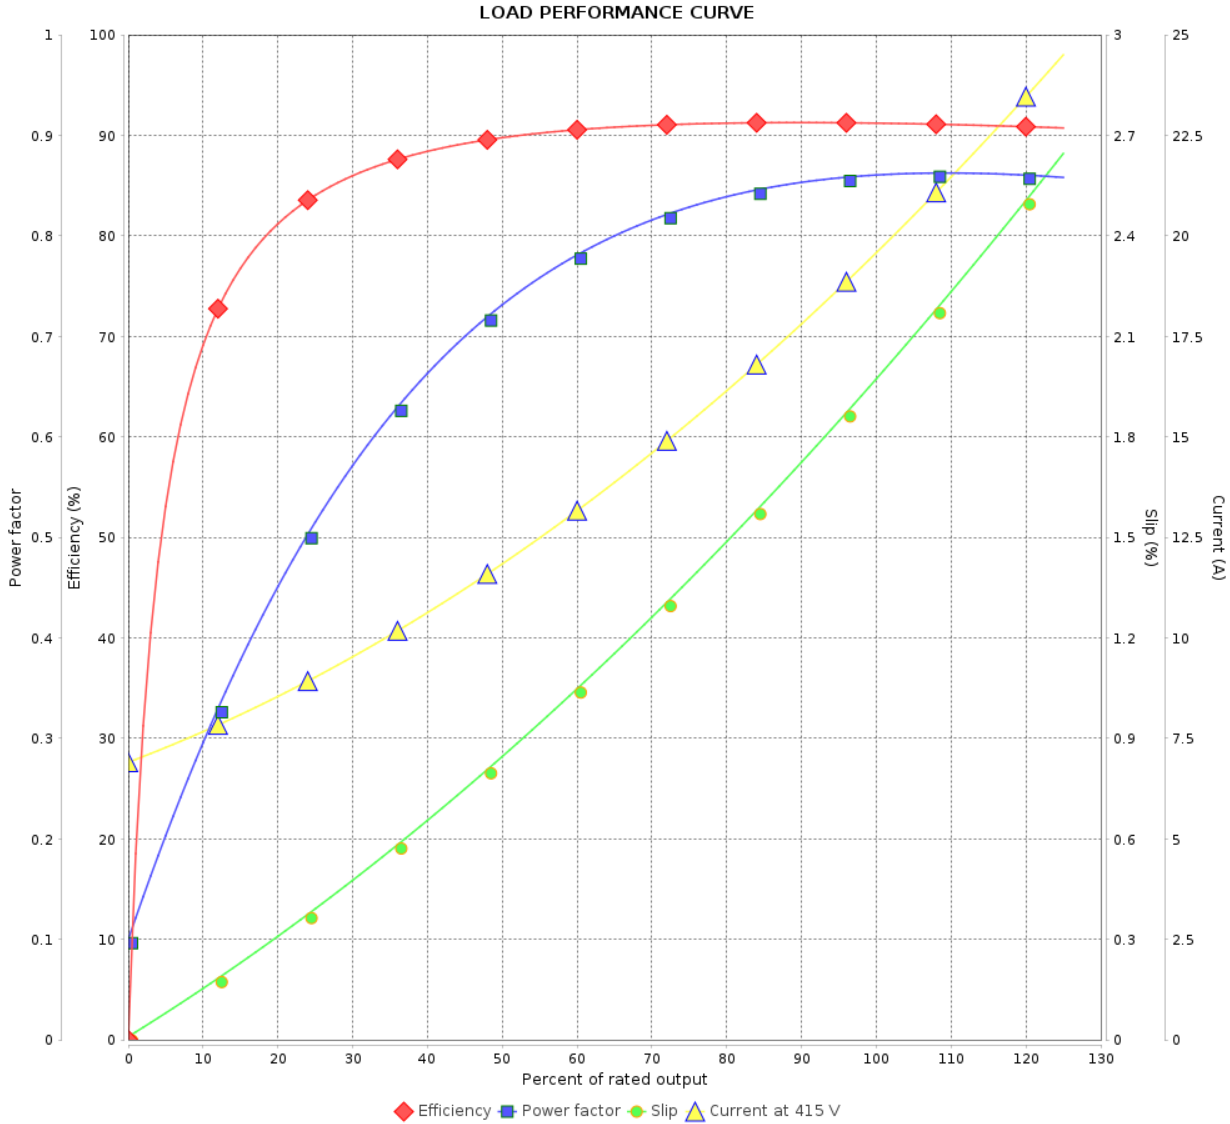

Performance : 415 V 50 Hz 2P IE3

Rated current	: 19.5 A	Moment of inertia (J)	: 0.0647 kgm ²
LRC	: 8.1	Duty cycle	: Cont.(S1)
Rated torque	: 3.70 kgfm	Insulation class	: F
Locked rotor torque	: 270 %	Service factor	: 1.15
Breakdown torque	: 310 %	Temperature rise	: 80 K
Rated speed	: 2940 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 6 / 9	Revision
Checked by				
Date	13/01/2024			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase

Product code : 11432095

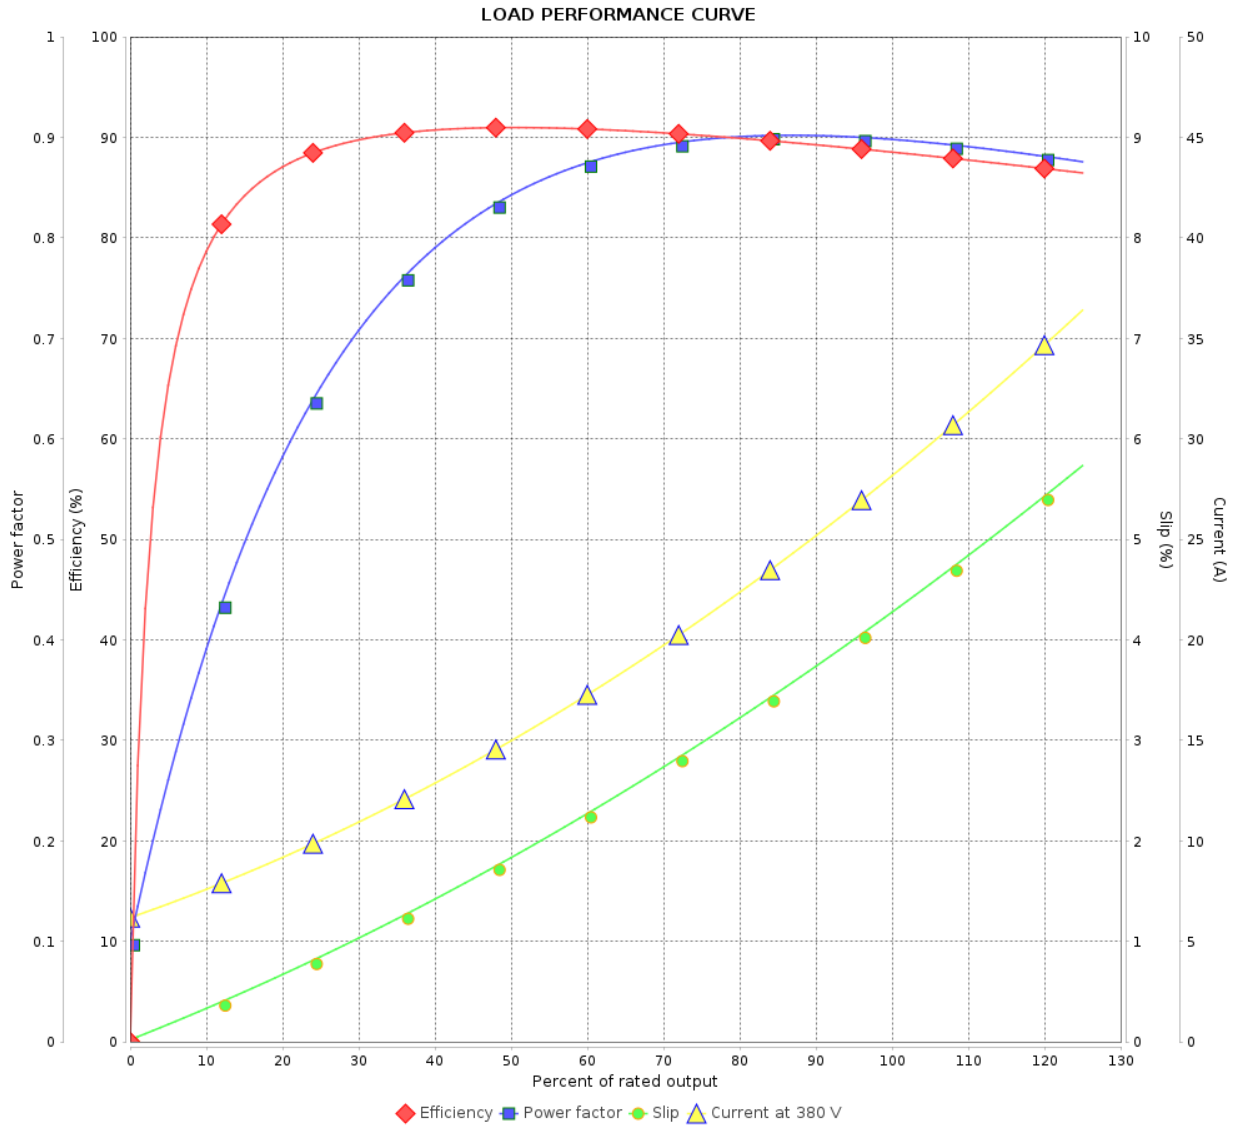

Performance : 380 V 50 Hz 2P

Rated current : 28.6 A
 LRC : 5.1
 Rated torque : 5.06 kgfm
 Locked rotor torque : 160 %
 Breakdown torque : 200 %
 Rated speed : 2870 rpm

Moment of inertia (J) : 0.0647 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 105 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase Product code : 11432095

LOAD PERFORMANCE CURVE

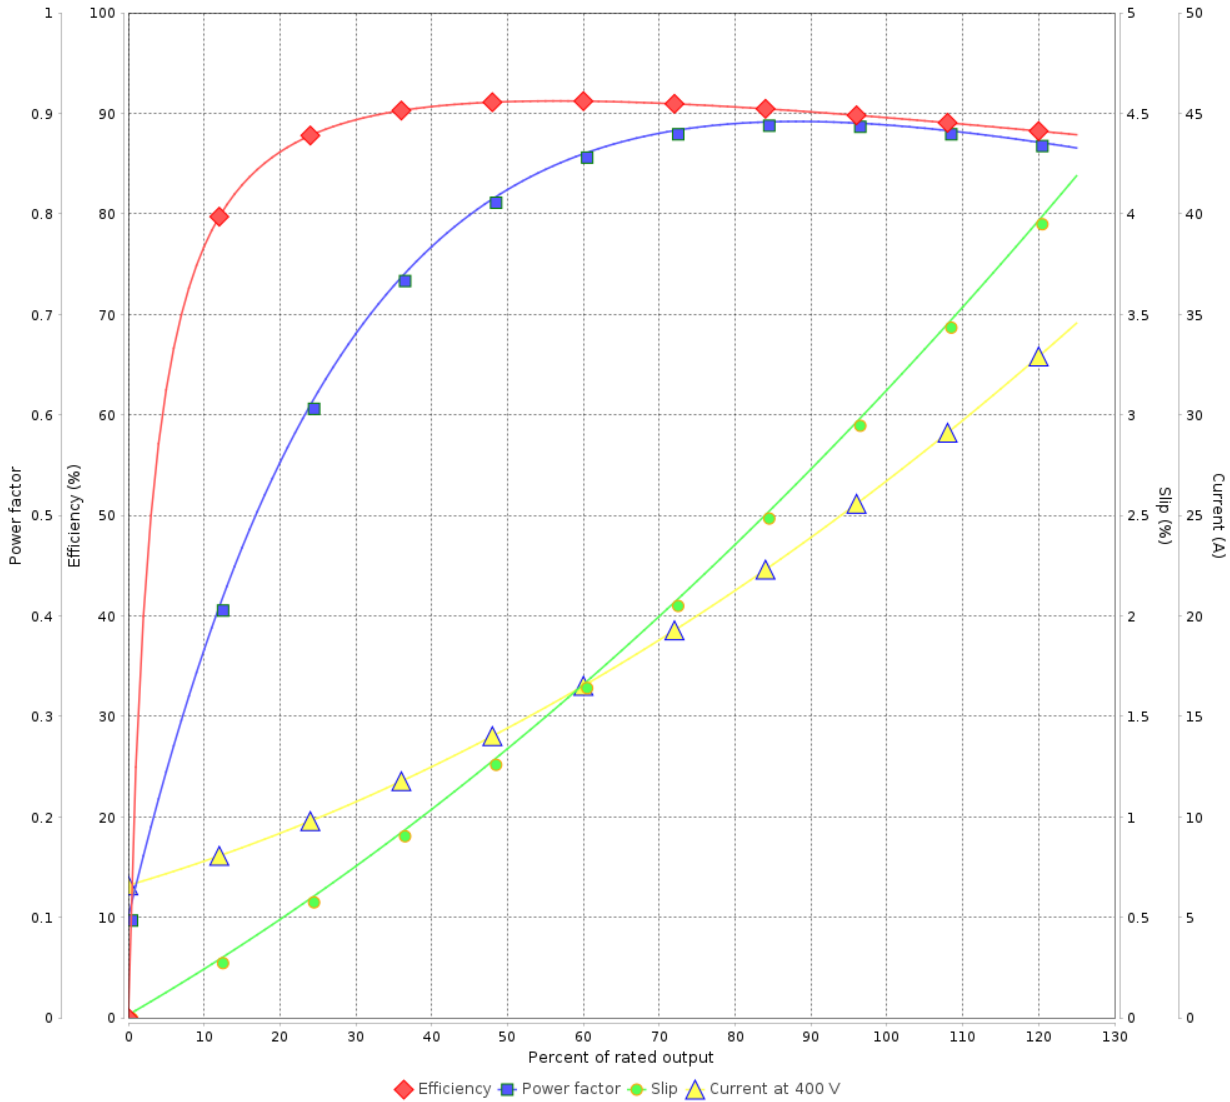

Performance : 400 V 50 Hz 2P IE1

Rated current	: 27.2 A	Moment of inertia (J)	: 0.0647 kgm ²
LRC	: 5.7	Duty cycle	: Cont.(S1)
Rated torque	: 5.00 kgfm	Insulation class	: F
Locked rotor torque	: 180 %	Service factor	: 1.00
Breakdown torque	: 210 %	Temperature rise	: 105 K
Rated speed	: 2905 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 8 / 9	Revision
Checked by				
Date	13/01/2024			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 IEEE 841 NEMA Premium Efficiency
Three-Phase

Product code : 11432095

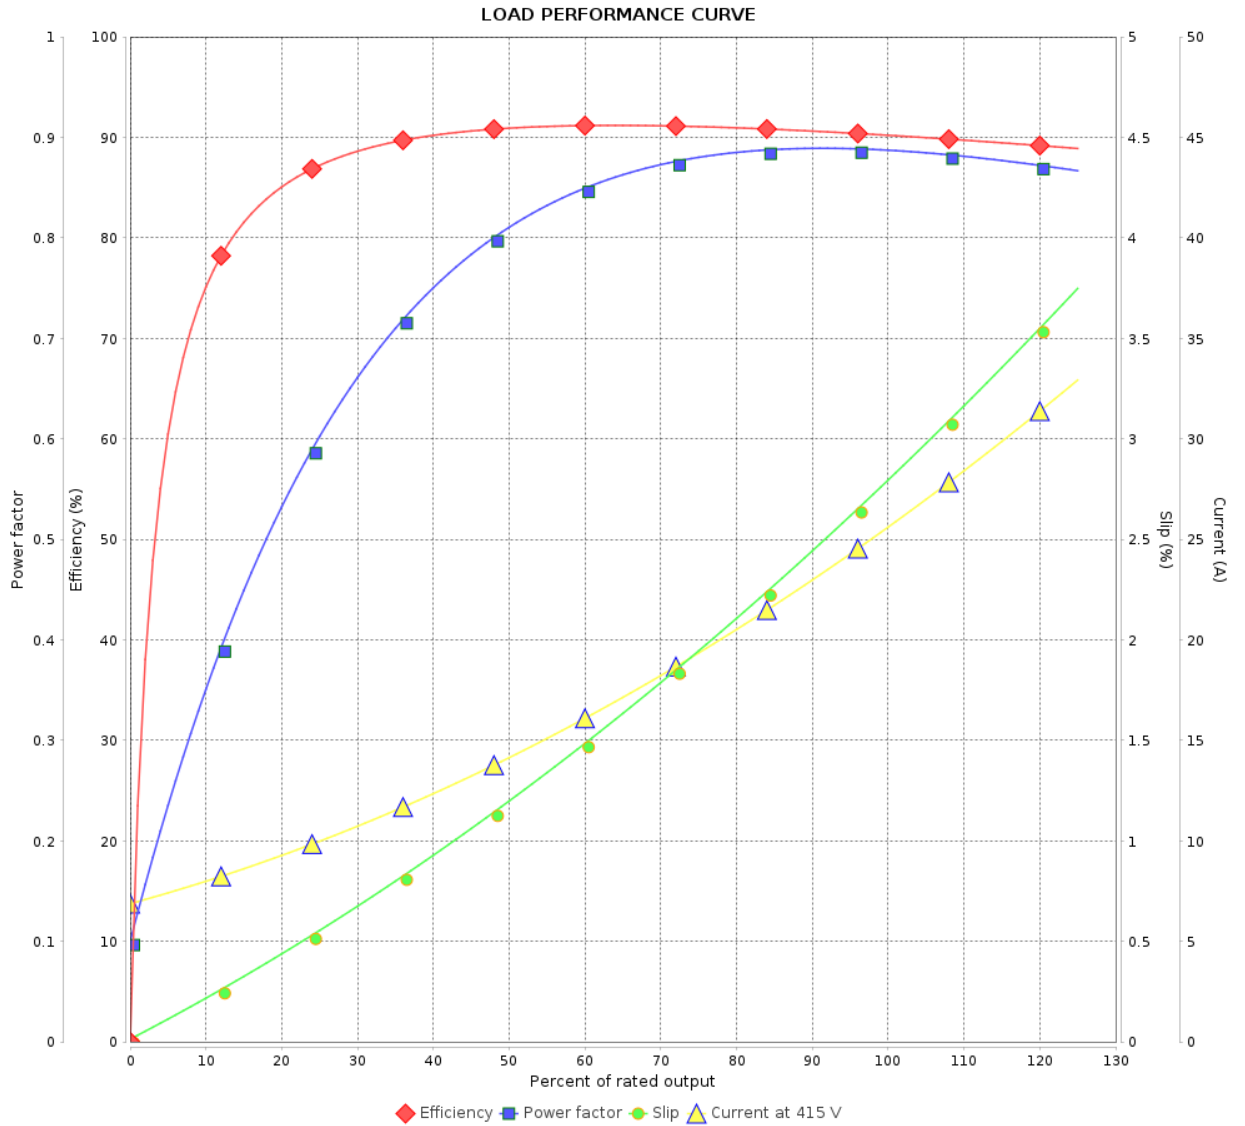

Performance : 415 V 50 Hz 2P IE1

Rated current : 26.0 A
 LRC : 6.1
 Rated torque : 4.98 kgfm
 Locked rotor torque : 200 %
 Breakdown torque : 229 %
 Rated speed : 2915 rpm

Moment of inertia (J) : 0.0647 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 105 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		9 / 9		
Date		13/01/2024		