

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 NEMA Premium Efficiency Three-Phase
Product code : 11611479

Frame : 213/5T	Cooling method : IC411 - TEFC
Insulation class : F	Mounting : F-1
Duty cycle : Cont.(S1)	Rotation ¹ : Both (CW and CCW)
Ambient temperature : -20°C to +40°C	Starting method : Direct On Line
Altitude : 1000 m.a.s.l.	Approx. weight ³ : 80.2 kg
Protection degree : IP55	Moment of inertia (J) : 0.0636 kgm ²
Design : B	

Output [HP]	10	7.5	7.5	7.5	10	10	10
Poles	4	4	4	4	4	4	4
Frequency [Hz]	60	50	50	50	50	50	50
Rated voltage [V]	230/460	380	400	415	380	400	415
Rated current [A]	25.3/12.7	11.5	11.4	11.3	15.2	14.4	14.1
L. R. Amperes [A]	162/81.1	86.2	91.5	96.1	90.9	93.6	98.8
LRC [A]	6.4x(Code H)	7.5x(Code J)	8.0x(Code K)	8.5x(Code L)	6.0x(Code G)	6.5x(Code H)	7.0x(Code H)
No load current [A]	11.3/5.65	5.60	6.00	6.35	5.60	6.00	6.35
Rated speed [RPM]	1765	1465	1470	1470	1450	1455	1460
Slip [%]	1.94	2.33	2.00	2.00	3.33	3.00	2.67
Rated torque [kgfm]	4.11	3.72	3.70	3.70	5.01	4.99	4.97
Locked rotor torque [%]	200	200	240	260	150	180	190
Breakdown torque [%]	295	300	340	360	220	250	270
Service factor	1.25	1.15	1.15	1.15	1.15	1.15	1.15
Temperature rise	80 K	80 K	80 K	80 K	80 K	80 K	80 K
Locked rotor time	30s (cold) 17s (hot)	25s (cold) 14s (hot)	25s (cold) 14s (hot)	25s (cold) 14s (hot)	25s (cold) 14s (hot)	25s (cold) 14s (hot)	25s (cold) 14s (hot)
Noise level ²	58.0 dB(A)	56.0 dB(A)	56.0 dB(A)	56.0 dB(A)	56.0 dB(A)	56.0 dB(A)	56.0 dB(A)
Efficiency (%)	25%						
	50%	91.0	90.0	89.2	88.7	90.3	90.3
	75%	91.7	90.0	89.9	89.8	90.2	90.2
	100%	91.7	89.8	90.1	90.3	88.5	89.5
Power Factor	25%						
	50%	0.65	0.61	0.57	0.53	0.72	0.68
	75%	0.76	0.74	0.70	0.67	0.81	0.79
	100%	0.81	0.81	0.77	0.75	0.85	0.84

Losses at normative operating points (speed;torque), in percentage of rated output power

Losses (%)	P1 (0,9;1,0)	8.8	11.0	10.7	10.4	12.6	11.4	10.6
	P2 (0,5;1,0)	7.3	9.2	8.9	8.7	10.5	9.5	8.8
	P3 (0,25;1,0)	7.0	8.8	8.5	8.3	10.1	9.1	8.4
	P4 (0,9;0,5)	4.6	5.8	5.6	5.5	6.6	6.0	5.6
	P5 (0,5;0,5)	3.2	4.0	3.9	3.8	4.6	4.1	3.8
	P6 (0,5;0,25)	2.3	2.8	2.7	2.7	3.2	2.9	2.7
	P7 (0,25;0,25)	1.6	2.0	1.9	1.9	2.2	2.0	1.9

Bearing type : Sealing : Lubrication interval : Lubricant amount : Lubricant type :	Drive end	Non drive end	Foundation loads Max. traction : 208 kgf Max. compression : 288 kgf
	6308 ZZ	6207 ZZ	
	V'Ring	V'Ring	
	-	-	
	-	-	
	Mobil Polyrex EM		

This revision replaces and cancel the previous one, which must be eliminated.

(1) Looking the motor from the shaft end.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	01/02/2024		1 / 9	

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Notes
USABLE @208V 27.4A SF 1.15 SFA 31.5A

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	01/02/2024		2 / 9	

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11611479

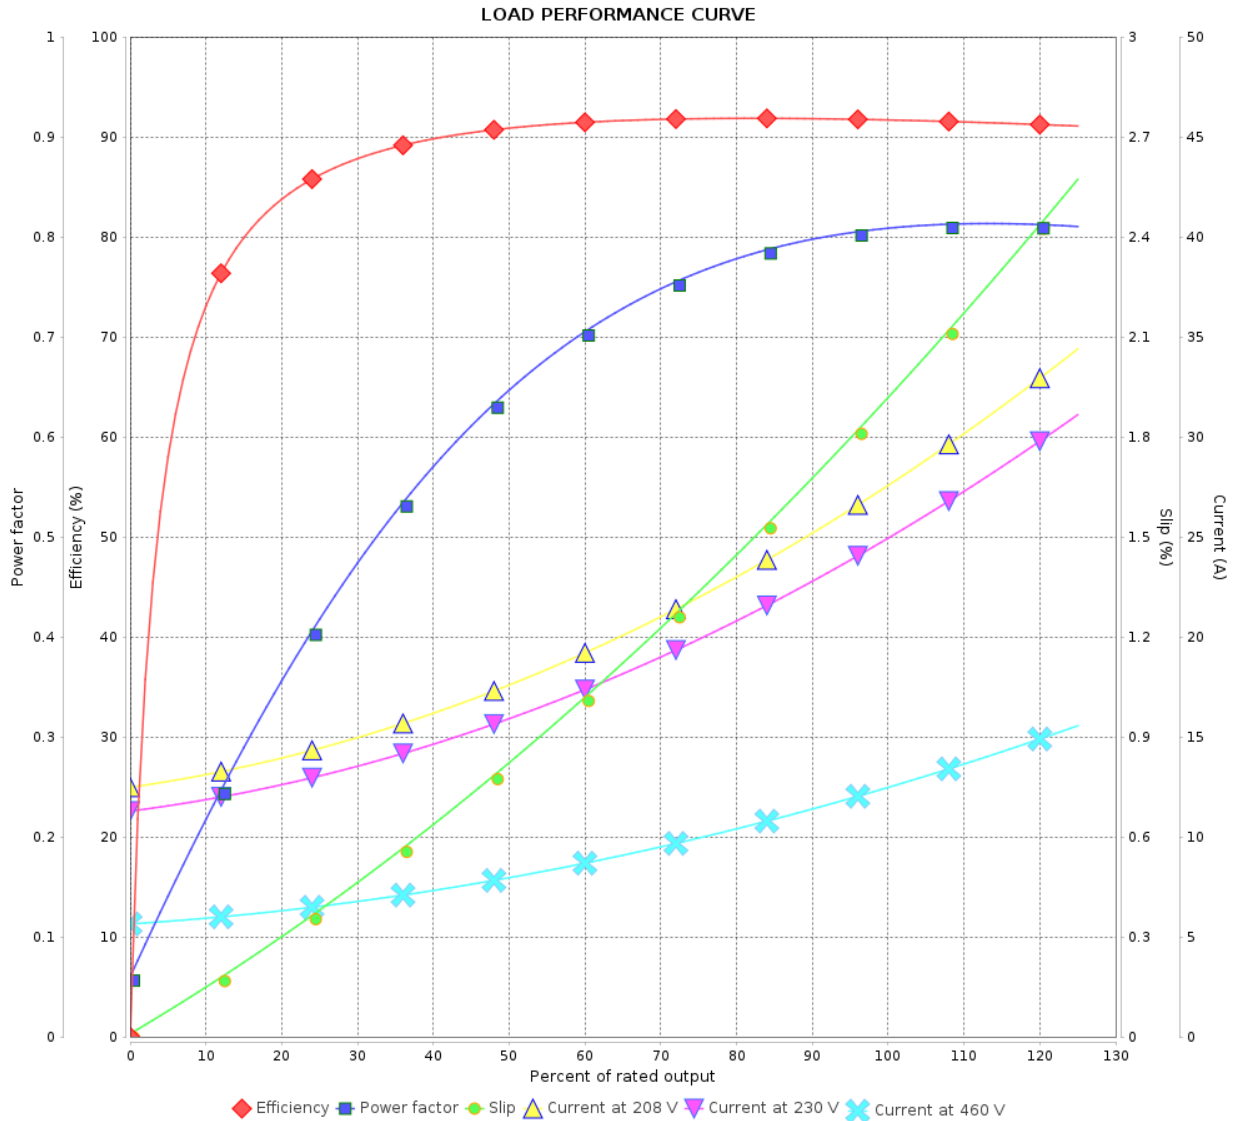

Performance : 230/460 V 60 Hz 4P

Rated current : 25.3/12.7 A
 LRC : 6.4
 Rated torque : 4.11 kgfm
 Locked rotor torque : 200 %
 Breakdown torque : 295 %
 Rated speed : 1765 rpm

Moment of inertia (J) : 0.0636 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.25
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11611479

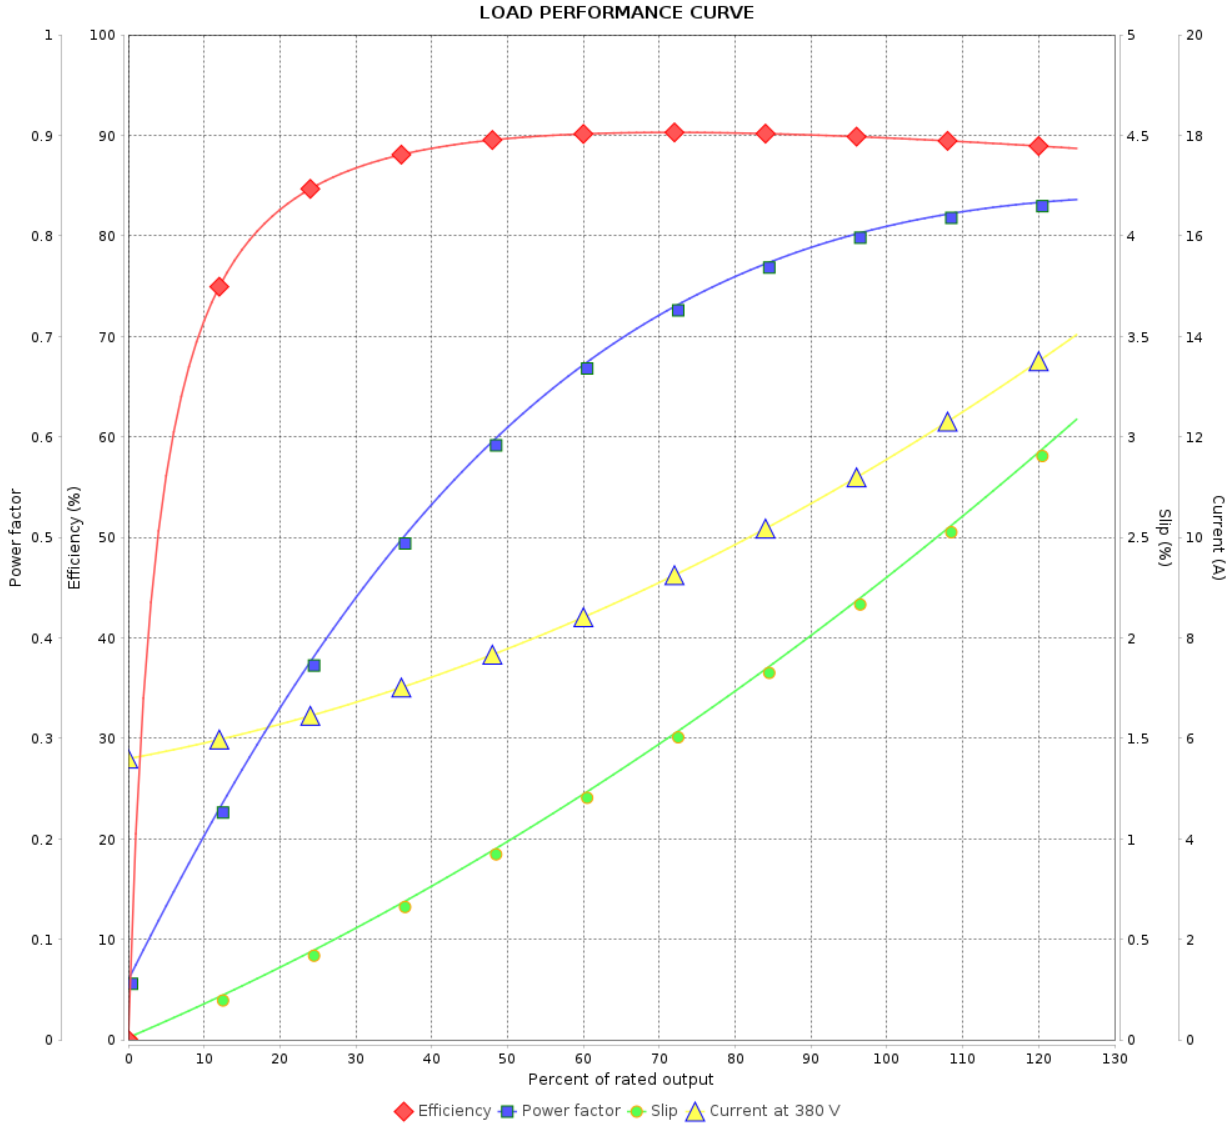

Performance : 380 V 50 Hz 4P IE3

Rated current : 11.5 A
 LRC : 7.5
 Rated torque : 3.72 kgfm
 Locked rotor torque : 200 %
 Breakdown torque : 300 %
 Rated speed : 1465 rpm

Moment of inertia (J) : 0.0636 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 4 / 9	Revision
Checked by				
Date	01/02/2024			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11611479

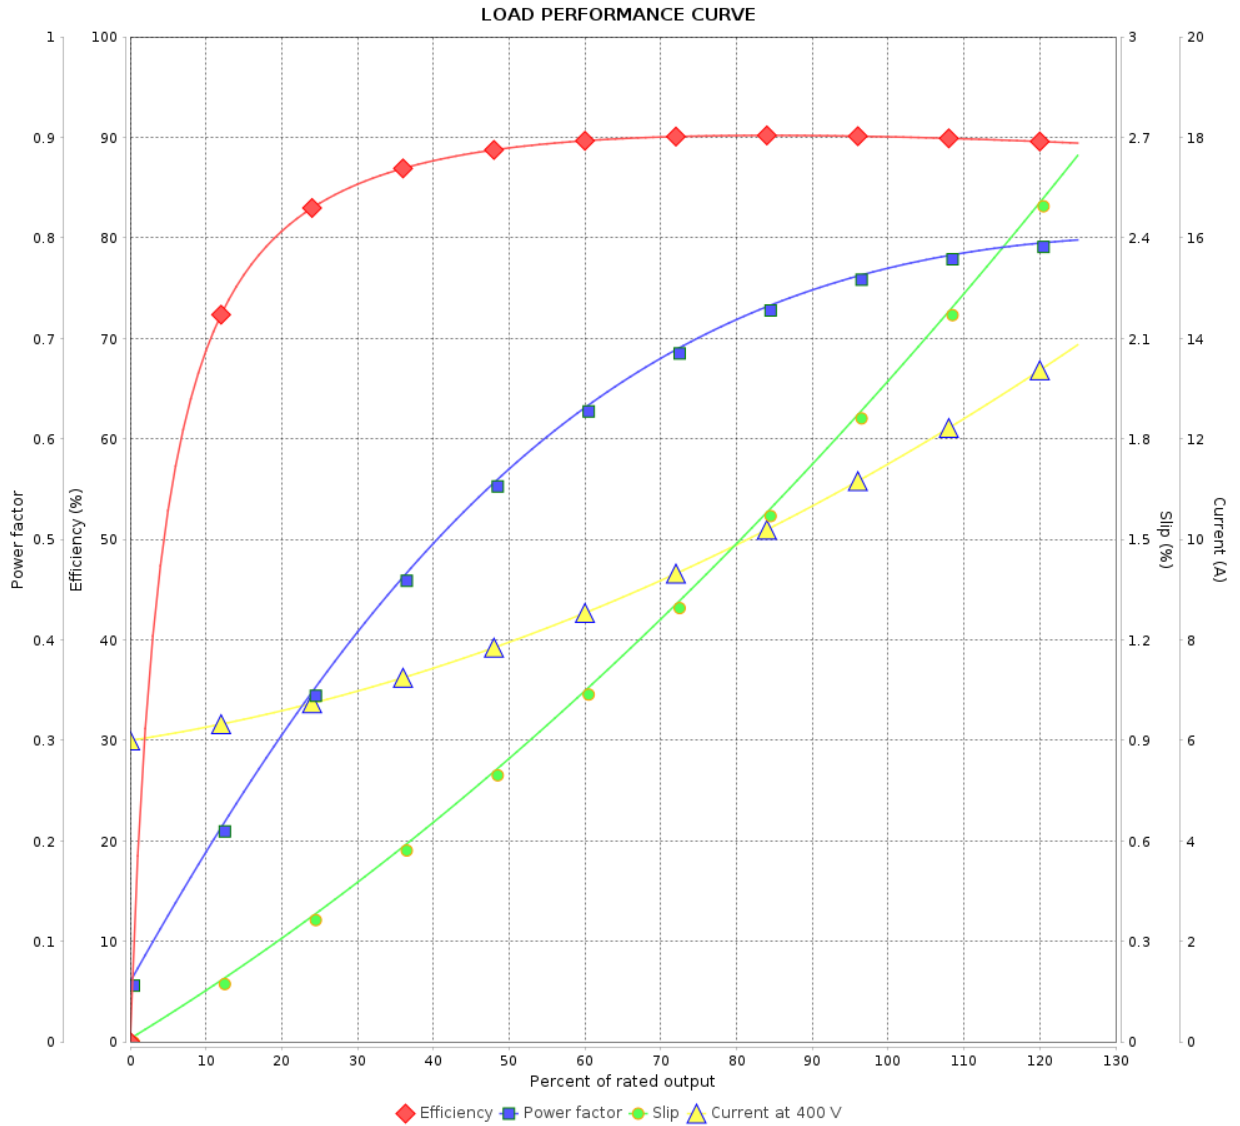

Performance : 400 V 50 Hz 4P IE3

Rated current : 11.4 A
 LRC : 8.0
 Rated torque : 3.70 kgfm
 Locked rotor torque : 240 %
 Breakdown torque : 340 %
 Rated speed : 1470 rpm

Moment of inertia (J) : 0.0636 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11611479

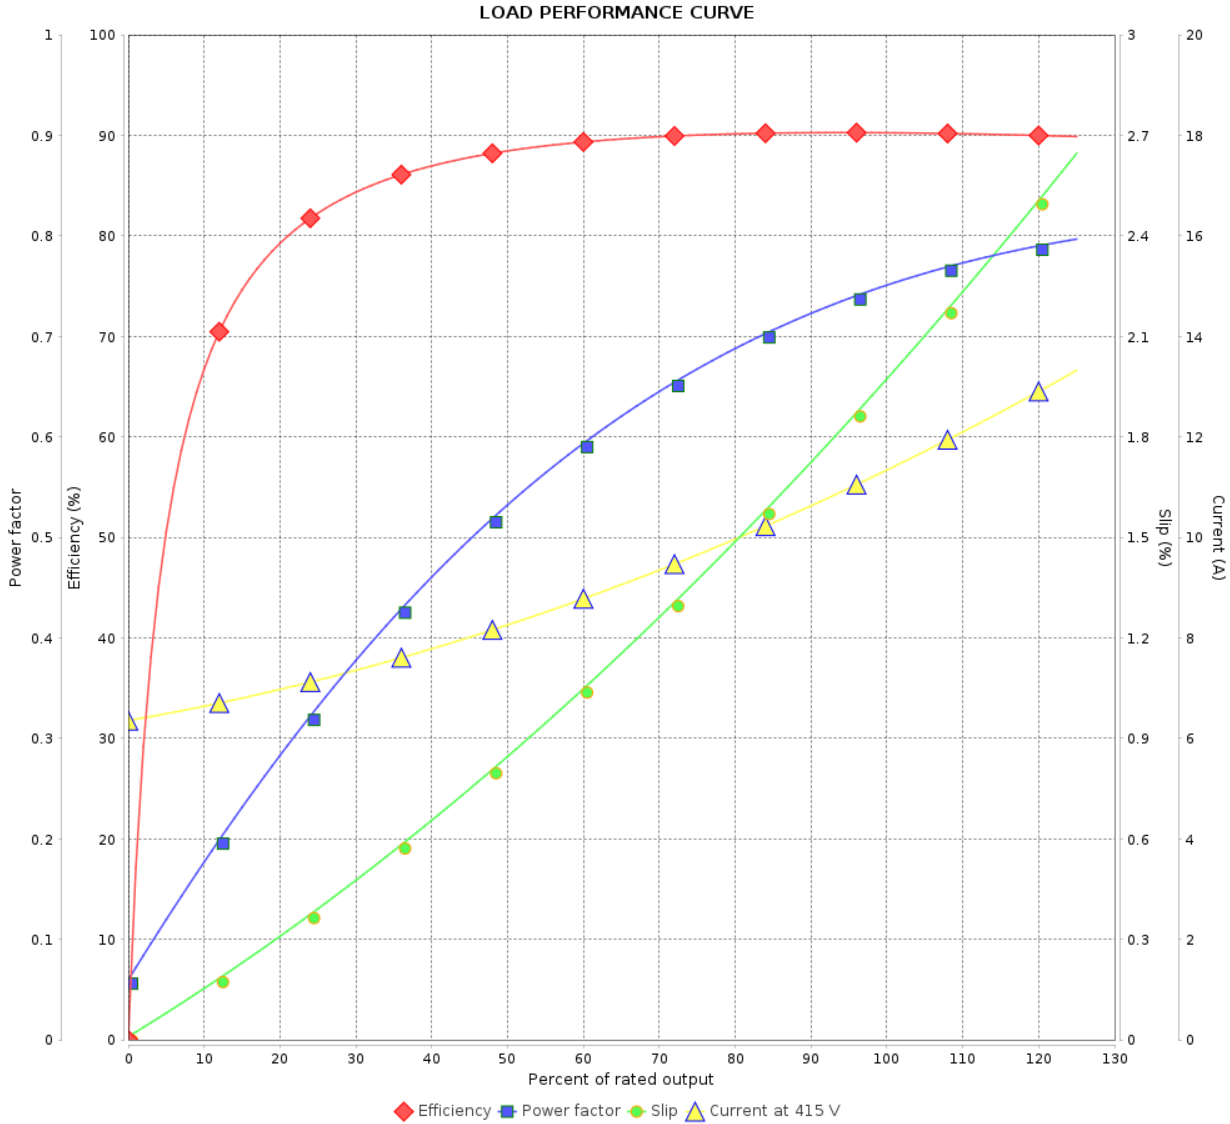

Performance : 415 V 50 Hz 4P IE3

Rated current : 11.3 A
 LRC : 8.5
 Rated torque : 3.70 kgfm
 Locked rotor torque : 260 %
 Breakdown torque : 360 %
 Rated speed : 1470 rpm

Moment of inertia (J) : 0.0636 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 6 / 9	Revision
Checked by				
Date	01/02/2024			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11611479

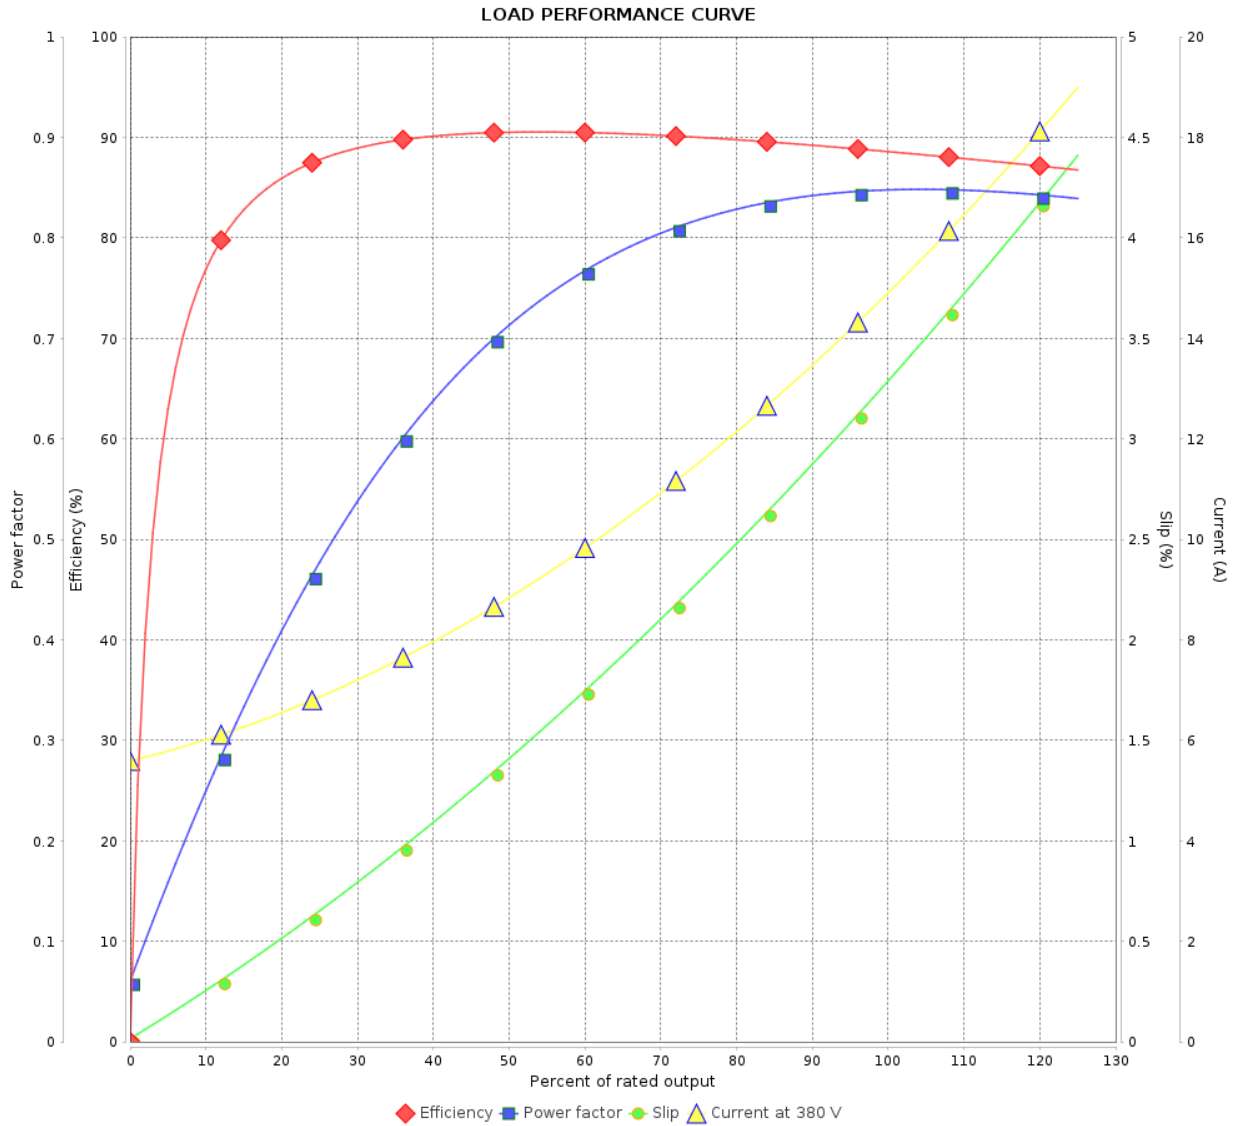

Performance : 380 V 50 Hz 4P IE1

Rated current : 15.2 A
 LRC : 6.0
 Rated torque : 5.01 kgfm
 Locked rotor torque : 150 %
 Breakdown torque : 220 %
 Rated speed : 1450 rpm

Moment of inertia (J) : 0.0636 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by				
Date				
		Page	Revision	
		7 / 9		

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11611479

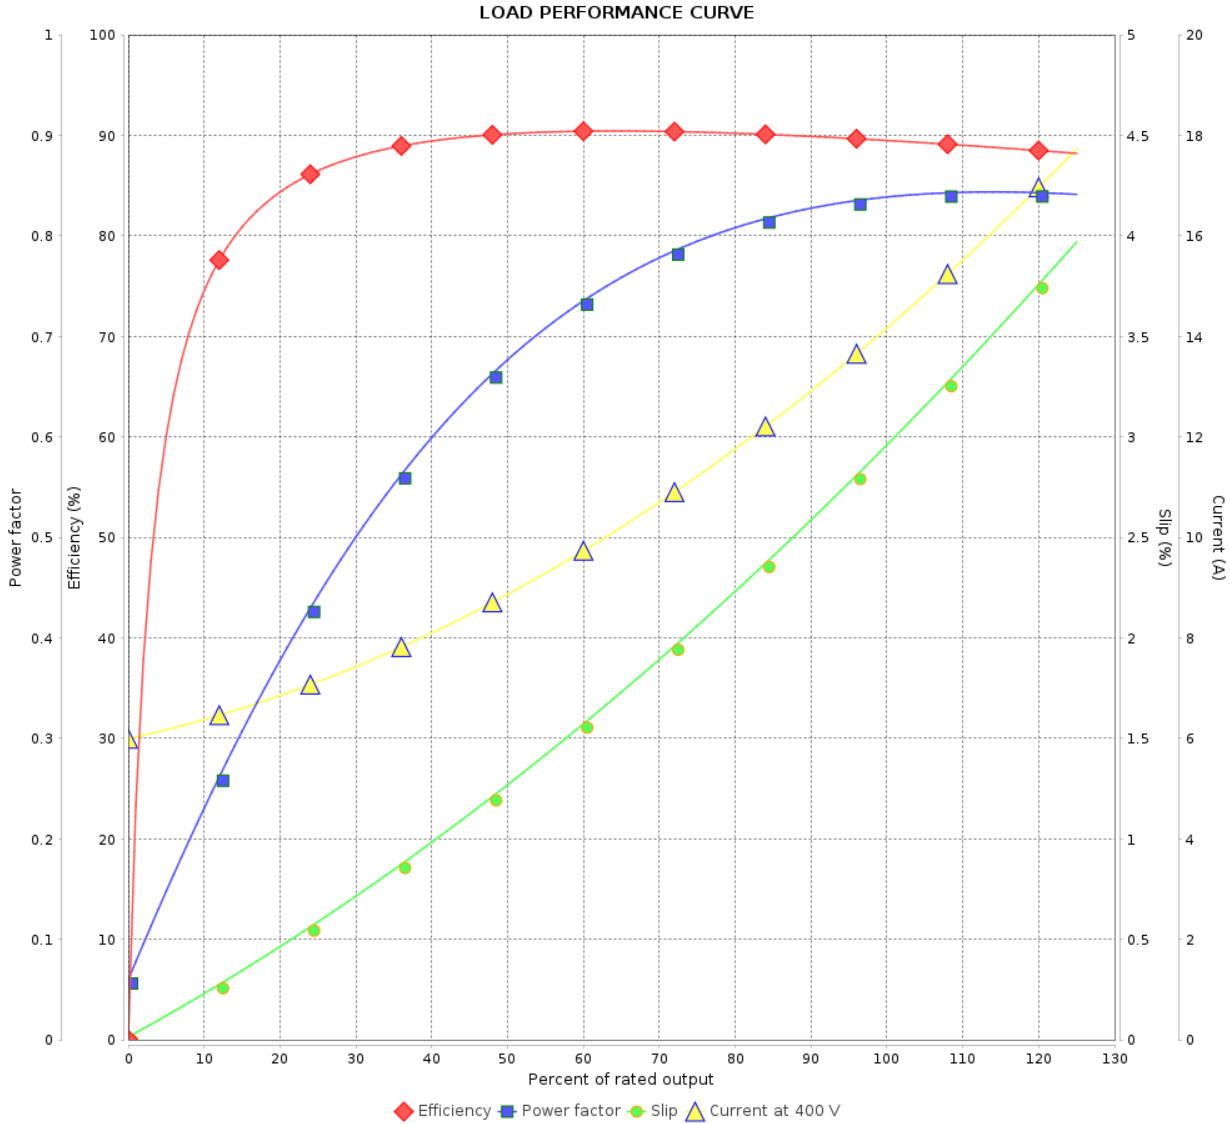

Performance : 400 V 50 Hz 4P IE2

Rated current : 14.4 A
 LRC : 6.5
 Rated torque : 4.99 kgfm
 Locked rotor torque : 180 %
 Breakdown torque : 250 %
 Rated speed : 1455 rpm

Moment of inertia (J) : 0.0636 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11611479

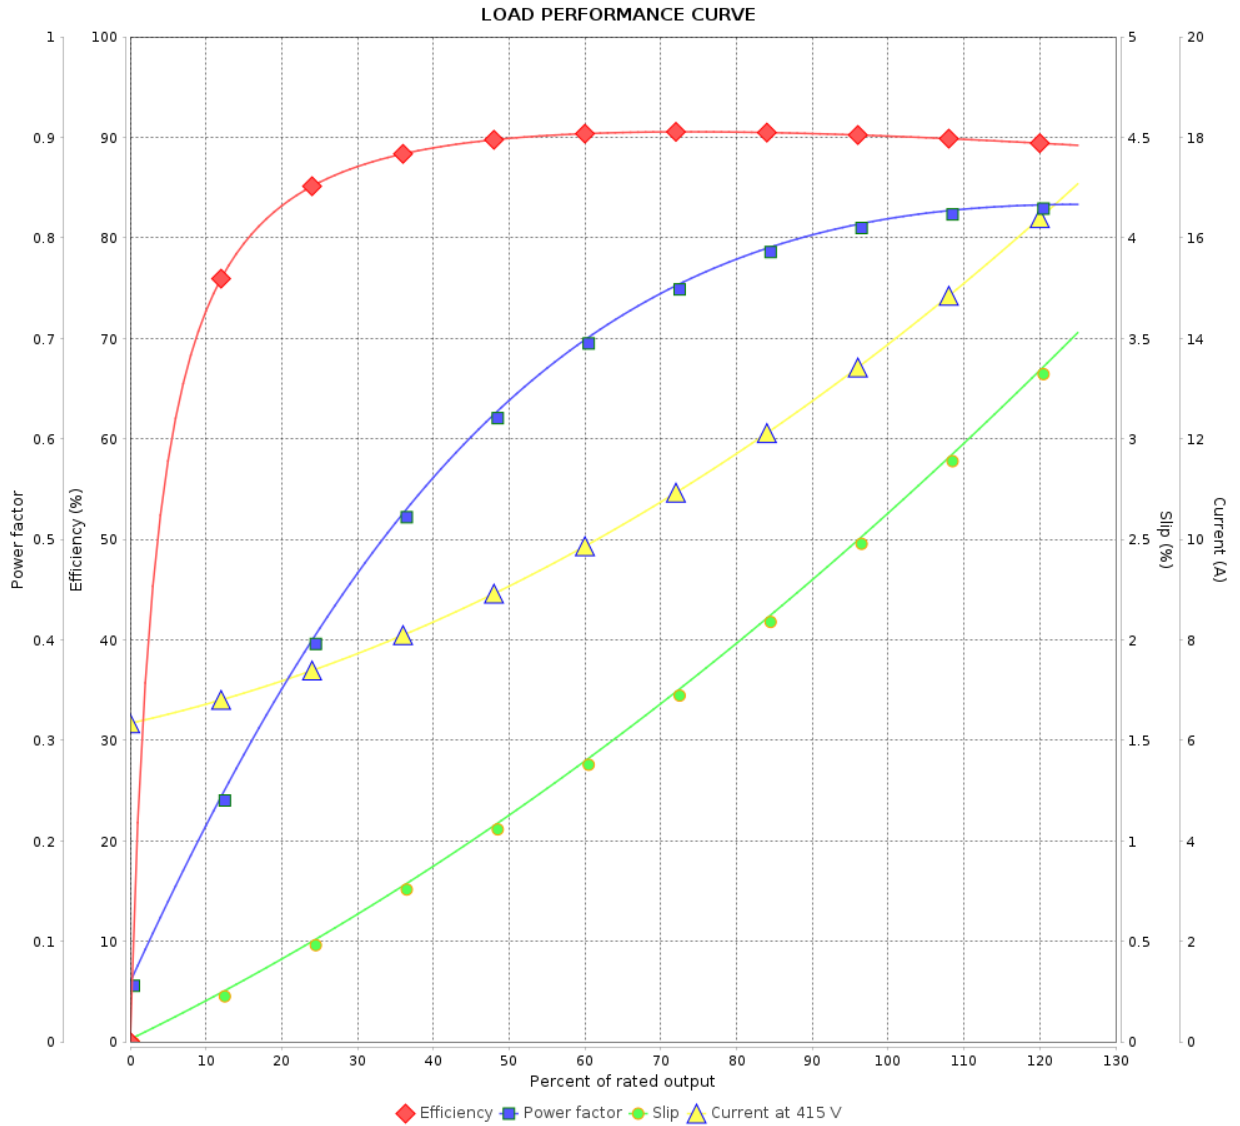

Performance : 415 V 50 Hz 4P IE2

Rated current : 14.1 A
 LRC : 7.0
 Rated torque : 4.97 kgfm
 Locked rotor torque : 190 %
 Breakdown torque : 270 %
 Rated speed : 1460 rpm

Moment of inertia (J) : 0.0636 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				