

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :							
Product line	: W22 NEMA Premium Efficiency Three-Phase	Product code :	11626903				
Frame	: 445/7T	Cooling method	: IC411 - TEFC				
Insulation class	: F	Mounting	: F-1				
Duty cycle	: Cont.(S1)	Rotation ¹	: Both (CW and CCW)				
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line				
Altitude	: 1000 m.a.s.l.	Approx. weight ³	: 1004 kg				
Protection degree	: IP55	Moment of inertia (J)	: 5.63 kgm ²				
Design	: B						
Output [HP]	150	125	125	125	150	150	150
Poles	6	6	6	6	6	6	6
Frequency [Hz]	60	50	50	50	50	50	50
Rated voltage [V]	230/460	380	400	415	380	400	415
Rated current [A]	352/176	174	167	165	211	201	196
L. R. Amperes [A]	2179/1090	1042	1083	1152	1053	1107	1179
LRC [A]	6.2x(Code G)	6.0x(Code F)	6.5x(Code G)	7.0x(Code H)	5.0x(Code E)	5.5x(Code F)	6.0x(Code G)
No load current [A]	136/68.0	67.0	72.0	78.0	67.0	74.0	78.0
Rated speed [RPM]	1189	989	990	990	984	985	986
Slip [%]	0.92	1.10	1.00	1.00	1.60	1.50	1.40
Rated torque [kgfm]	91.6	91.7	91.6	91.6	111	111	110
Locked rotor torque [%]	240	229	260	280	190	200	220
Breakdown torque [%]	250	240	270	290	200	229	250
Service factor	1.15	1.00	1.00	1.00	1.00	1.00	1.00
Temperature rise	80 K	80 K	80 K	80 K	105 K	105 K	105 K
Locked rotor time	36s (cold) 20s (hot)	27s (cold) 15s (hot)	27s (cold) 15s (hot)	27s (cold) 15s (hot)	27s (cold) 15s (hot)	27s (cold) 15s (hot)	27s (cold) 15s (hot)
Noise level ²	69.0 dB(A)						
Efficiency (%)	25%						
	50%	95.0	94.8	94.5	94.5	95.0	95.0
	75%	95.4	95.1	95.1	95.1	95.0	95.0
	100%	95.8	94.9	95.1	95.1	94.5	95.0
Power Factor	25%						
	50%	0.67	0.67	0.64	0.60	0.73	0.70
	75%	0.78	0.79	0.76	0.74	0.82	0.80
	100%	0.82	0.83	0.82	0.80	0.84	0.83
Losses at normative operating points (speed;torque), in percentage of rated output power							
Losses (%)	P1 (0,9;1,0)	4.6	5.7	5.4	5.4	6.1	5.6
	P2 (0,5;1,0)	3.8	4.6	4.4	4.4	5.0	4.5
	P3 (0,25;1,0)	3.4	4.2	4.0	4.0	4.5	4.1
	P4 (0,9;0,5)	2.4	2.9	2.8	2.8	3.2	2.9
	P5 (0,5;0,5)	1.7	2.0	1.9	1.9	2.2	2.0
	P6 (0,5;0,25)	1.2	1.4	1.4	1.4	1.5	1.4
	P7 (0,25;0,25)	0.7	0.9	0.9	0.9	1.0	0.9
Bearing type	: Drive end 6319 C3	Non drive end 6316 C3	Foundation loads				
Sealing	: WSeal	WSeal	Max. traction : 1912 kgf				
Lubrication interval	: 13000 h	16000 h	Max. compression : 2916 kgf				
Lubricant amount	: 45 g	34 g					
Lubricant type	: Mobil Polyrex EM						
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end.				These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.			
Rev.	Changes Summary			Performed	Checked	Date	
Performed by							
Checked by						Page	Revision
Date	15/01/2024					1 / 9	

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Notes
USABLE @208V 389A SF 1.00 SFA 389A

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	15/01/2024		2 / 9	

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11626903

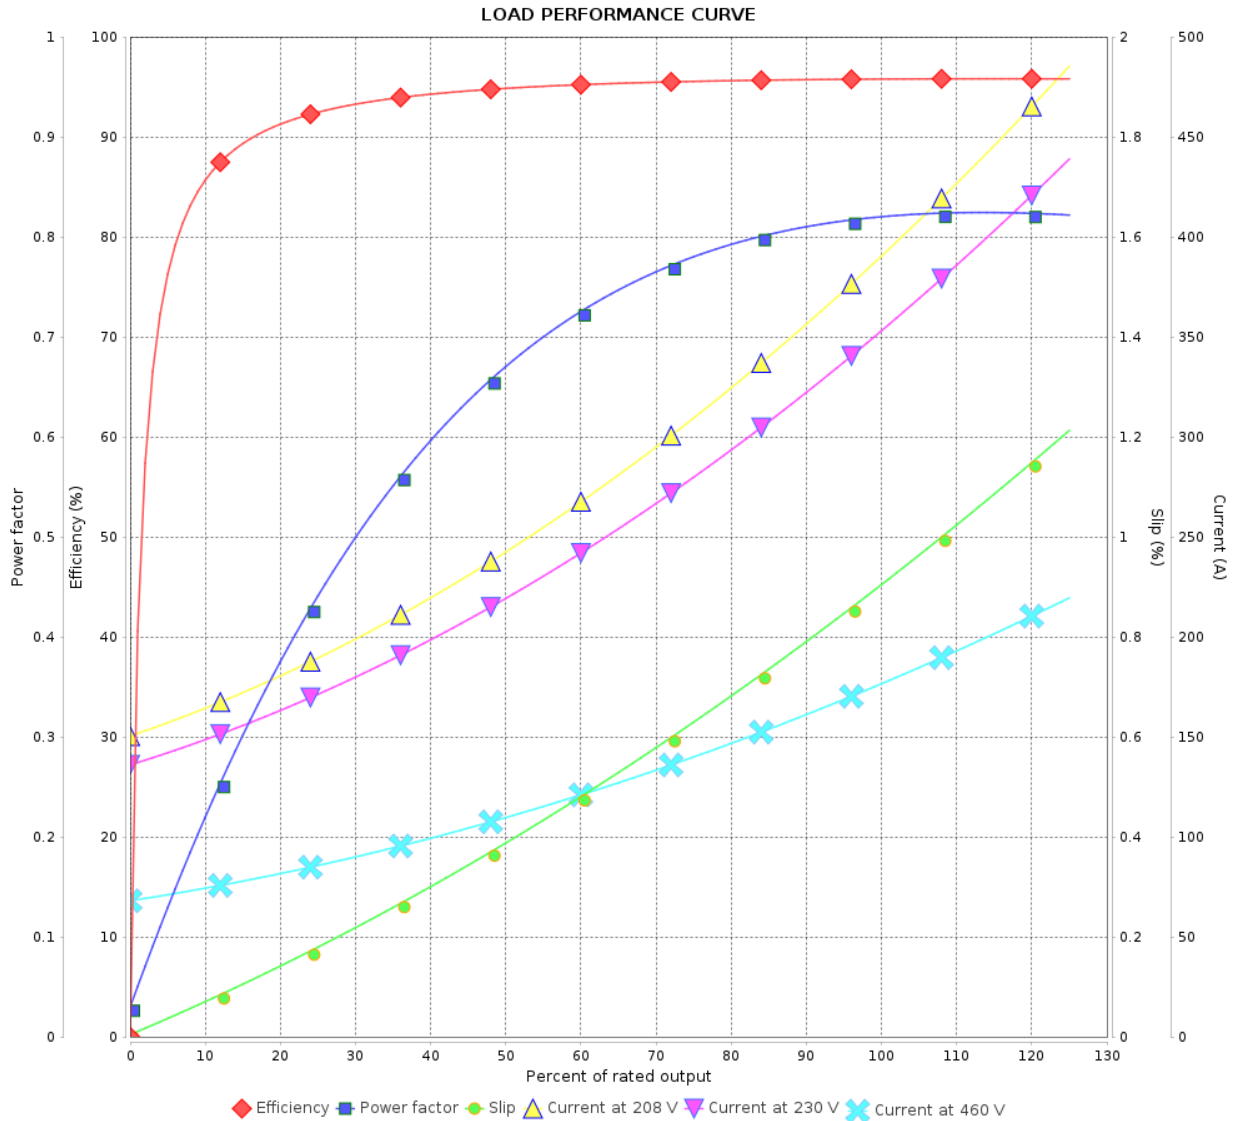

Performance : 230/460 V 60 Hz 6P

Rated current : 352/176 A
 LRC : 6.2
 Rated torque : 91.6 kgfm
 Locked rotor torque : 240 %
 Breakdown torque : 250 %
 Rated speed : 1189 rpm

Moment of inertia (J) : 5.63 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11626903

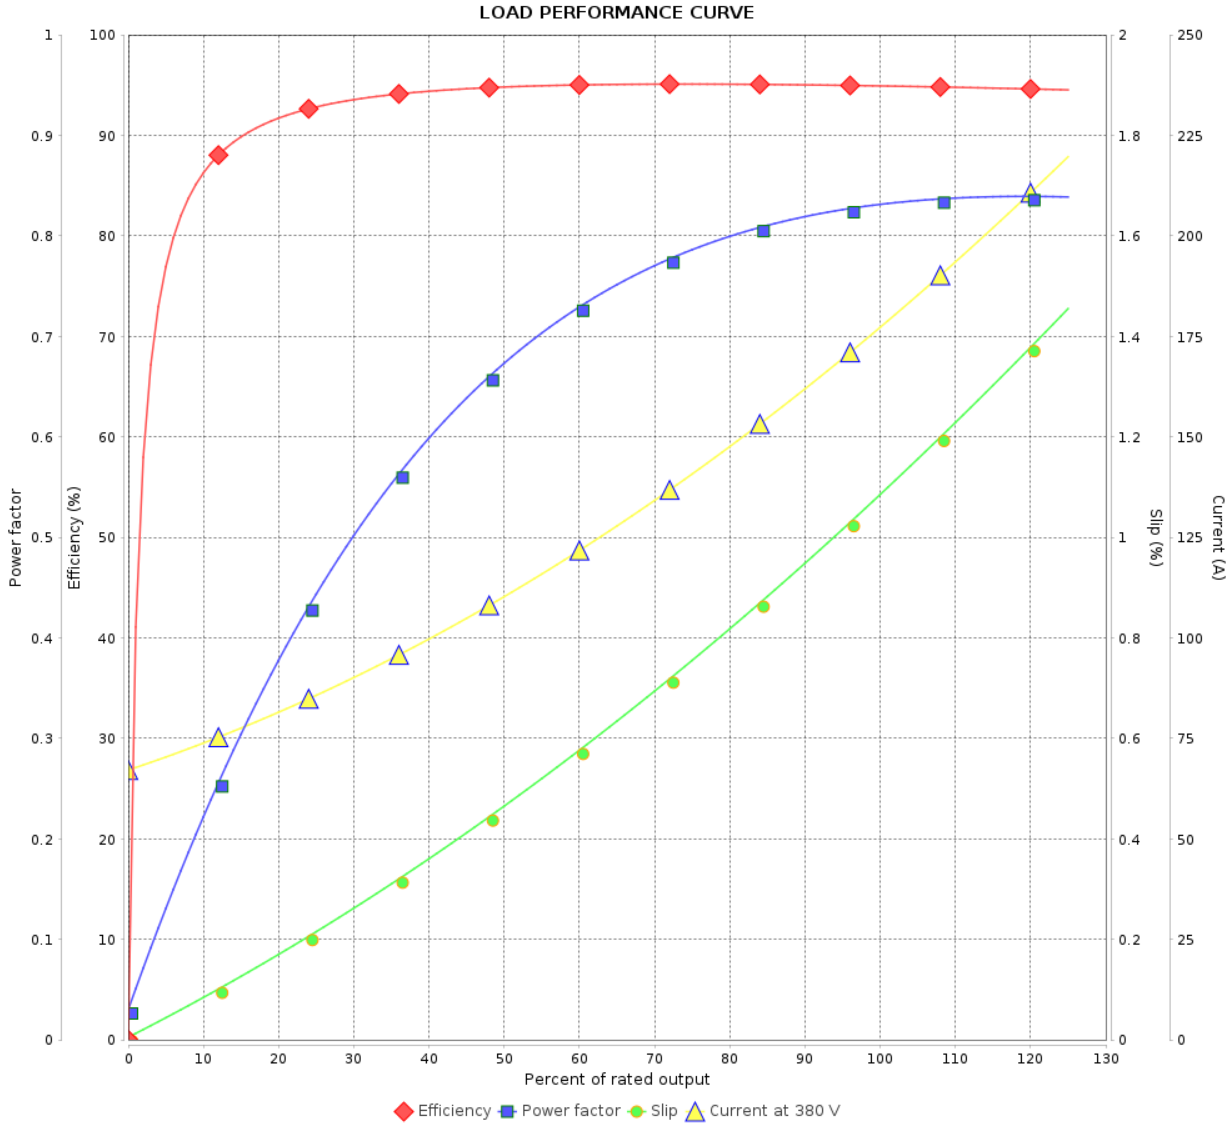

Performance : 380 V 50 Hz 6P IE3

Rated current : 174 A
 LRC : 6.0
 Rated torque : 91.7 kgfm
 Locked rotor torque : 229 %
 Breakdown torque : 240 %
 Rated speed : 989 rpm

Moment of inertia (J) : 5.63 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 4 / 9	Revision
Checked by				
Date	15/01/2024			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11626903

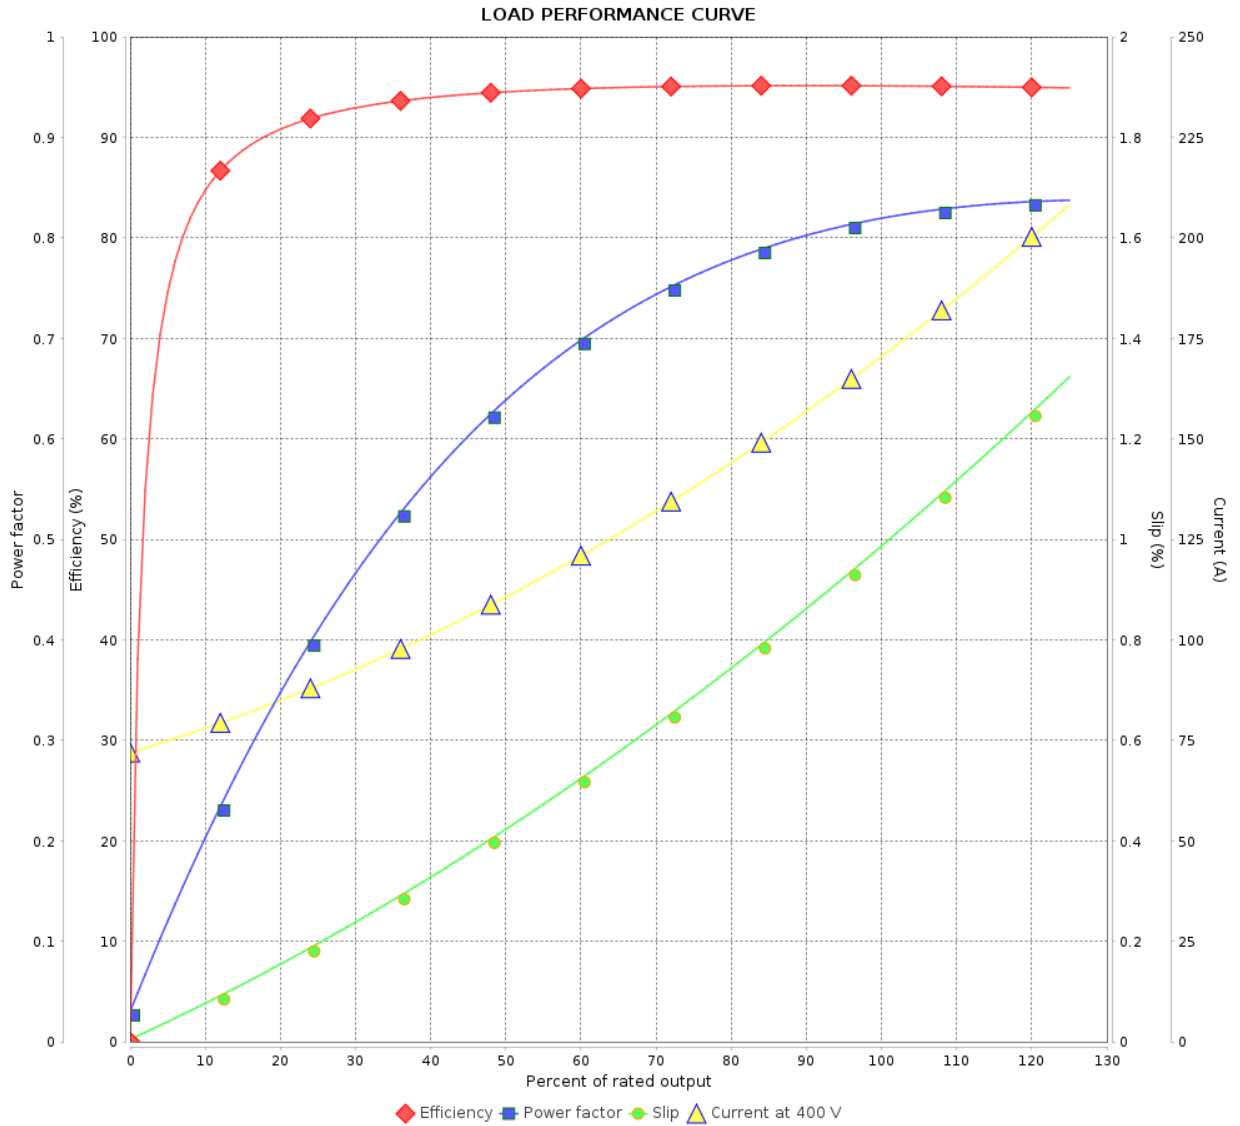

Performance : 400 V 50 Hz 6P IE3

Rated current : 167 A
 LRC : 6.5
 Rated torque : 91.6 kgfm
 Locked rotor torque : 260 %
 Breakdown torque : 270 %
 Rated speed : 990 rpm

Moment of inertia (J) : 5.63 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		5 / 9		
Date		15/01/2024		

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11626903

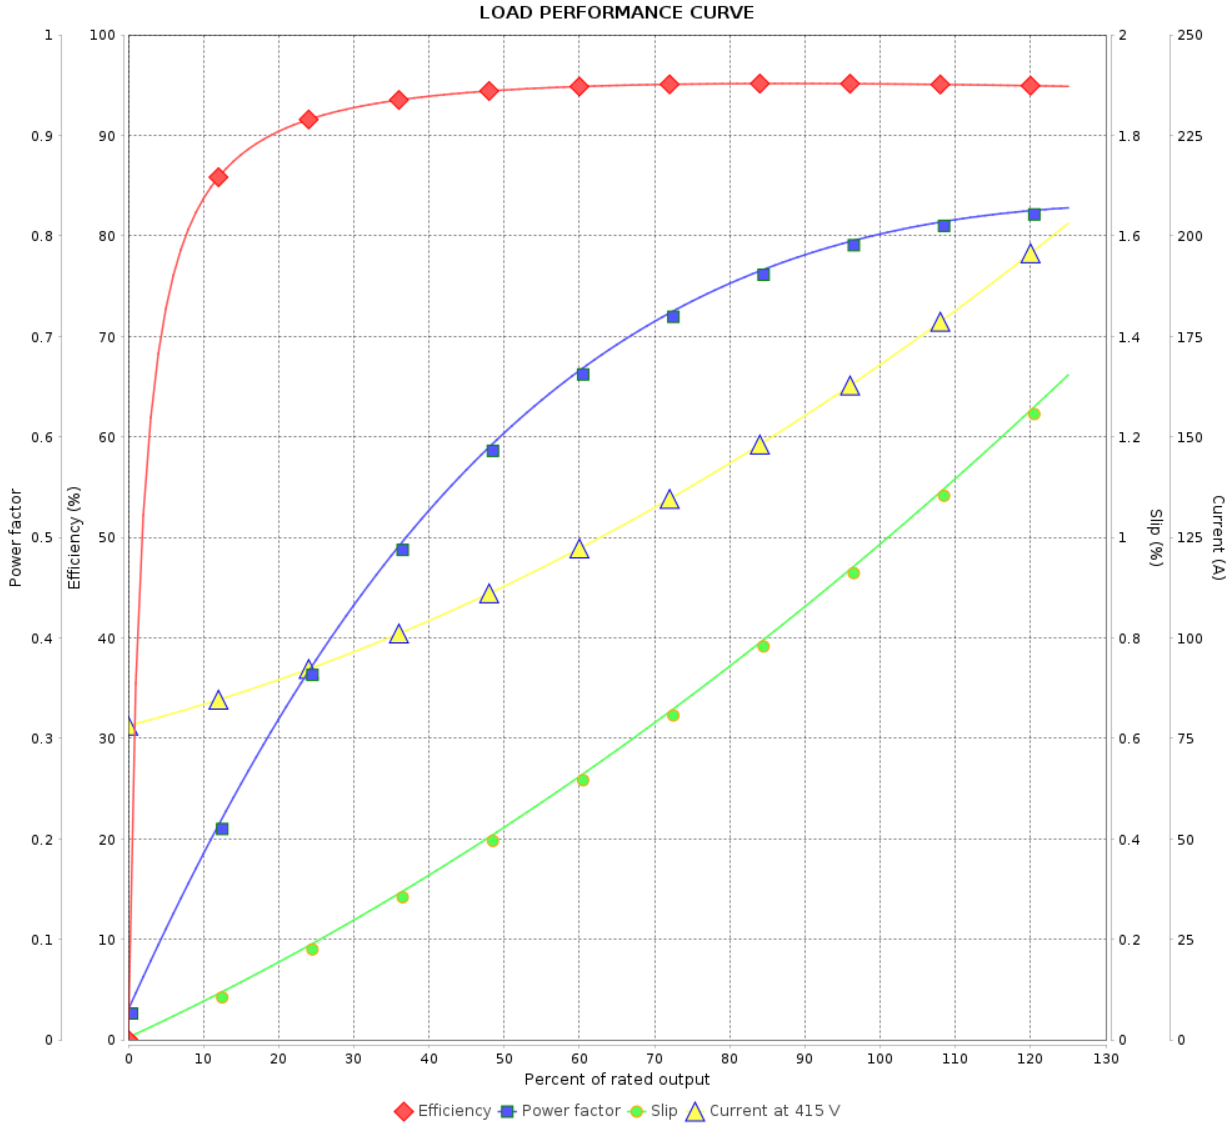

Performance : 415 V 50 Hz 6P IE3

Rated current : 165 A
 LRC : 7.0
 Rated torque : 91.6 kgfm
 Locked rotor torque : 280 %
 Breakdown torque : 290 %
 Rated speed : 990 rpm

Moment of inertia (J) : 5.63 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 6 / 9	Revision
Checked by				
Date	15/01/2024			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11626903

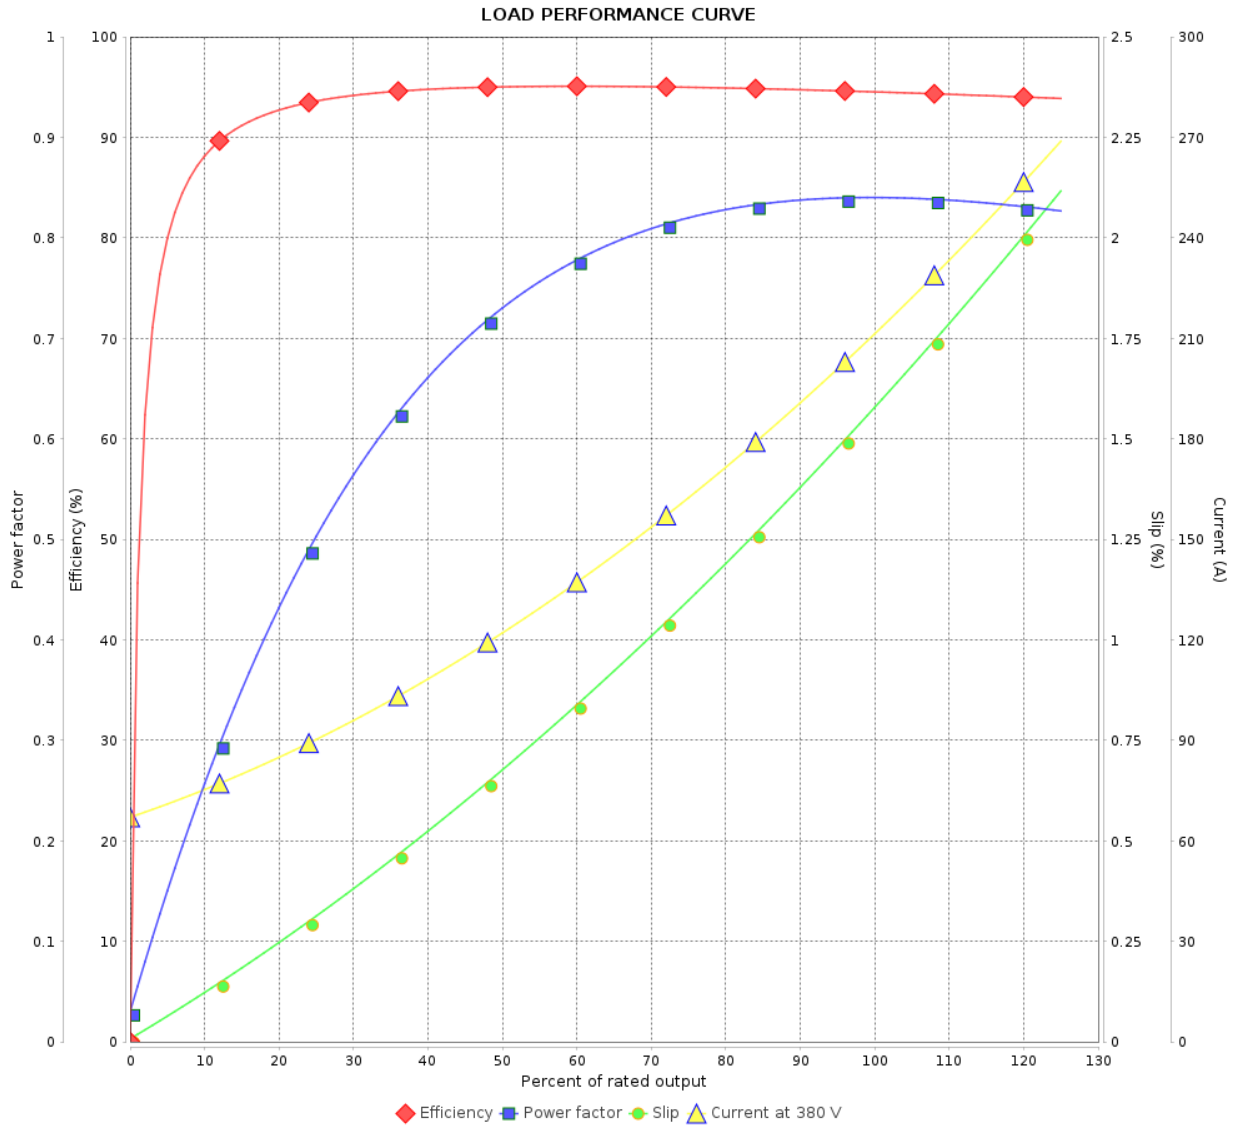

Performance : 380 V 50 Hz 6P IE2

Rated current : 211 A
 LRC : 5.0
 Rated torque : 111 kgfm
 Locked rotor torque : 190 %
 Breakdown torque : 200 %
 Rated speed : 984 rpm

Moment of inertia (J) : 5.63 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 105 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11626903

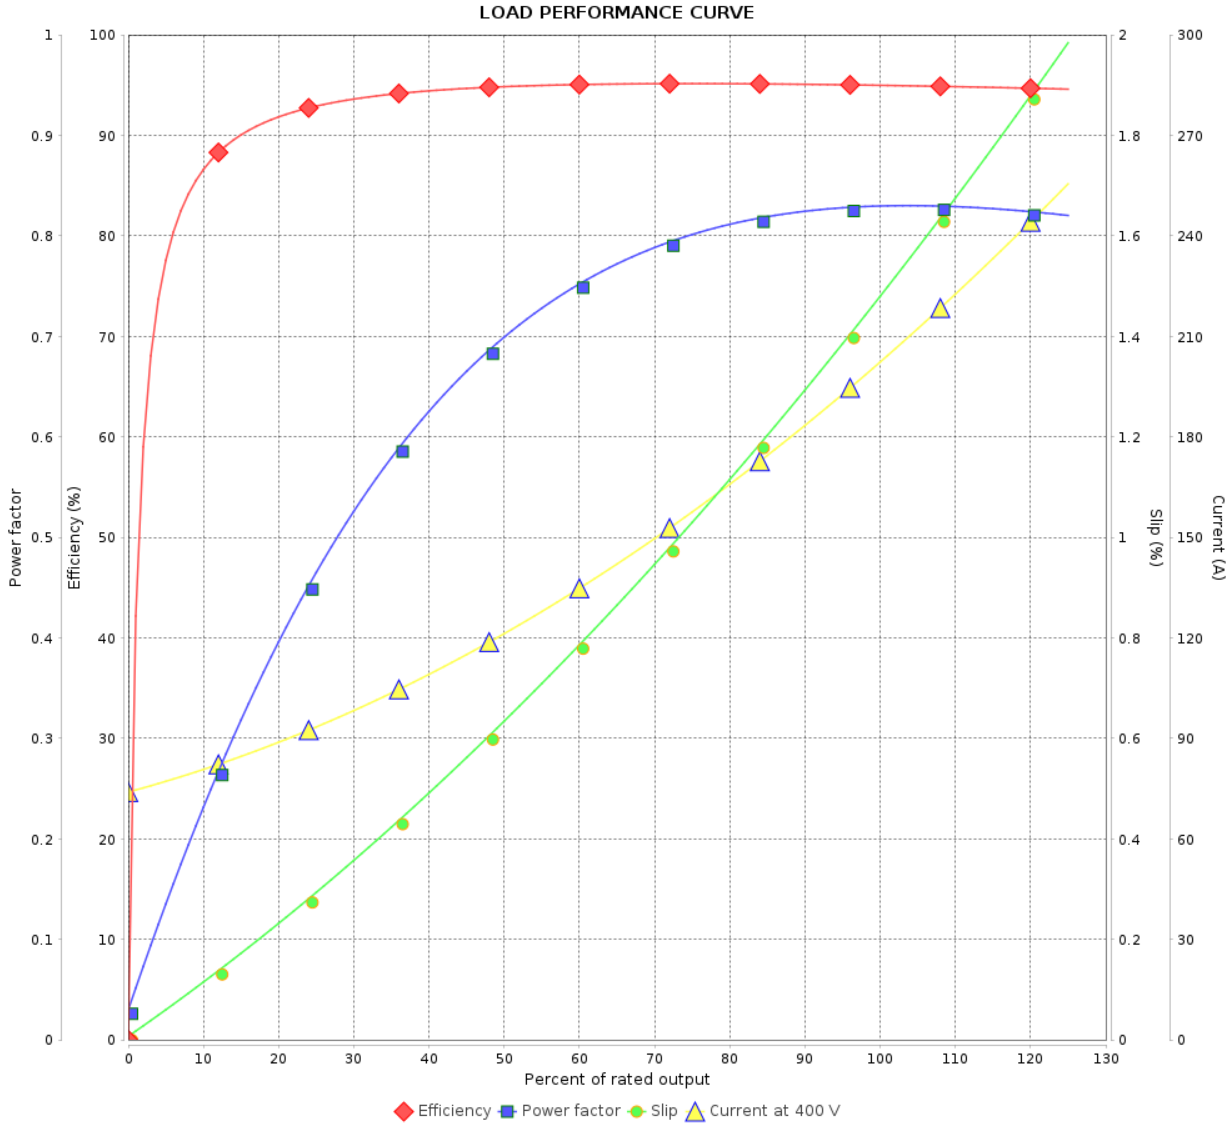

Performance : 400 V 50 Hz 6P IE2

Rated current	: 201 A	Moment of inertia (J)	: 5.63 kgm ²
LRC	: 5.5	Duty cycle	: Cont.(S1)
Rated torque	: 111 kgfm	Insulation class	: F
Locked rotor torque	: 200 %	Service factor	: 1.00
Breakdown torque	: 229 %	Temperature rise	: 105 K
Rated speed	: 985 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 8 / 9	Revision
Checked by				
Date	15/01/2024			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11626903

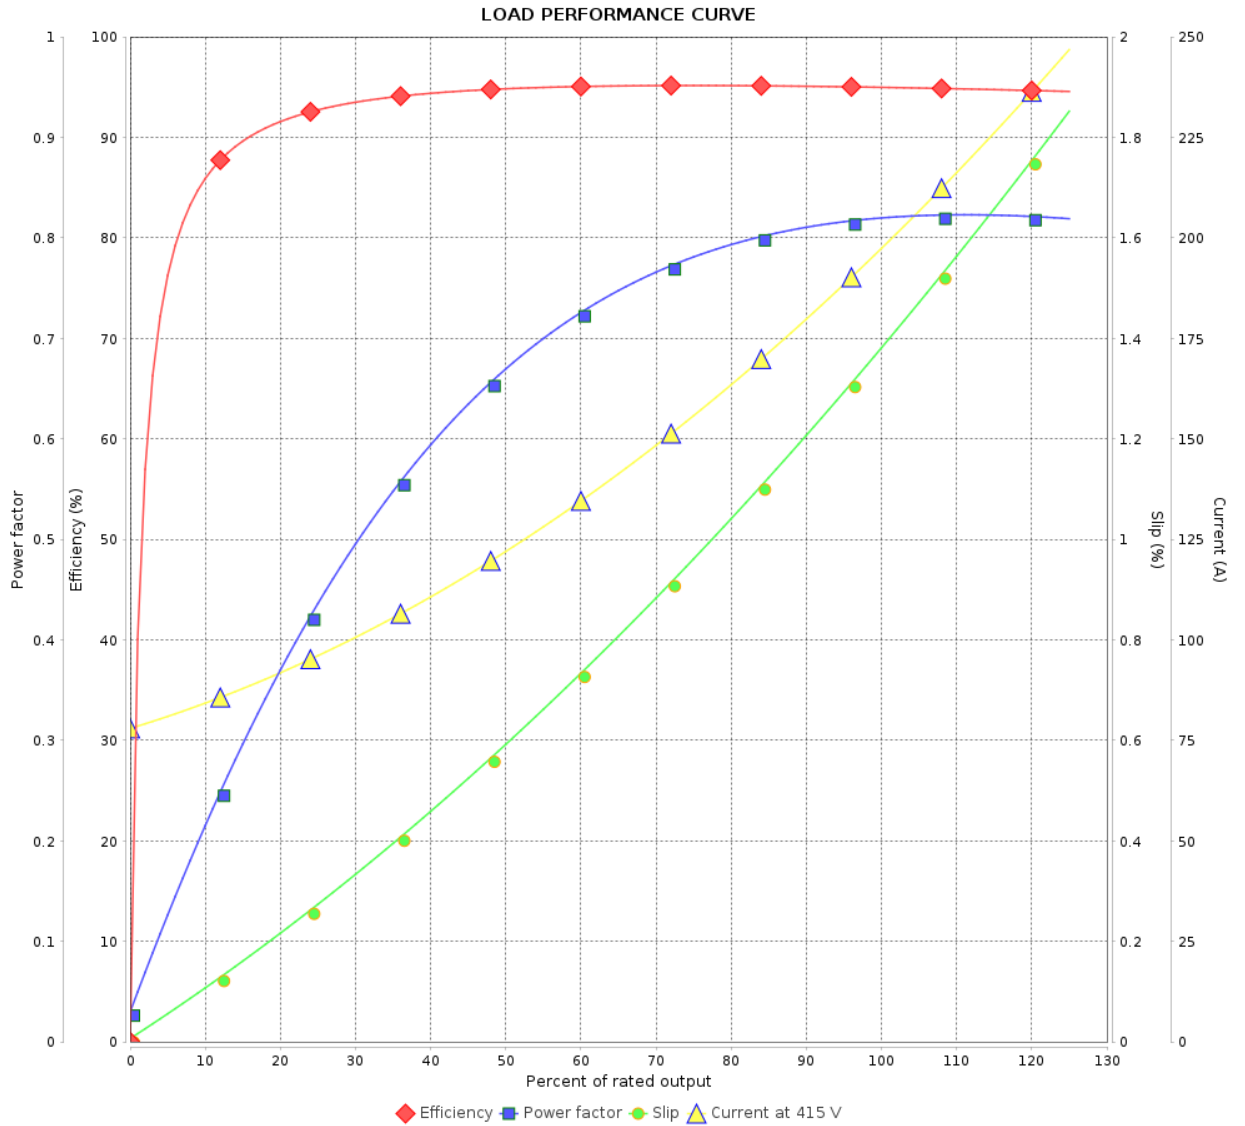

Performance : 415 V 50 Hz 6P IE2

Rated current : 196 A
 LRC : 6.0
 Rated torque : 110 kgfm
 Locked rotor torque : 220 %
 Breakdown torque : 250 %
 Rated speed : 986 rpm

Moment of inertia (J) : 5.63 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 105 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by				
Date				
			Page	Revision
			9 / 9	