

# DATA SHEET



## Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase      Product code : 11679237

Frame	: 586/7T	Locked rotor time	: 28s (cold) 16s (hot)
Output	: 600 HP (440 kW)	Temperature rise	: 80 K
Poles	: 4	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 460 V	Altitude	: 1000 m.a.s.l.
Rated current	: 665 A	Protection degree	: IP55
L. R. Amperes	: 4722 A	Cooling method	: IC411 - TEFC
LRC	: 7.1x(Code G)	Mounting	: F-1
No load current	: 210 A	Rotation <sup>1</sup>	: Both (CW and CCW)
Rated speed	: 1790 rpm	Noise level <sup>2</sup>	: 78.0 dB(A)
Slip	: 0.56 %	Starting method	: Direct On Line
Rated torque	: 243 kgfm	Approx. weight <sup>3</sup>	: 1966 kg
Locked rotor torque	: 229 %		
Breakdown torque	: 250 %		
Insulation class	: F		
Service factor	: 1.15		
Moment of inertia (J)	: 9.92 kgm <sup>2</sup>		

Output	25%	50%	75%	100%	Foundation loads	
Efficiency (%)	0.000	96.2	96.4	96.5	Max. traction	: 3180 kgf
Power Factor	0.00	0.74	0.82	0.86	Max. compression	: 5146 kgf

	<u>Drive end</u>	<u>Non drive end</u>
Bearing type	: 6322 C3	6319 C3
Sealing	: Taconite Labyrinth	Taconite Labyrinth
Lubrication interval	: 6000 h	8000 h
Lubricant amount	: 60 g	45 g
Lubricant type	: Mobil Polyrex EM	

Notes:

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		1 / 3		
Date	13/01/2024			

# DATA SHEET

## Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

### Space heater information

Voltage: 200 - 240 V

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	13/01/2024		2 / 3	

# LOAD PERFORMANCE CURVE


## Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11679237

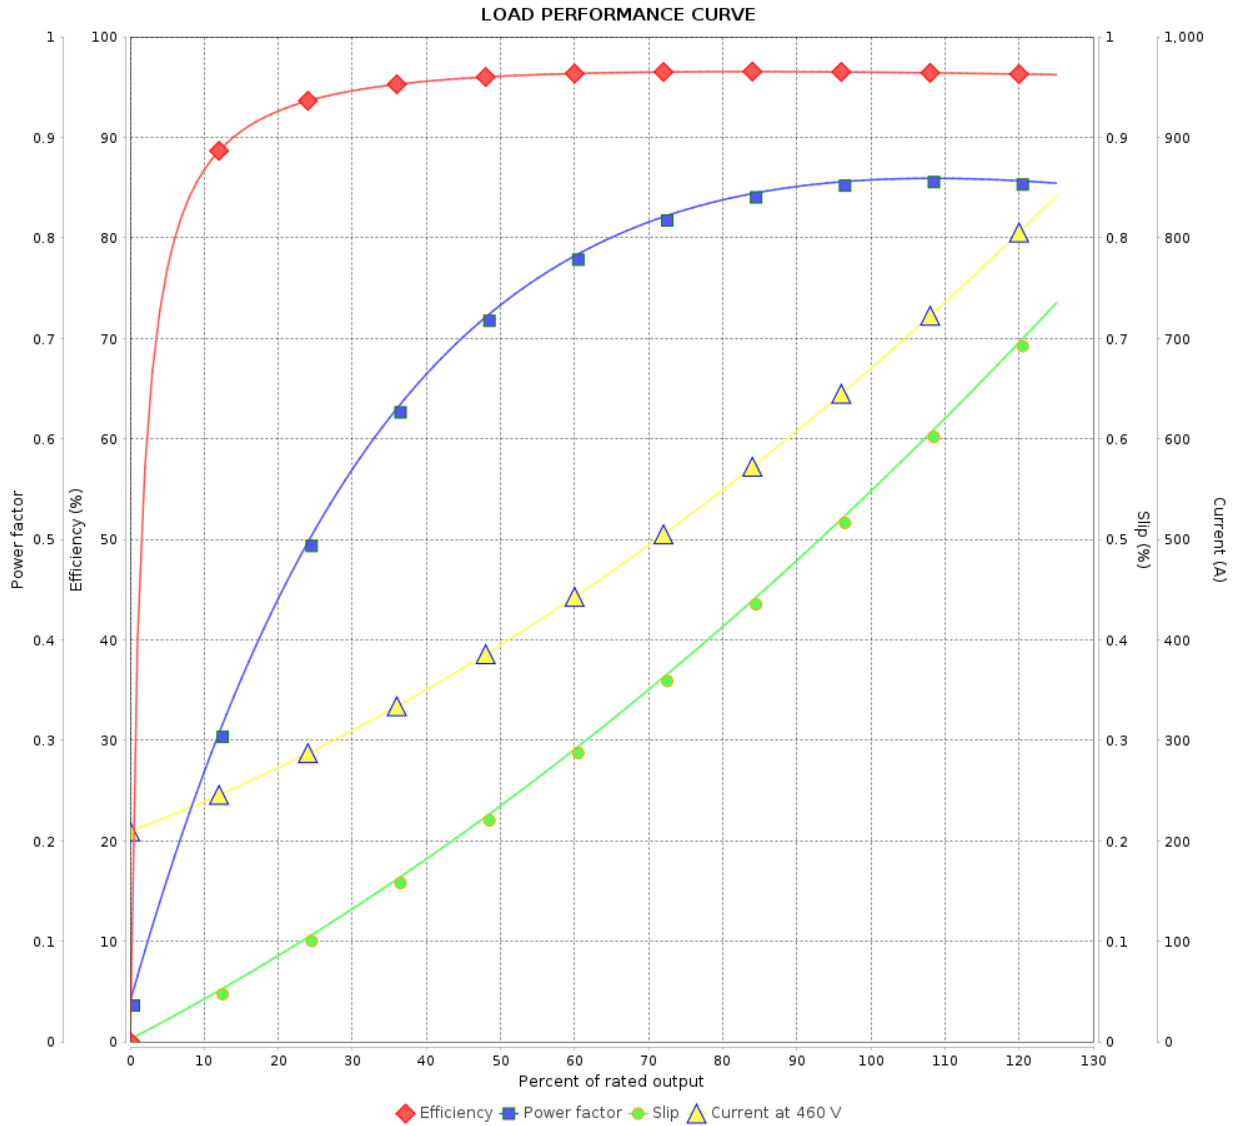

Performance : 460 V 60 Hz 4P

Rated current : 665 A  
 LRC : 7.1  
 Rated torque : 243 kgfm  
 Locked rotor torque : 229 %  
 Breakdown torque : 250 %  
 Rated speed : 1790 rpm

Moment of inertia (J) : 9.92 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.15  
 Temperature rise : 80 K

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				