

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase Product code : 12109342

Frame	: 586/7T	Locked rotor time	: 72s (cold) 40s (hot)
Output	: 200 HP (150 kW)	Temperature rise	: 80 K
Poles	: 8	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 575 V	Altitude	: 1000 m.a.s.l.
Rated current	: 198 A	Protection degree	: IP55
L. R. Amperes	: 1245 A	Cooling method	: IC411 - TEFC
LRC	: 6.3x(Code G)	Mounting	: F-1
No load current	: 80.0 A	Rotation ¹	: Both (CW and CCW)
Rated speed	: 894 rpm	Noise level ²	: 75.0 dB(A)
Slip	: 0.67 %	Starting method	: Direct On Line
Rated torque	: 162 kgfm	Approx. weight ³	: 1611 kg
Locked rotor torque	: 140 %		
Breakdown torque	: 210 %		
Insulation class	: F		
Service factor	: 1.15		
Moment of inertia (J)	: 14.8 kgm ²		
Design	: B		

Output	50%	75%	100%	Foundation loads	
Efficiency (%)	95.0	95.4	95.4	Max. traction	: 1529 kgf
Power Factor	0.65	0.75	0.80	Max. compression	: 3139 kgf

Losses at normative operating points (speed;torque), in percentage of rated output power

P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
4.9	3.8	3.3	2.7	1.8	1.3	0.8

	<u>Drive end</u>	<u>Non drive end</u>
Bearing type	: NU-322 C3	: 6319 C3
Sealing	: Taconite Labyrinth	: Taconite Labyrinth
Lubrication interval	: 13000 h	: 17000 h
Lubricant amount	: 60 g	: 45 g
Lubricant type	: Mobil Polyrex EM	

Notes:

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		1 / 3		
Date	13/01/2024			

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Space heater information

Voltage: 200 - 240 V

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	13/01/2024		2 / 3	

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 12109342

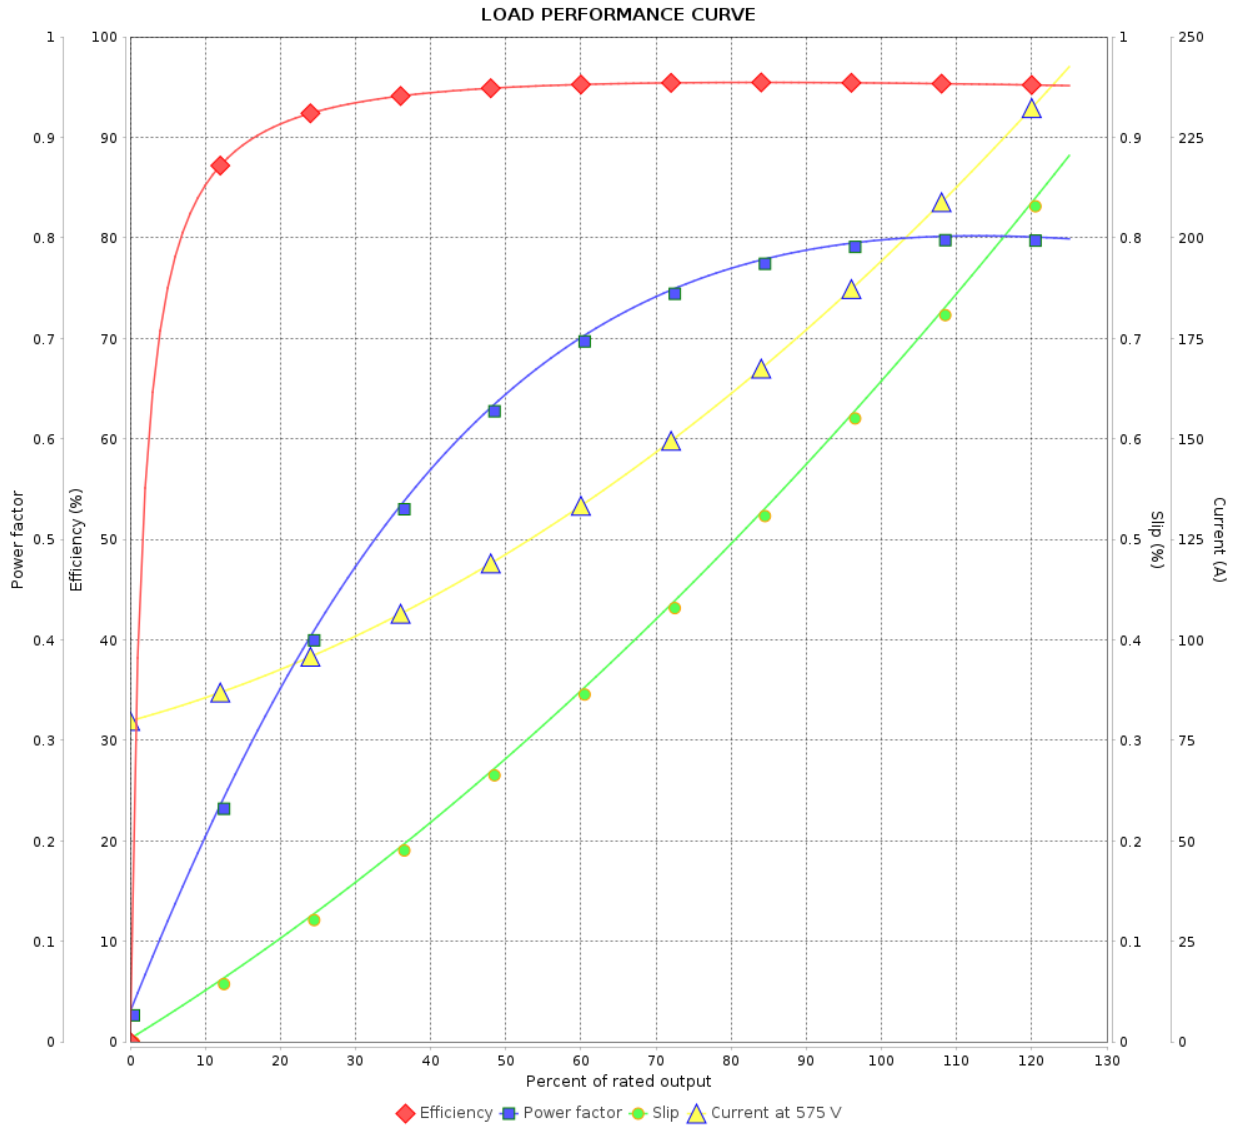

Performance : 575 V 60 Hz 8P

Rated current : 198 A
 LRC : 6.3
 Rated torque : 162 kgfm
 Locked rotor torque : 140 %
 Breakdown torque : 210 %
 Rated speed : 894 rpm

Moment of inertia (J) : 14.8 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		3 / 3		
Date		13/01/2024		