

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :							
Product line : W22 NEMA Premium Efficiency Three-Phase			Product code : 12717280				
Frame	: 213/5TC		Locked rotor time	: 36s (cold) 20s (hot)			
Output	: 7.5 HP (5.5 kW)		Temperature rise	: 80 K			
Poles	: 2		Duty cycle	: Cont.(S1)			
Frequency	: 60 Hz		Ambient temperature	: -20°C to +40°C			
Rated voltage	: 575 V		Altitude	: 1000 m.a.s.l.			
Rated current	: 7.01 A		Protection degree	: IP55			
L. R. Amperes	: 50.5 A		Cooling method	: IC411 - TEFC			
LRC	: 7.2x(Code H)		Mounting	: F-1			
No load current	: 2.40 A		Rotation ¹	: Both (CW and CCW)			
Rated speed	: 3530 rpm		Noise level ²	: 68.0 dB(A)			
Slip	: 1.94 %		Starting method	: Direct On Line			
Rated torque	: 1.54 kgfm		Approx. weight ³	: 68.5 kg			
Locked rotor torque	: 210 %						
Breakdown torque	: 300 %						
Insulation class	: F						
Service factor	: 1.25						
Moment of inertia (J)	: 0.0197 kgm ²						
Design	: B						
Output	50%	75%	100%	Foundation loads			
Efficiency (%)	87.5	89.5	89.5	Max. traction	: 51 kgf		
Power Factor	0.75	0.84	0.88	Max. compression	: 119 kgf		
Losses at normative operating points (speed;torque), in percentage of rated output power							
P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)	
11.3	9.1	8.4	5.9	3.6	2.4	1.5	
		<u>Drive end</u>		<u>Non drive end</u>			
Bearing type	:	6308 ZZ		6207 ZZ			
Sealing	:	V'Ring		V'Ring			
Lubrication interval	:	-		-			
Lubricant amount	:	-		-			
Lubricant type	:	Mobil Polyrex EM					
Notes:							
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.				These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.			
Rev.	Changes Summary			Performed	Checked	Date	
Performed by							
Checked by					Page	Revision	
Date	20/05/2024				1 / 2		

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 12717280

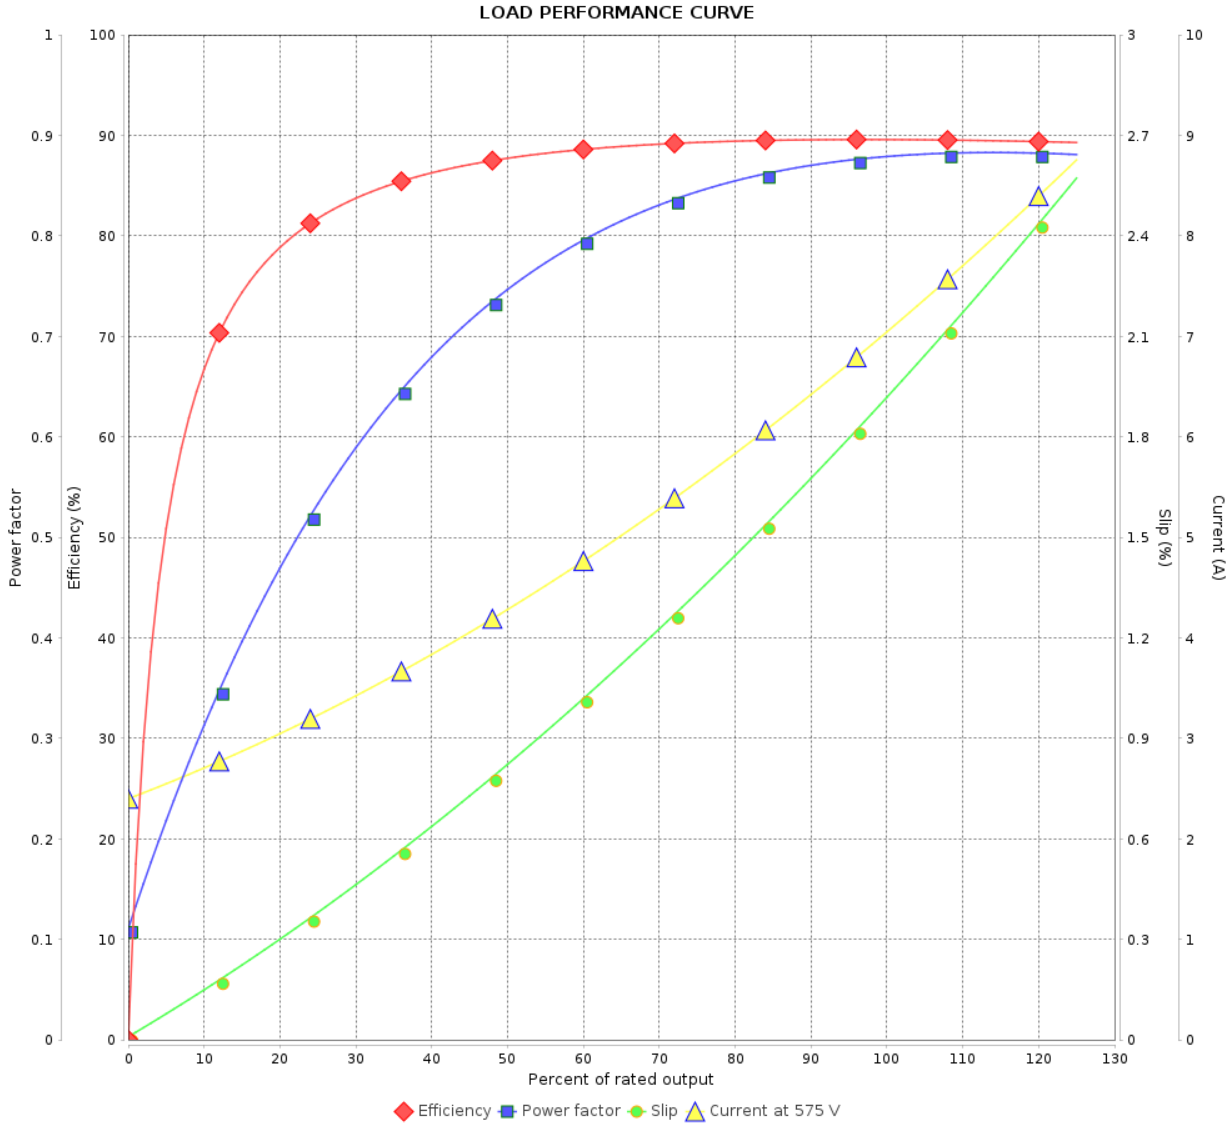

Performance : 575 V 60 Hz 2P

Rated current : 7.01 A
 LRC : 7.2
 Rated torque : 1.54 kgfm
 Locked rotor torque : 210 %
 Breakdown torque : 300 %
 Rated speed : 3530 rpm

Moment of inertia (J) : 0.0197 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.25
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				