

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :							
Product line	: W22 IEEE 841 NEMA Premium Efficiency Three-Phase	Product code :	13869845				
Frame	: 364/5T	Cooling method	: IC411 - TEFC				
Insulation class	: F	Mounting	: F-1				
Duty cycle	: Cont.(S1)	Rotation ¹	: Both (CW and CCW)				
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line				
Altitude	: 1000 m.a.s.l.	Approx. weight ³	: 394 kg				
Protection degree	: IP55	Moment of inertia (J)	: 0.9448 kgm ²				
Design	: B						
Output [HP]	60	50	50	50	60	60	60
Poles	4	4	4	4	4	4	4
Frequency [Hz]	60	50	50	50	50	50	50
Rated voltage [V]	460	380	400	415	380	400	415
Rated current [A]	71.6	71.0	69.1	67.4	86.5	82.6	80.2
L. R. Amperes [A]	444	447	477	499	450	479	497
LRC [A]	6.2x(Code G)	6.3x(Code G)	6.9x(Code H)	7.4x(Code J)	5.2x(Code E)	5.8x(Code F)	6.2x(Code G)
No load current [A]	28.0	27.6	29.8	31.6	27.6	29.8	31.6
Rated speed [RPM]	1780	1480	1482	1484	1470	1475	1477
Slip [%]	1.11	1.33	1.20	1.07	2.00	1.67	1.53
Rated torque [kgfm]	24.5	24.5	24.5	24.5	29.6	29.5	29.5
Locked rotor torque [%]	220	200	220	240	160	180	200
Breakdown torque [%]	240	240	260	280	200	210	229
Service factor	1.25	1.00	1.00	1.00	1.00	1.00	1.00
Temperature rise	80 K	80 K	80 K	80 K	105 K	105 K	105 K
Locked rotor time	27s (cold) 15s (hot)	18s (cold) 10s (hot)	18s (cold) 10s (hot)	18s (cold) 10s (hot)	18s (cold) 10s (hot)	18s (cold) 10s (hot)	18s (cold) 10s (hot)
Noise level ²	67.0 dB(A)	63.0 dB(A)	63.0 dB(A)	63.0 dB(A)	63.0 dB(A)	63.0 dB(A)	63.0 dB(A)
Efficiency (%)	25%						
	50%	94.1	93.7	93.3	93.4	94.1	94.1
	75%	94.5	93.9	93.9	94.2	93.6	94.1
	100%	95.0	94.2	94.2	94.3	93.0	94.1
Power Factor	25%						
	50%	0.71	0.71	0.68	0.65	0.76	0.73
	75%	0.80	0.80	0.78	0.76	0.82	0.81
	100%	0.83	0.84	0.82	0.81	0.85	0.84
Losses at normative operating points (speed;torque), in percentage of rated output power							
Losses (%)	P1 (0,9;1,0)	5.1	5.1	5.1	5.1	5.1	5.1
	P2 (0,5;1,0)	4.1	4.1	4.1	4.1	4.1	4.1
	P3 (0,25;1,0)	3.8	3.8	3.8	3.8	3.8	3.8
	P4 (0,9;0,5)	2.6	2.6	2.6	2.6	2.6	2.6
	P5 (0,5;0,5)	1.7	1.7	1.7	1.7	1.7	1.7
	P6 (0,5;0,25)	1.2	1.2	1.2	1.2	1.2	1.2
	P7 (0,25;0,25)	0.8	0.8	0.8	0.8	0.8	0.8
Bearing type	: Drive end 6314 C3	: Non drive end 6314 C3	Foundation loads				
Sealing	: Inpro/Seal	: Inpro/Seal	Max. traction : 564 kgf				
Lubrication interval	: 12000 h	: 12000 h	Max. compression : 958 kgf				
Lubricant amount	: 27 g	: 27 g					
Lubricant type	: Mobil Polyrex EM						
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end.				These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.			
Rev.	Changes Summary			Performed	Checked	Date	
Performed by							
Checked by						Page	Revision
Date	13/01/2024					1 / 9	

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Notes

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	13/01/2024		2 / 9	


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase Product code : 13869845

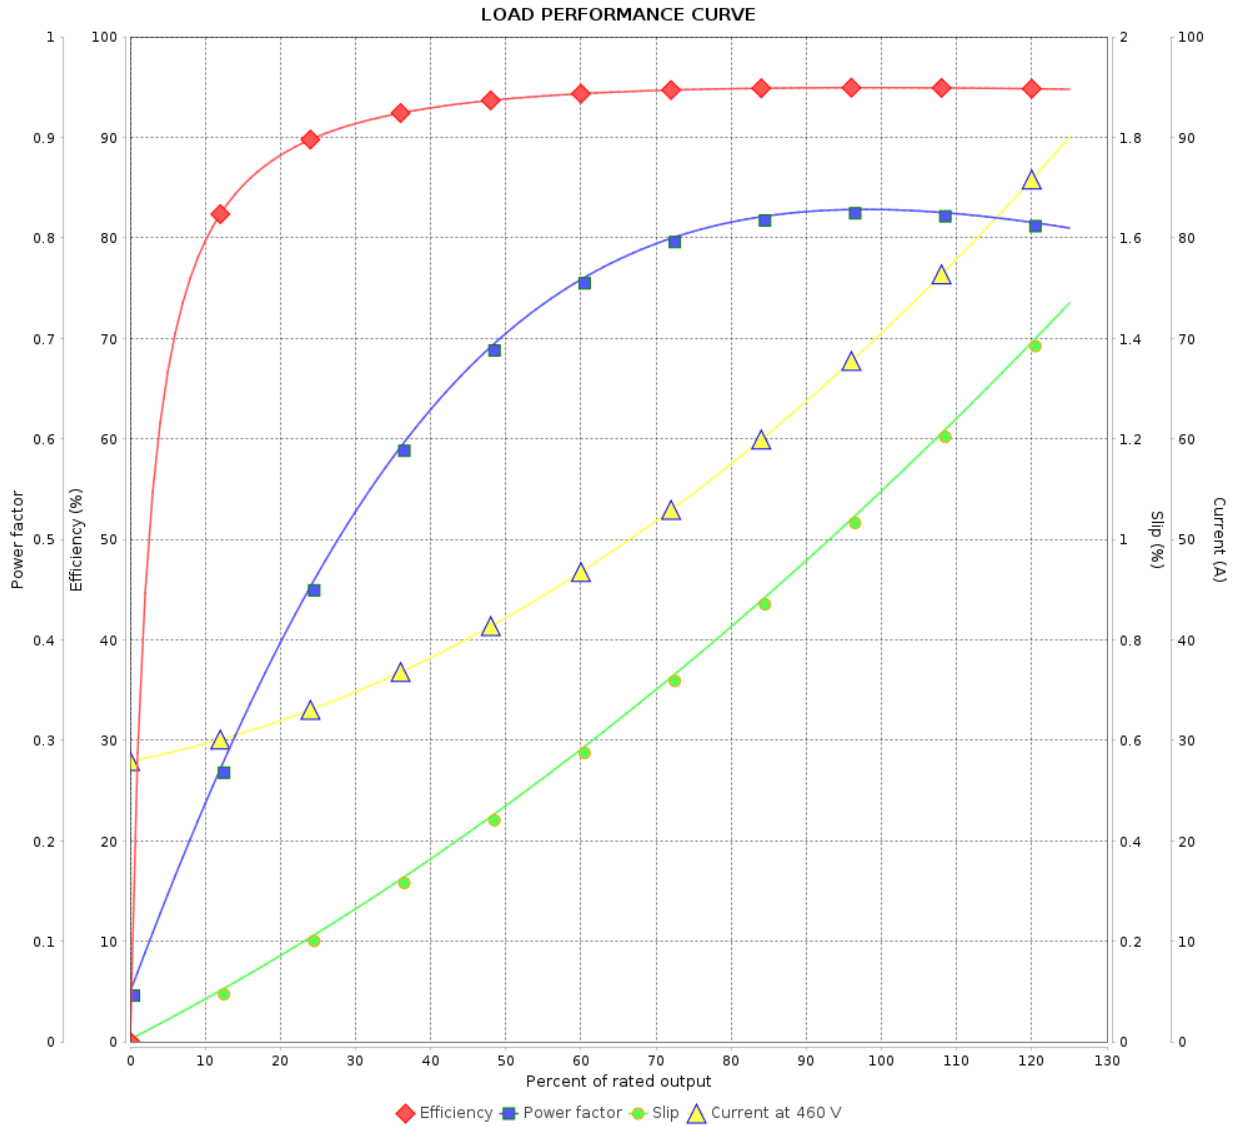

Performance : 460 V 60 Hz 4P

Rated current	: 71.6 A	Moment of inertia (J)	: 0.9448 kgm ²
LRC	: 6.2	Duty cycle	: Cont.(S1)
Rated torque	: 24.5 kgfm	Insulation class	: F
Locked rotor torque	: 220 %	Service factor	: 1.25
Breakdown torque	: 240 %	Temperature rise	: 80 K
Rated speed	: 1780 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 3 / 9	Revision
Checked by				
Date	13/01/2024			


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase Product code : 13869845

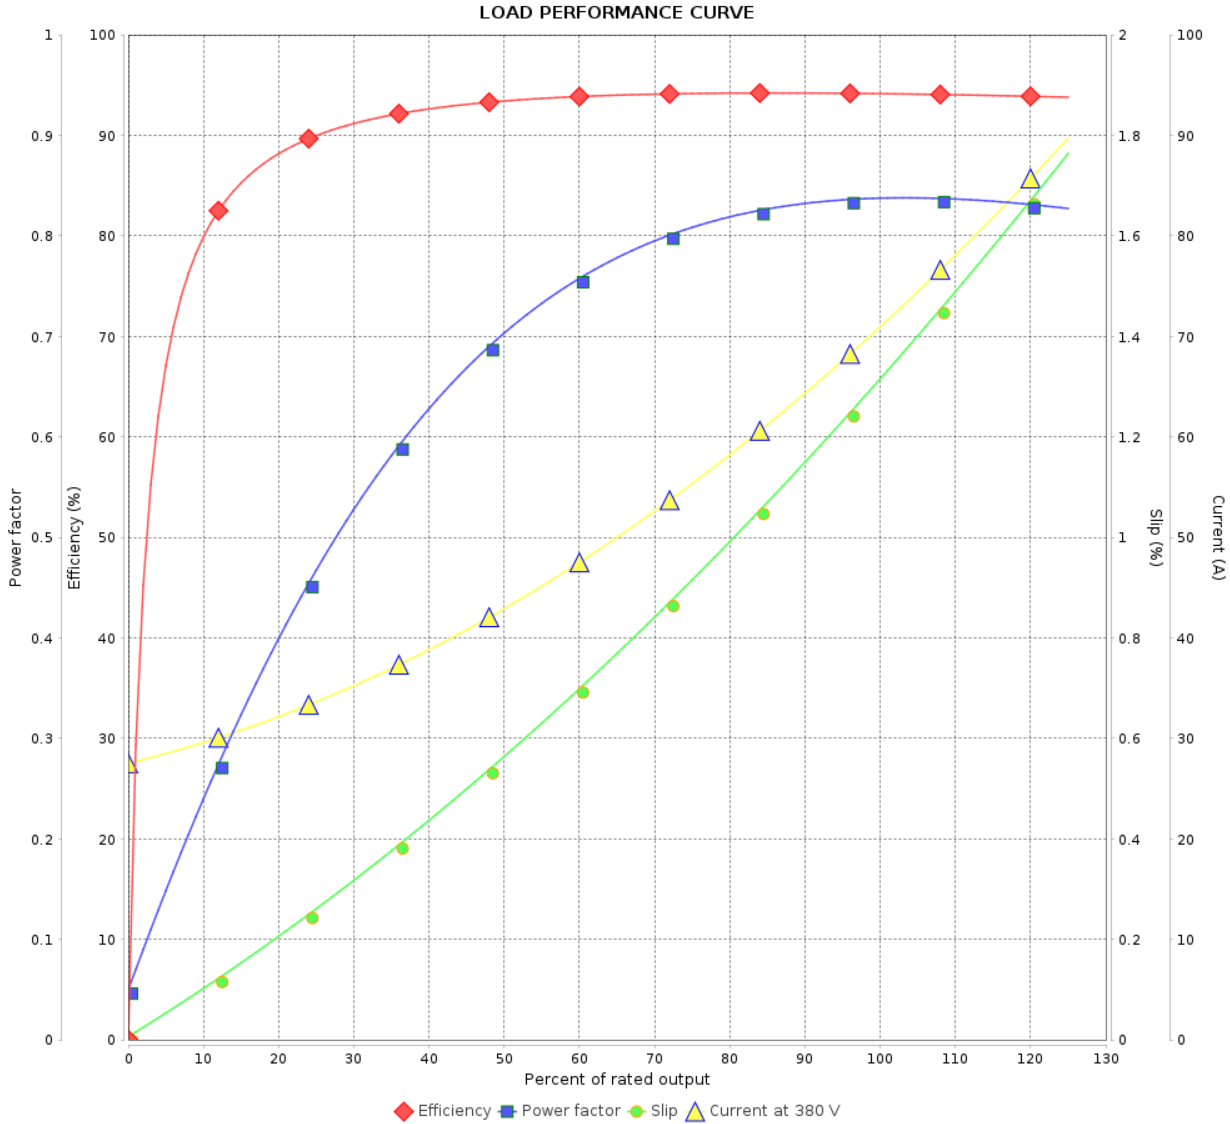

Performance : 380 V 50 Hz 4P IE3

Rated current	: 71.0 A	Moment of inertia (J)	: 0.9448 kgm ²
LRC	: 6.3	Duty cycle	: Cont.(S1)
Rated torque	: 24.5 kgfm	Insulation class	: F
Locked rotor torque	: 200 %	Service factor	: 1.00
Breakdown torque	: 240 %	Temperature rise	: 80 K
Rated speed	: 1480 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 4 / 9	Revision
Checked by				
Date	13/01/2024			


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase Product code : 13869845

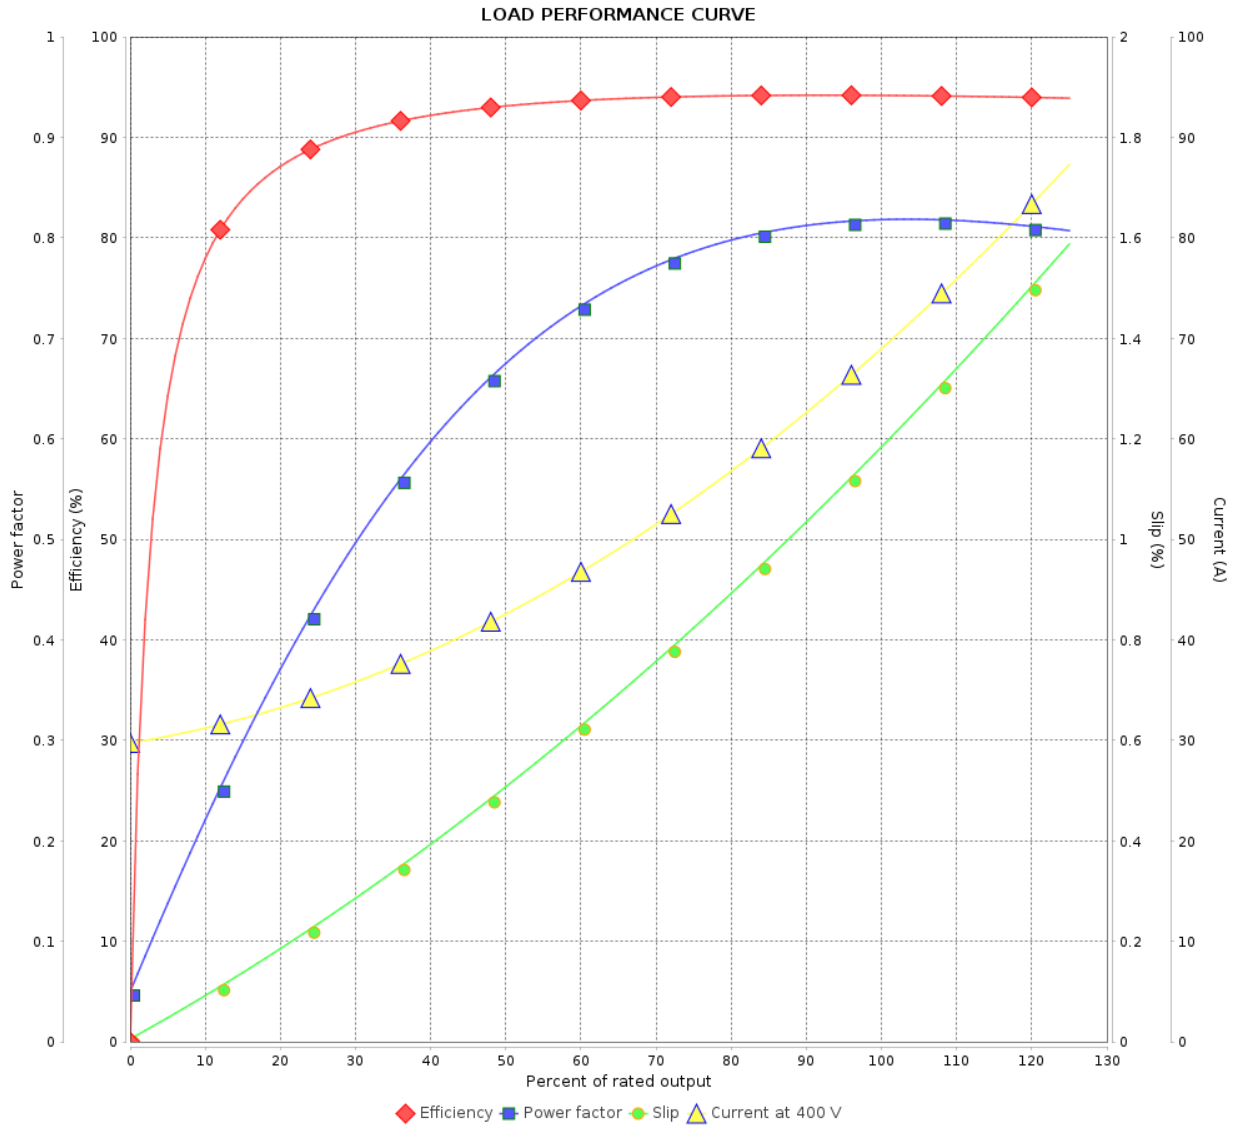

Performance : 400 V 50 Hz 4P IE3

Rated current	: 69.1 A	Moment of inertia (J)	: 0.9448 kgm ²
LRC	: 6.9	Duty cycle	: Cont.(S1)
Rated torque	: 24.5 kgfm	Insulation class	: F
Locked rotor torque	: 220 %	Service factor	: 1.00
Breakdown torque	: 260 %	Temperature rise	: 80 K
Rated speed	: 1482 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 5 / 9	Revision
Checked by				
Date	13/01/2024			


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase Product code : 13869845

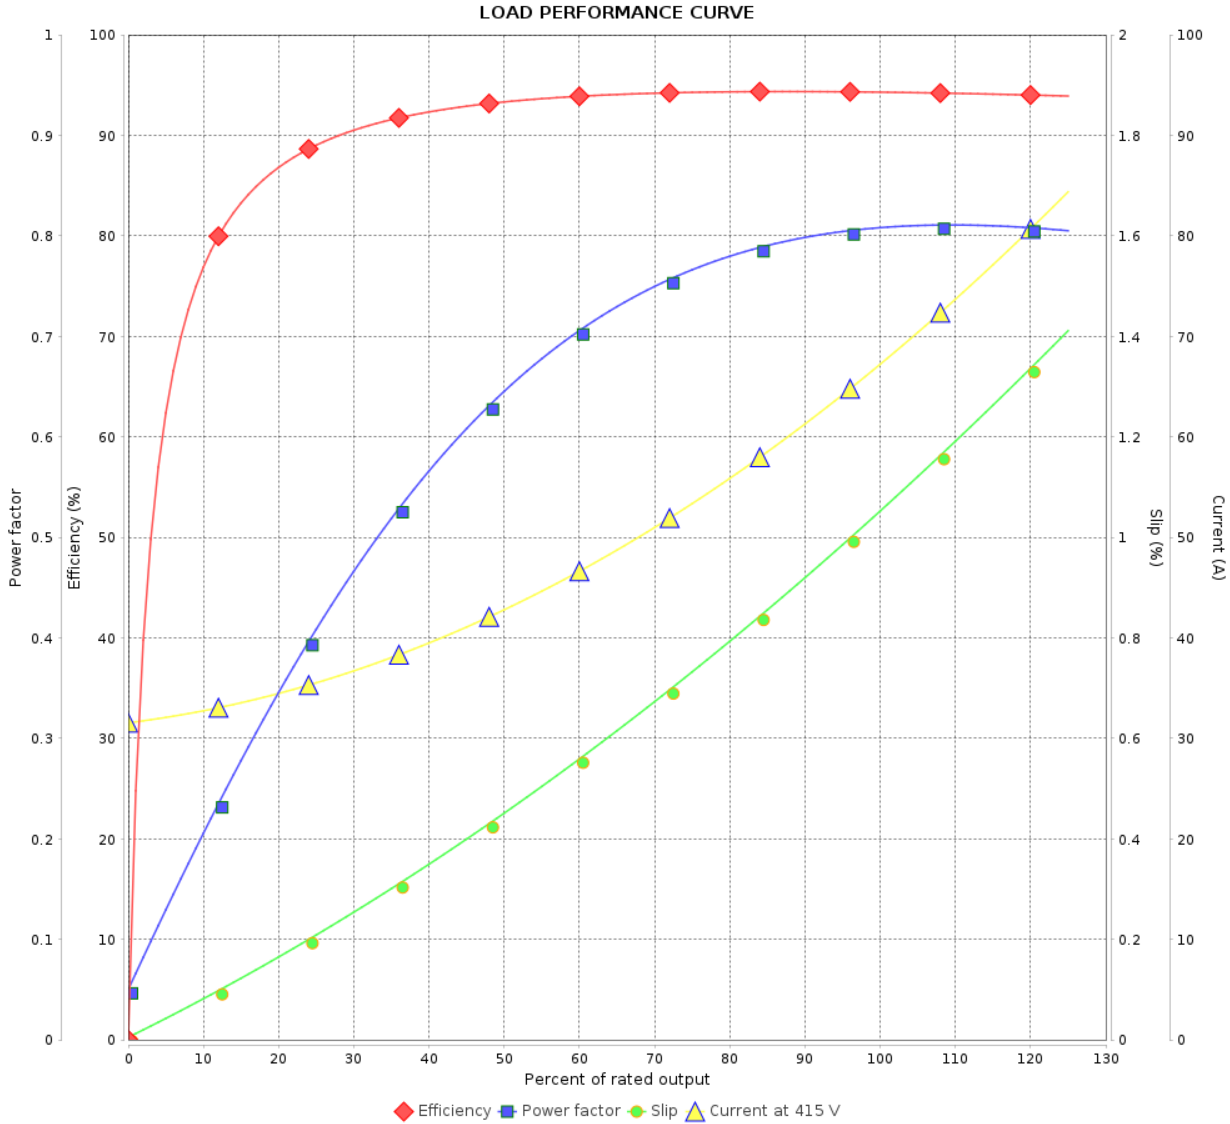

Performance : 415 V 50 Hz 4P IE3

Rated current	: 67.4 A	Moment of inertia (J)	: 0.9448 kgm ²
LRC	: 7.4	Duty cycle	: Cont.(S1)
Rated torque	: 24.5 kgfm	Insulation class	: F
Locked rotor torque	: 240 %	Service factor	: 1.00
Breakdown torque	: 280 %	Temperature rise	: 80 K
Rated speed	: 1484 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by			6 / 9	
Date	13/01/2024			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase

Product code : 13869845

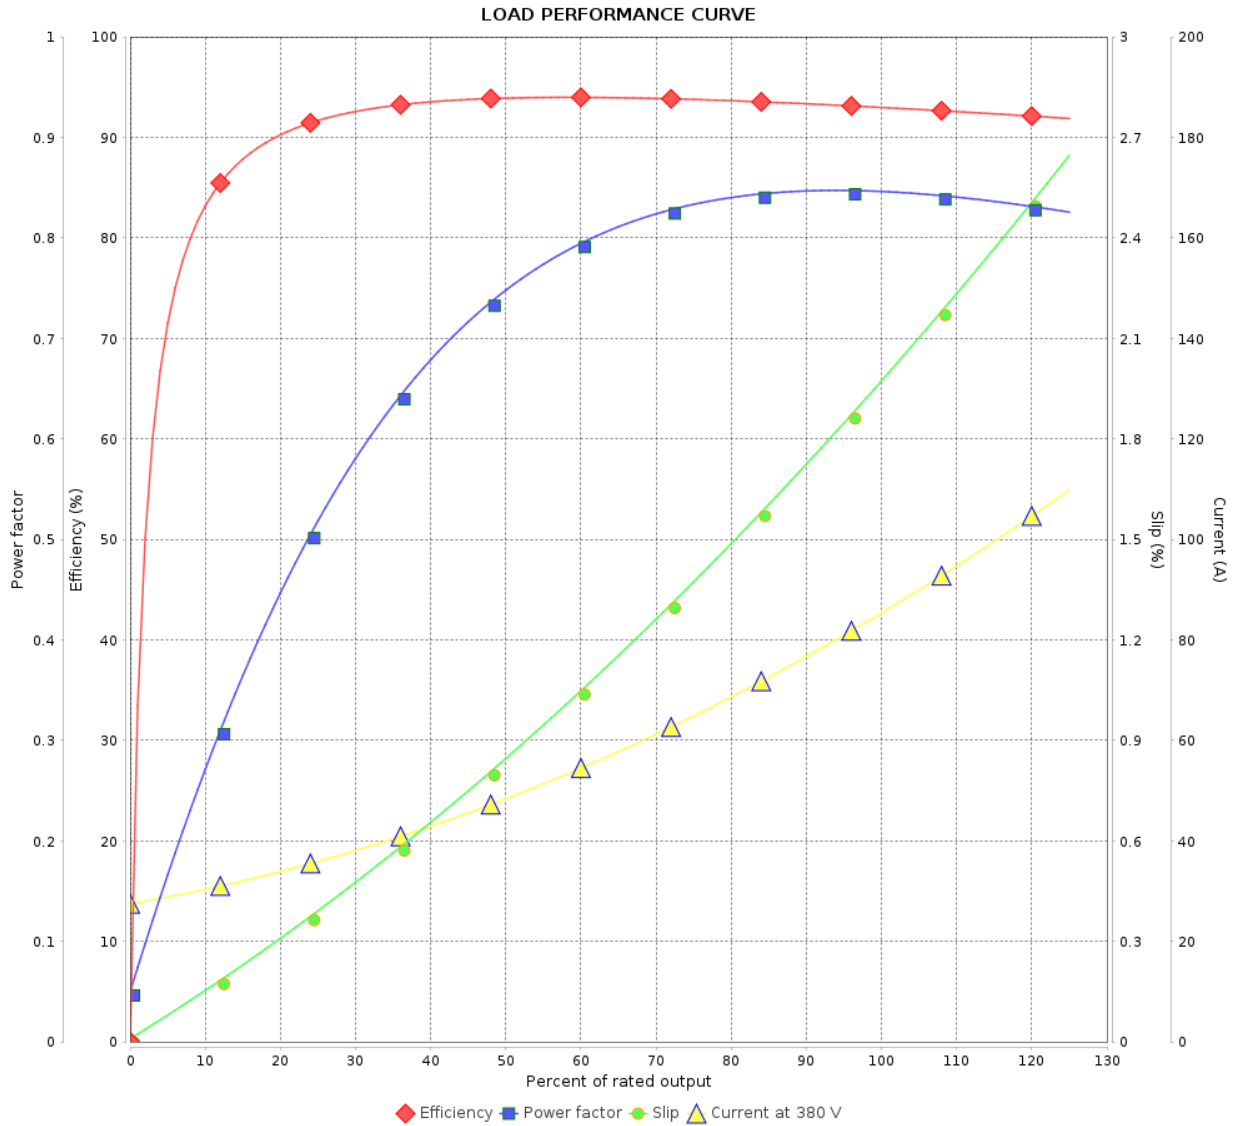

Performance : 380 V 50 Hz 4P IE1

Rated current : 86.5 A
 LRC : 5.2
 Rated torque : 29.6 kgfm
 Locked rotor torque : 160 %
 Breakdown torque : 200 %
 Rated speed : 1470 rpm

Moment of inertia (J) : 0.9448 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 105 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		7 / 9		
Date		13/01/2024		


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase Product code : 13869845

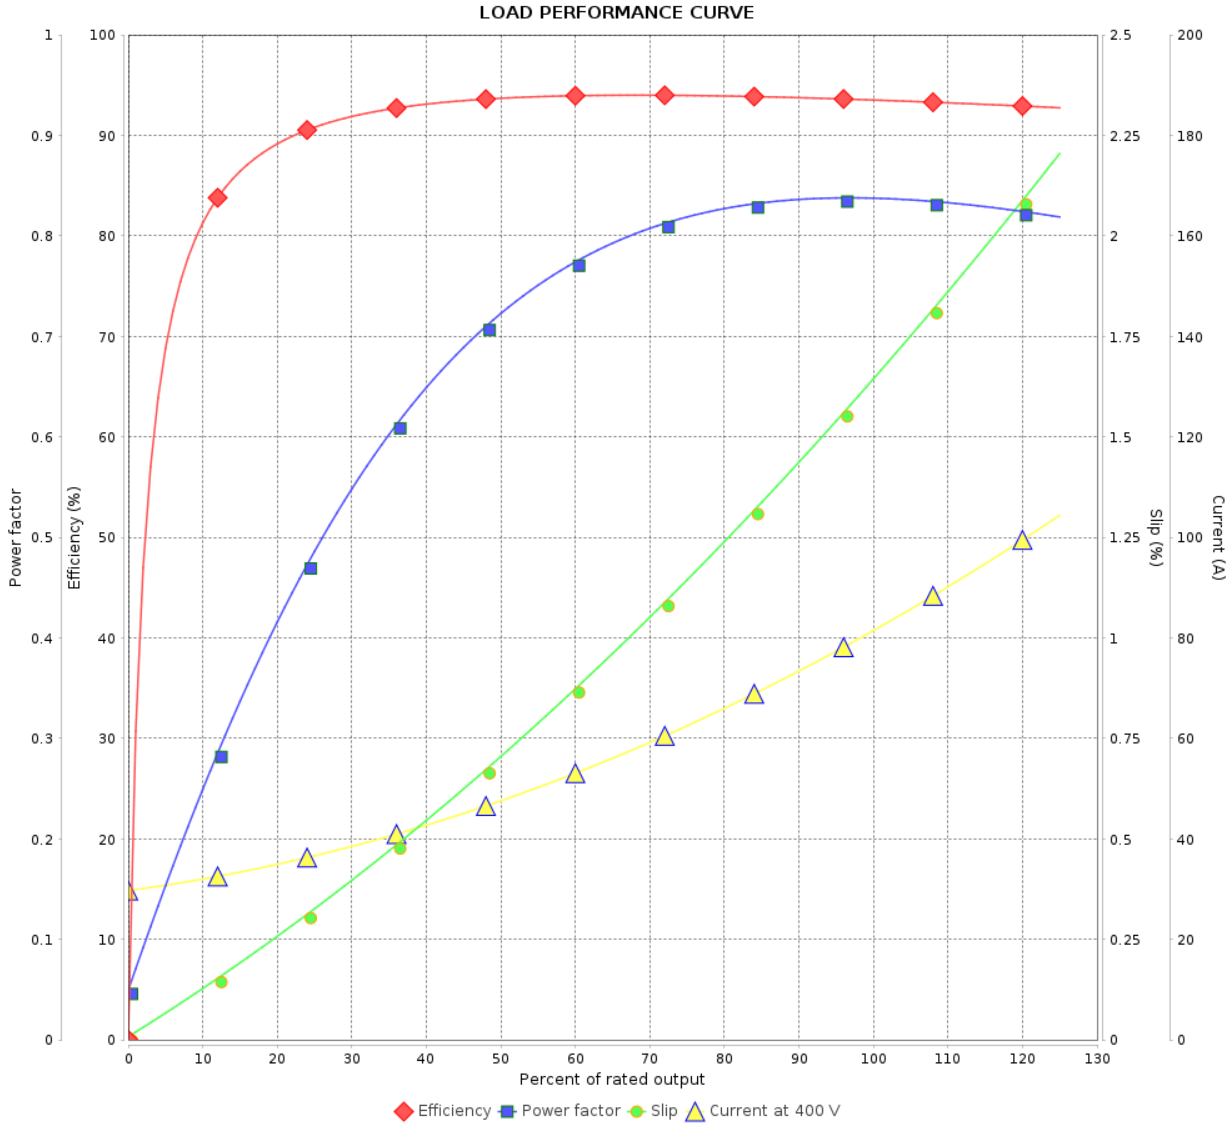

Performance : 400 V 50 Hz 4P IE2

Rated current	: 82.6 A	Moment of inertia (J)	: 0.9448 kgm ²
LRC	: 5.8	Duty cycle	: Cont.(S1)
Rated torque	: 29.5 kgfm	Insulation class	: F
Locked rotor torque	: 180 %	Service factor	: 1.00
Breakdown torque	: 210 %	Temperature rise	: 105 K
Rated speed	: 1475 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 8 / 9	Revision
Checked by				
Date	13/01/2024			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase

Product code : 13869845

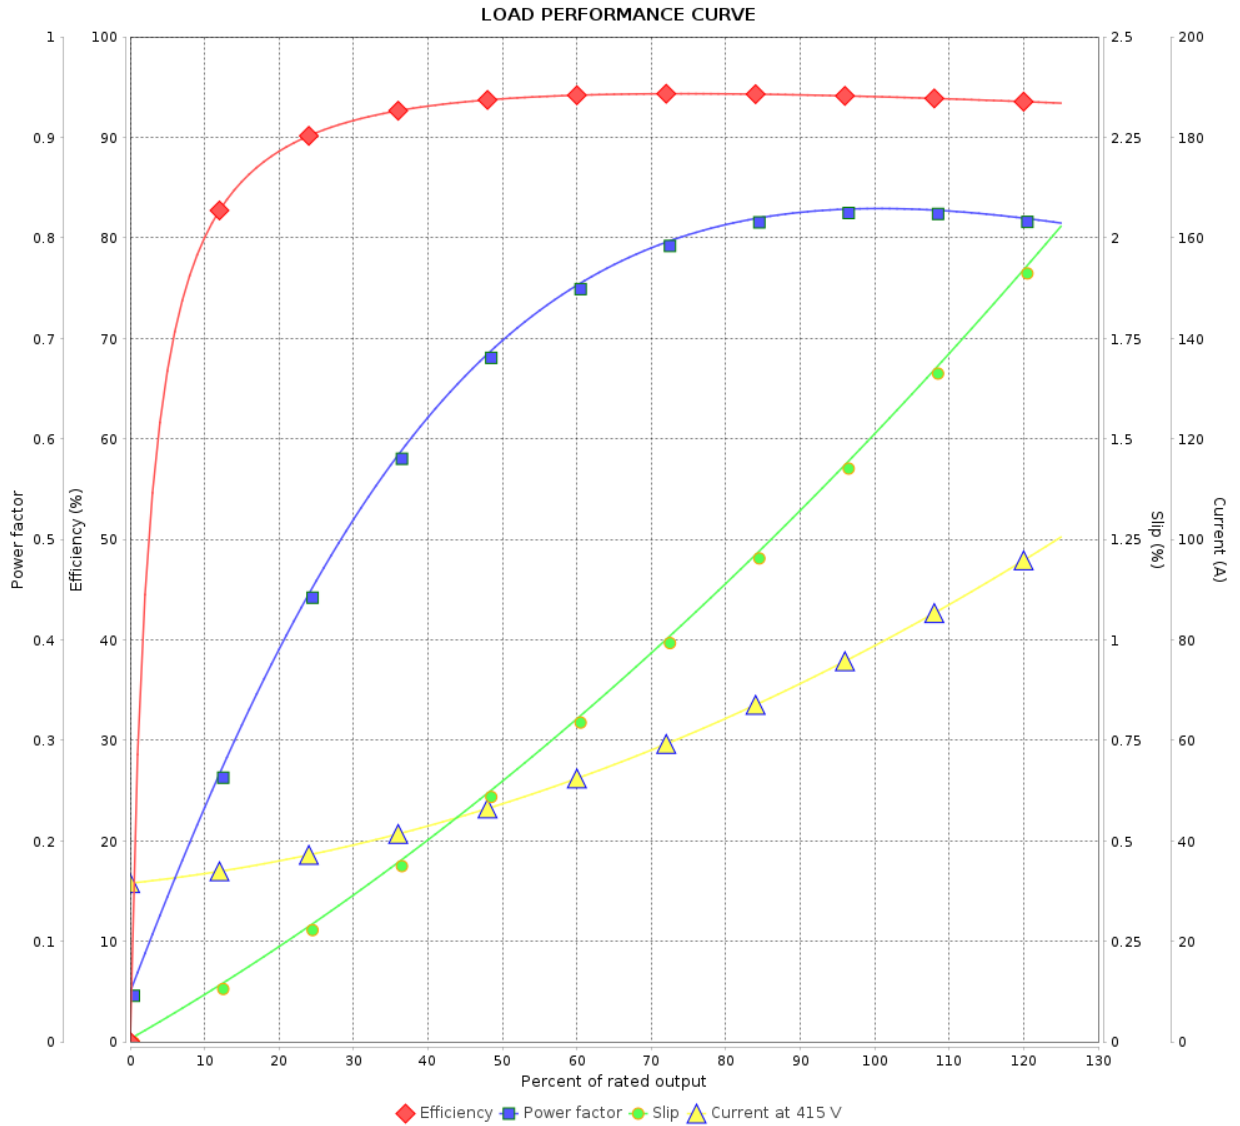

Performance : 415 V 50 Hz 4P IE2

Rated current : 80.2 A
 LRC : 6.2
 Rated torque : 29.5 kgfm
 Locked rotor torque : 200 %
 Breakdown torque : 229 %
 Rated speed : 1477 rpm

Moment of inertia (J) : 0.9448 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 105 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				