

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :						
Product line : W22 NEMA Premium Efficiency Three-Phase			Product code : 14895136			
Frame	: 586/7T		Locked rotor time	: 54s (cold) 30s (hot)		
Output	: 300 HP (220 kW)		Temperature rise	: 80 K		
Poles	: 6		Duty cycle	: Cont.(S1)		
Frequency	: 60 Hz		Ambient temperature	: -20°C to +40°C		
Rated voltage	: 575 V		Altitude	: 1000 m.a.s.l.		
Rated current	: 299 A		Protection degree	: IP55		
L. R. Amperes	: 1795 A		Cooling method	: IC411 - TEFC		
LRC	: 6.0x(Code G)		Mounting	: F-1		
No load current	: 145 A		Rotation ¹	: Both (CW and CCW)		
Rated speed	: 1193 rpm		Noise level ²	: 77.0 dB(A)		
Slip	: 0.58 %		Starting method	: Direct On Line		
Rated torque	: 182 kgfm		Approx. weight ³	: 1637 kg		
Locked rotor torque	: 210 %					
Breakdown torque	: 250 %					
Insulation class	: F					
Service factor	: 1.15					
Moment of inertia (J)	: 11.7 kgm ²					
Design	: B					
Output	50%	75%	100%	Foundation loads		
Efficiency (%)	94.3	95.5	95.8	Max. traction : 2305 kgf		
Power Factor	0.60	0.71	0.77	Max. compression : 3942 kgf		
Losses at normative operating points (speed;torque), in percentage of rated output power						
P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
4.8	3.7	3.1	2.7	1.8	1.4	0.8
		<u>Drive end</u>		<u>Non drive end</u>		
Bearing type	:	6322 C3		6319 C3		
Sealing	:	Taconite Labyrinth		Taconite Labyrinth		
Lubrication interval	:	11000 h		13000 h		
Lubricant amount	:	60 g		45 g		
Lubricant type	:	Mobil Polyrex EM				
Notes:						
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.				These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary			Performed	Checked	Date
Performed by						
Checked by					Page	Revision
Date	15/01/2024				1 / 3	

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Space heater information

Voltage: 200 - 240 V

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	15/01/2024		2 / 3	

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 14895136

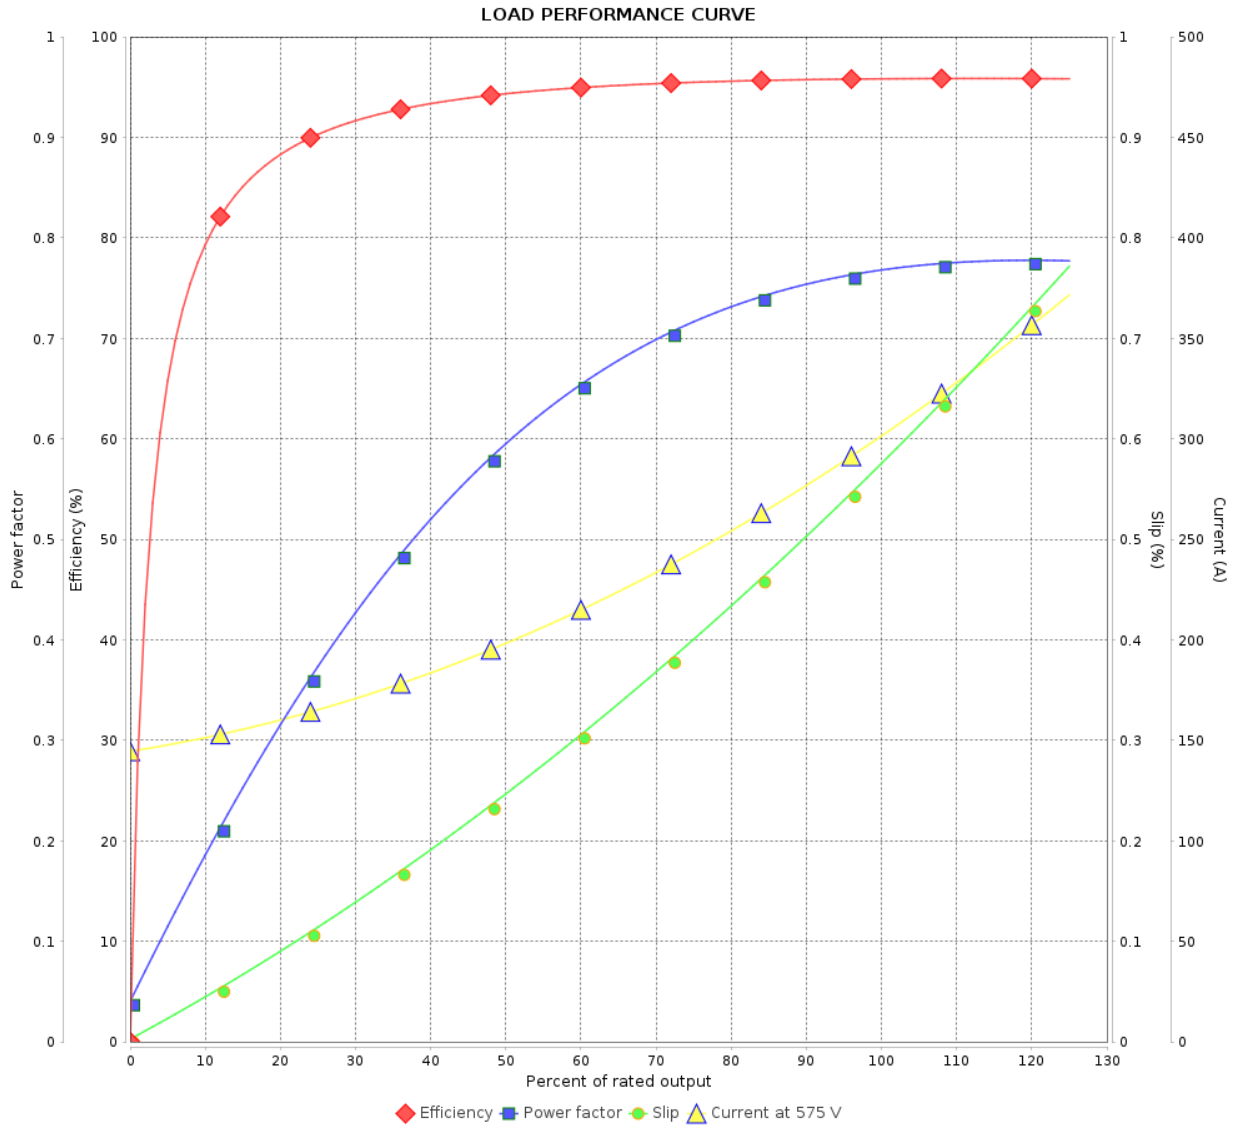

Performance : 575 V 60 Hz 6P

Rated current : 299 A
 LRC : 6.0
 Rated torque : 182 kgfm
 Locked rotor torque : 210 %
 Breakdown torque : 250 %
 Rated speed : 1193 rpm

Moment of inertia (J) : 11.7 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		3 / 3		
Date		15/01/2024		