

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :							
Product line		: W21 Explosion Proof NEMA Premium Efficiency Three-Phase		Product code : 12033175			
Frame	:	404/5T		Locked rotor time	:	27s (cold) 15s (hot)	
Output	:	75 HP (55 kW)		Temperature rise	:	80 K	
Poles	:	6		Duty cycle	:	Cont.(S1)	
Frequency	:	60 Hz		Ambient temperature	:	-20°C to +40°C	
Rated voltage	:	575 V		Altitude	:	1000 m.a.s.l.	
Rated current	:	69.6 A		Protection degree	:	IP55	
L. R. Amperes	:	536 A		Cooling method	:	IC411 - TEFC	
LRC	:	7.7x(Code J)		Mounting	:	F-1	
No load current	:	25.0 A		Rotation ¹	:	Both (CW and CCW)	
Rated speed	:	1185 rpm		Noise level ²	:	65.0 dB(A)	
Slip	:	1.25 %		Starting method	:	Direct On Line	
Rated torque	:	45.9 kgfm		Approx. weight ³	:	562 kg	
Locked rotor torque	:	250 %					
Breakdown torque	:	260 %					
Insulation class	:	F					
Service factor	:	1.15					
Moment of inertia (J)	:	1.69 kgm ²					
Design	:	B					
Output	50%	75%	100%	Foundation loads			
Efficiency (%)	94.1	95.0	94.5	Max. traction		: 894 kgf	
Power Factor	0.72	0.81	0.84	Max. compression		: 1456 kgf	
				<u>Drive end</u>		<u>Non drive end</u>	
Bearing type	:	NU-217 C3		6314 C3			
Sealing	:	Oil Seal		Lip Seal			
Lubrication interval	:	10272 h		14267 h			
Lubricant amount	:	21 g		27 g			
Lubricant type	:	Mobil Polyrex EM					
Notes							
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.				These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.			
Rev.	Changes Summary			Performed	Checked	Date	
Performed by							
Checked by					Page	Revision	
Date	22/10/2023				1 / 3		

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Thermal protection

ID	Application	Type	Quantity	Sensing Temperature
1	Winding	Thermostat - 2 wires	1 x Phase	155 °C

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	22/10/2023		2 / 3	

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W21 Explosion Proof NEMA Premium
Efficiency Three-Phase

Product code : 12033175

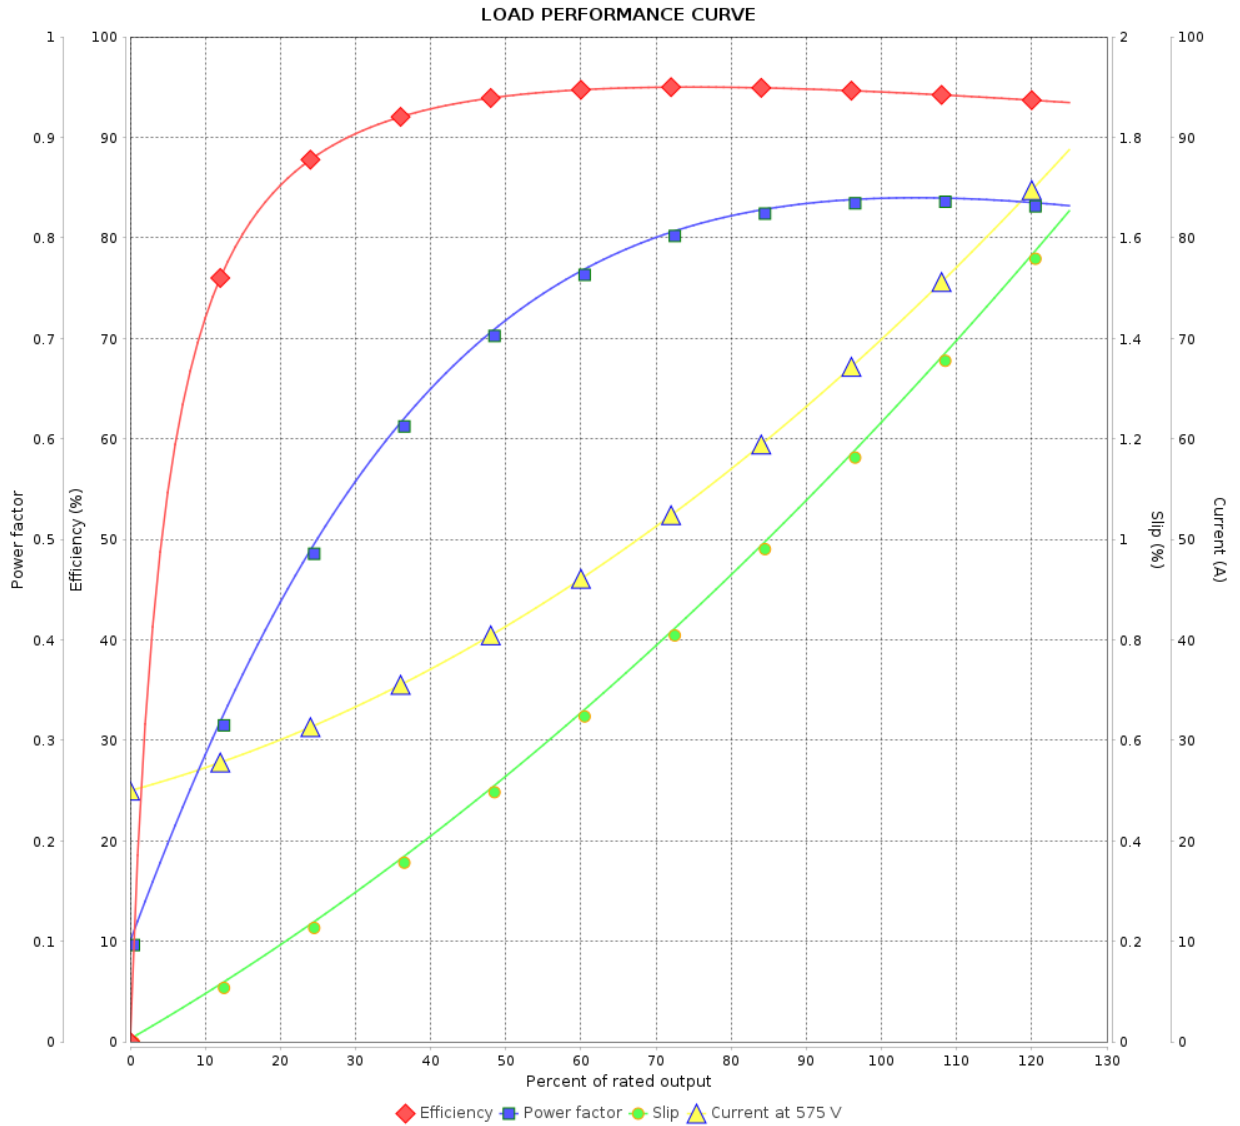

Performance : 575 V 60 Hz 6P

Rated current : 69.6 A
 LRC : 7.7
 Rated torque : 45.9 kgfm
 Locked rotor torque : 250 %
 Breakdown torque : 260 %
 Rated speed : 1185 rpm

Moment of inertia (J) : 1.69 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				