

# DATA SHEET



## Three Phase Induction Motor - Squirrel Cage

Customer :						
Product line : W22 NEMA Premium Efficiency Three-Phase			Product code : 14025260			
Frame	: 447/9T		Locked rotor time	: 23s (cold) 13s (hot)		
Output	: 200 HP (150 kW)		Temperature rise	: 80 K		
Poles	: 8		Duty cycle	: Cont.(S1)		
Frequency	: 60 Hz		Ambient temperature	: -20°C to +40°C		
Rated voltage	: 575 V		Altitude	: 1000 m.a.s.l.		
Rated current	: 203 A		Protection degree	: IP55		
L. R. Amperes	: 1300 A		Cooling method	: IC411 - TEFC		
LRC	: 6.4x(Code H)		Mounting	: F-1		
No load current	: 92.0 A		Rotation <sup>1</sup>	: Both (CW and CCW)		
Rated speed	: 890 rpm		Noise level <sup>2</sup>	: 66.0 dB(A)		
Slip	: 1.11 %		Starting method	: Direct On Line		
Rated torque	: 163 kgfm		Approx. weight <sup>3</sup>	: 1387 kg		
Locked rotor torque	: 200 %					
Breakdown torque	: 220 %					
Insulation class	: F					
Service factor	: 1.15					
Moment of inertia (J)	: 6.78 kgm <sup>2</sup>					
Design	: B					
Output	50%	75%	100%	Foundation loads		
Efficiency (%)	94.5	95.0	95.0	Max. traction : 2445 kgf		
Power Factor	0.62	0.73	0.78	Max. compression : 3832 kgf		
Losses at normative operating points (speed;torque), in percentage of rated output power						
P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
5.4	4.3	3.8	2.9	2.0	1.5	1.0
		<u>Drive end</u>		<u>Non drive end</u>		
Bearing type	:	6322 C3		6319 C3		
Sealing	:	WSeal		WSeal		
Lubrication interval	:	14000 h		17000 h		
Lubricant amount	:	60 g		45 g		
Lubricant type	:	Mobil Polyrex EM				
Notes:						
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.				These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary			Performed	Checked	Date
Performed by						
Checked by					Page	Revision
Date	16/01/2024				1 / 2	

# LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 14025260

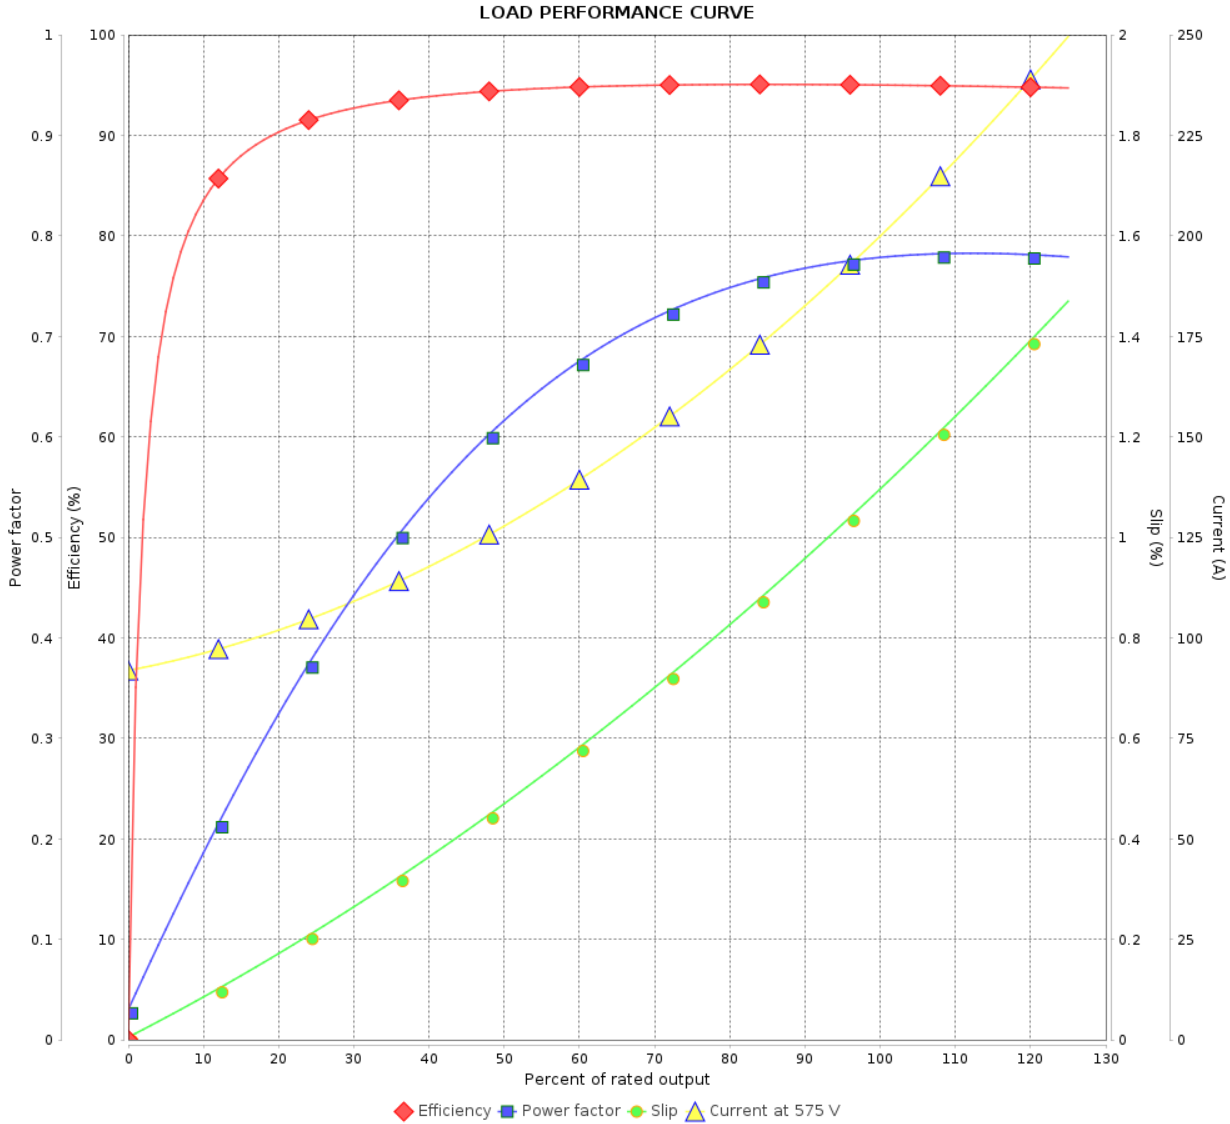

Performance : 575 V 60 Hz 8P

Rated current : 203 A  
 LRC : 6.4  
 Rated torque : 163 kgfm  
 Locked rotor torque : 200 %  
 Breakdown torque : 220 %  
 Rated speed : 890 rpm

Moment of inertia (J) : 6.78 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.15  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		2 / 2		
Date	16/01/2024			