

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :						
Product line : W22 NEMA Premium Efficiency Three-Phase			Product code : 14525912			
Frame	: L447/9TS		Locked rotor time	: 39s (cold) 22s (hot)		
Output	: 400 HP (300 kW)		Temperature rise	: 80 K		
Poles	: 2		Duty cycle	: Cont.(S1)		
Frequency	: 60 Hz		Ambient temperature	: -20°C to +40°C		
Rated voltage	: 575 V		Altitude	: 1000 m.a.s.l.		
Rated current	: 354 A		Protection degree	: IP55		
L. R. Amperes	: 3253 A		Cooling method	: IC411 - TEFC		
LRC	: 9.2x(Code K)		Mounting	: F-1		
No load current	: 94.4 A		Rotation ¹	: Both (CW and CCW)		
Rated speed	: 3583 rpm		Noise level ²	: 88.0 dB(A)		
Slip	: 0.47 %		Starting method	: Direct On Line		
Rated torque	: 81.0 kgfm		Approx. weight ³	: 1435 kg		
Locked rotor torque	: 260 %					
Breakdown torque	: 290 %					
Insulation class	: F					
Service factor	: 1.00					
Moment of inertia (J)	: 3.87 kgm ²					
Design	: A					
Output	50%	75%	100%	Foundation loads		
Efficiency (%)	95.4	95.8	95.8	Max. traction : 1338 kgf		
Power Factor	0.80	0.85	0.89	Max. compression : 2773 kgf		
Losses at normative operating points (speed;torque), in percentage of rated output power						
P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
5.1	3.7	3.1	2.6	1.5	1.0	0.5
		<u>Drive end</u>		<u>Non drive end</u>		
Bearing type	:	6314 C3		6314 C3		
Sealing	:	WSeal		WSeal		
Lubrication interval	:	4000 h		4000 h		
Lubricant amount	:	27 g		27 g		
Lubricant type	:	Mobil Polyrex EM				
Notes:						
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.				These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary			Performed	Checked	Date
Performed by						
Checked by					Page	Revision
Date	13/01/2024				1 / 2	

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 14525912

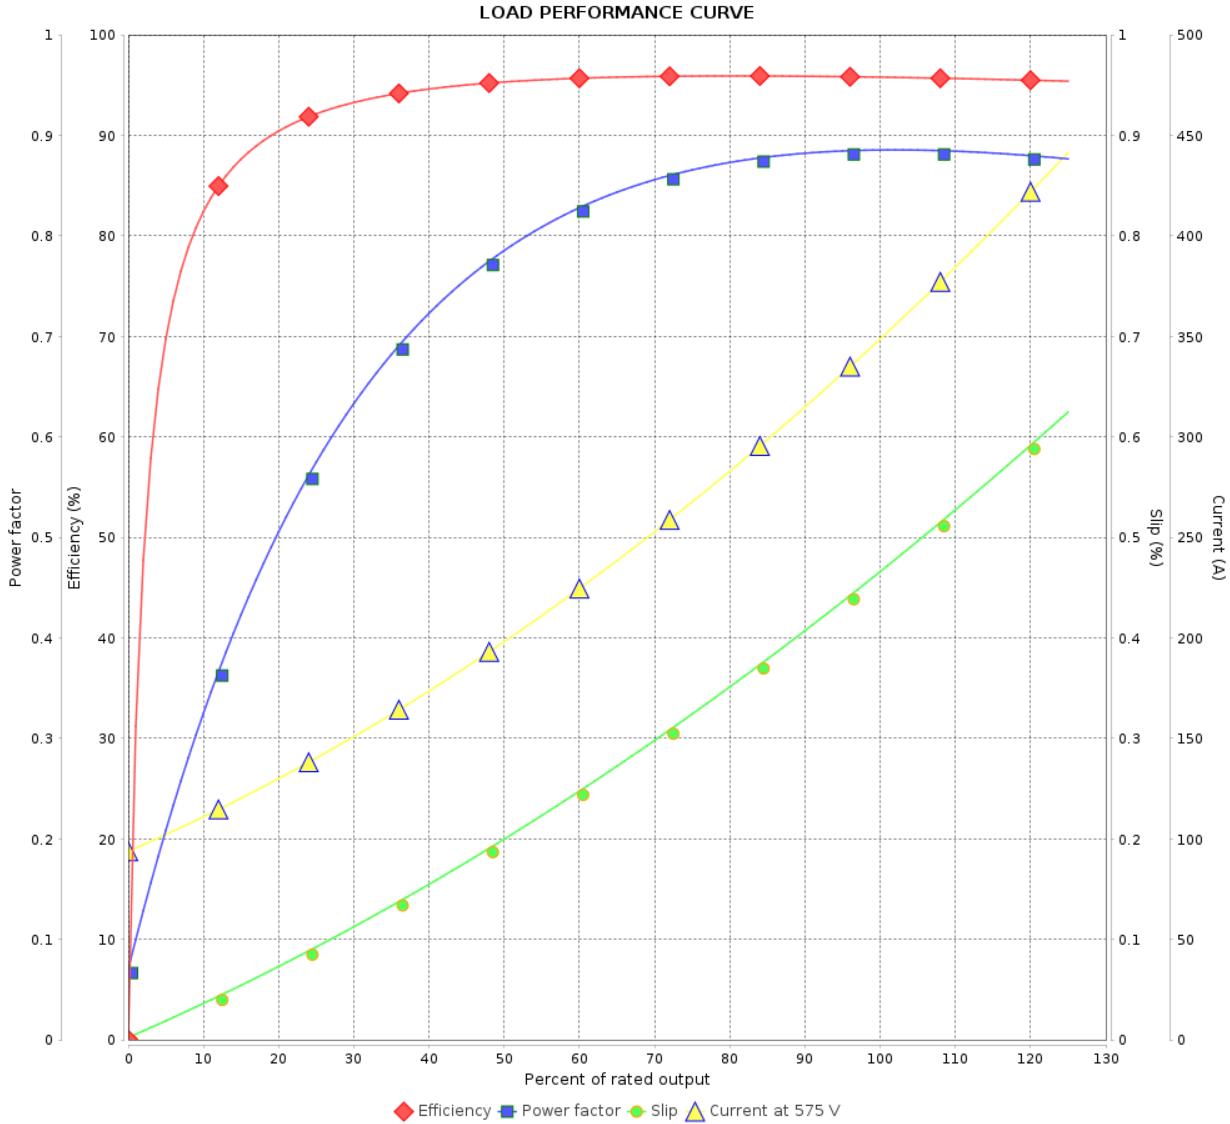

Performance : 575 V 60 Hz 2P

Rated current	: 354 A	Moment of inertia (J)	: 3.87 kgm ²
LRC	: 9.2	Duty cycle	: Cont.(S1)
Rated torque	: 81.0 kgfm	Insulation class	: F
Locked rotor torque	: 260 %	Service factor	: 1.00
Breakdown torque	: 290 %	Temperature rise	: 80 K
Rated speed	: 3583 rpm	Design	: A

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 2	Revision
Checked by				
Date	13/01/2024			