

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :						
Product line : W22 NEMA Premium Efficiency Three-Phase			Product code : 14631577			
Frame	: 586/7T			Locked rotor time	: 54s (cold) 30s (hot)	
Output	: 250 HP (185 kW)			Temperature rise	: 80 K	
Poles	: 6			Duty cycle	: Cont.(S1)	
Frequency	: 60 Hz			Ambient temperature	: -20°C to +40°C	
Rated voltage	: 575 V			Altitude	: 1000 m.a.s.l.	
Rated current	: 239 A			Protection degree	: IP55	
L. R. Amperes	: 1459 A			Cooling method	: IC411 - TEFC	
LRC	: 6.1x(Code G)			Mounting	: F-1	
No load current	: 96.0 A			Rotation ¹	: Both (CW and CCW)	
Rated speed	: 1192 rpm			Noise level ²	: 77.0 dB(A)	
Slip	: 0.67 %			Starting method	: Direct On Line	
Rated torque	: 152 kgfm			Approx. weight ³	: 1562 kg	
Locked rotor torque	: 190 %					
Breakdown torque	: 210 %					
Insulation class	: F					
Service factor	: 1.15					
Moment of inertia (J)	: 9.53 kgm ²					
Design	: B					
Output	25%	50%	75%	100%	Foundation loads	
Efficiency (%)	0.000	95.0	95.4	95.8	Max. traction	: 1407 kgf
Power Factor	0.00	0.68	0.77	0.81	Max. compression	: 2969 kgf
Losses at normative operating points (speed;torque), in percentage of rated output power						
P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
4.7	3.4	2.7	2.9	1.8	1.4	0.8
		<u>Drive end</u>		<u>Non drive end</u>		
Bearing type	:	6322 C3		6319 C3		
Sealing	:	Taconite Labyrinth		Taconite Labyrinth		
Lubrication interval	:	11000 h		13000 h		
Lubricant amount	:	60 g		45 g		
Lubricant type	:	Mobil Polyrex EM				
Notes:						
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.				These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary			Performed	Checked	Date
Performed by						
Checked by					Page	Revision
Date	15/01/2024				1 / 3	

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Space heater information

Voltage: 200 - 240 V

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	15/01/2024		2 / 3	

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 14631577

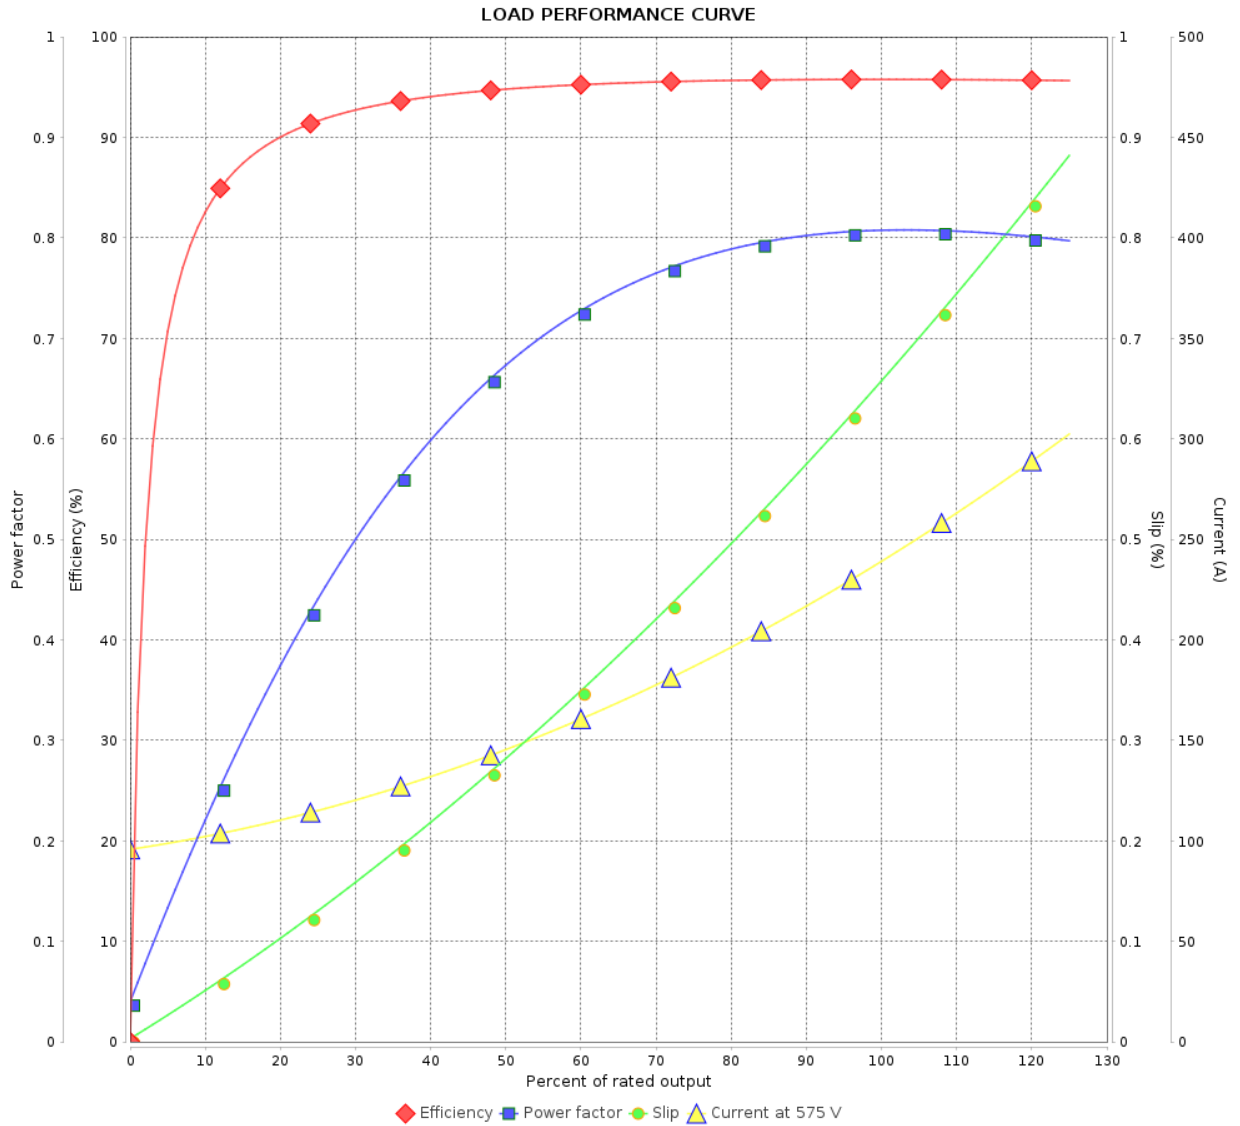

Performance : 575 V 60 Hz 6P

Rated current : 239 A
 LRC : 6.1
 Rated torque : 152 kgfm
 Locked rotor torque : 190 %
 Breakdown torque : 210 %
 Rated speed : 1192 rpm

Moment of inertia (J) : 9.53 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		3 / 3		
Date		15/01/2024		